

## DS-C66S-20NO Electrical LED Controller Board




- Occupies two slots and integrates LED controller functionality, supporting direct connection to LED cabinets via network cables with custom resolution and load output.
- Provides 20 Gigabit Ethernet ports for output.
- Supports both mini loading mode (0.65MP per Ethernet port) and standard loading mode (2.925MP per Ethernet port). Standard load mode requires compatible screen support.
- Supports HDR output.

## ▪ Specification

Chassis	
Occupied Slot	Output slot
Video Wall	
Layers	64 layers of 2K/4K per board
General	
HDR	Supports HDR10, compliant with SMPTE ST 2084/SMPTE ST 2086 standards. Supports HLG.
Video Output	
Max. Video Output Resolution	10400000
Video Output Resolution	Custom resolution range: Loading resolution must be smaller than 10.4 MP. Width: 64 to 16384 (width aligned to 4), Height: 64 to 8192
Video Output Interface Type	RJ-45
Loading Capacity for Video Output to LED	Single port load 10400000, Width 64 - 16384, Height 64 - 8192
LED Loading Interfaces	20

▪ Dimension

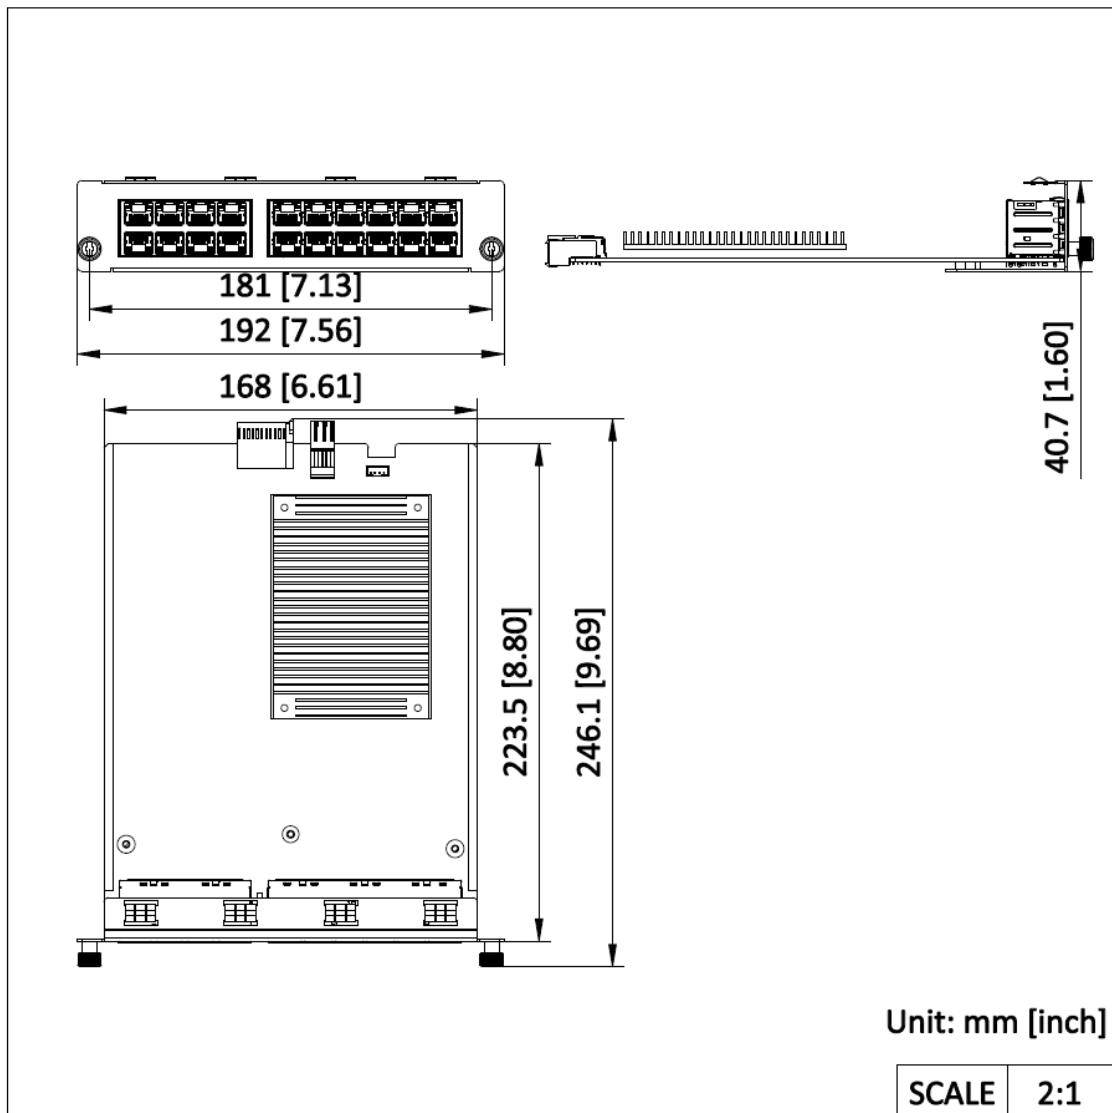

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

