

DS-C66S-DEC Decoding Board




- Supports a maximum of 2 decoding boards.
- Supports decoding a maximum of 1 channel of 32 MP@30 fps data or 2 channels of 16 MP@30 fps data.
- Supports de-multiplexing of PS, TS, ES, and RTP streams.
- Supports H.265, H.264, Smart H.265, and Smart H.264 video decoding.
- Supports G711-A, G711-U, G722.1, G726-16/U, MPEG, and AAC-LC audio decoding.

▪ Specification

Chassis	
Occupied Slot	Input slot
Video Wall	
Window Division	1, 4, 9, 16
Video Decoding	
Video Decoding Format	H.264, H.265, Smart264, Smart265, MJPEG
Video Decoding Channels	48
Video Decoding Capability	Supports 48 channels of 720P30, or 24 channels of 1080P30, or 12 channels of 4MP, or 8 channels of 6MP, or 4 channels of 8MP, or 2 channels of 12MP, or 2 channels of 16MP, or 1 channel of 24MP, or 1 channel of 32MP.
Audio Decoding	
Audio Decoding Format	G711-A , G711-U , G722.1 , G726-16/U/A , MPEG , AAC-LC
Audio Decoding Channels	48

▪ Dimension

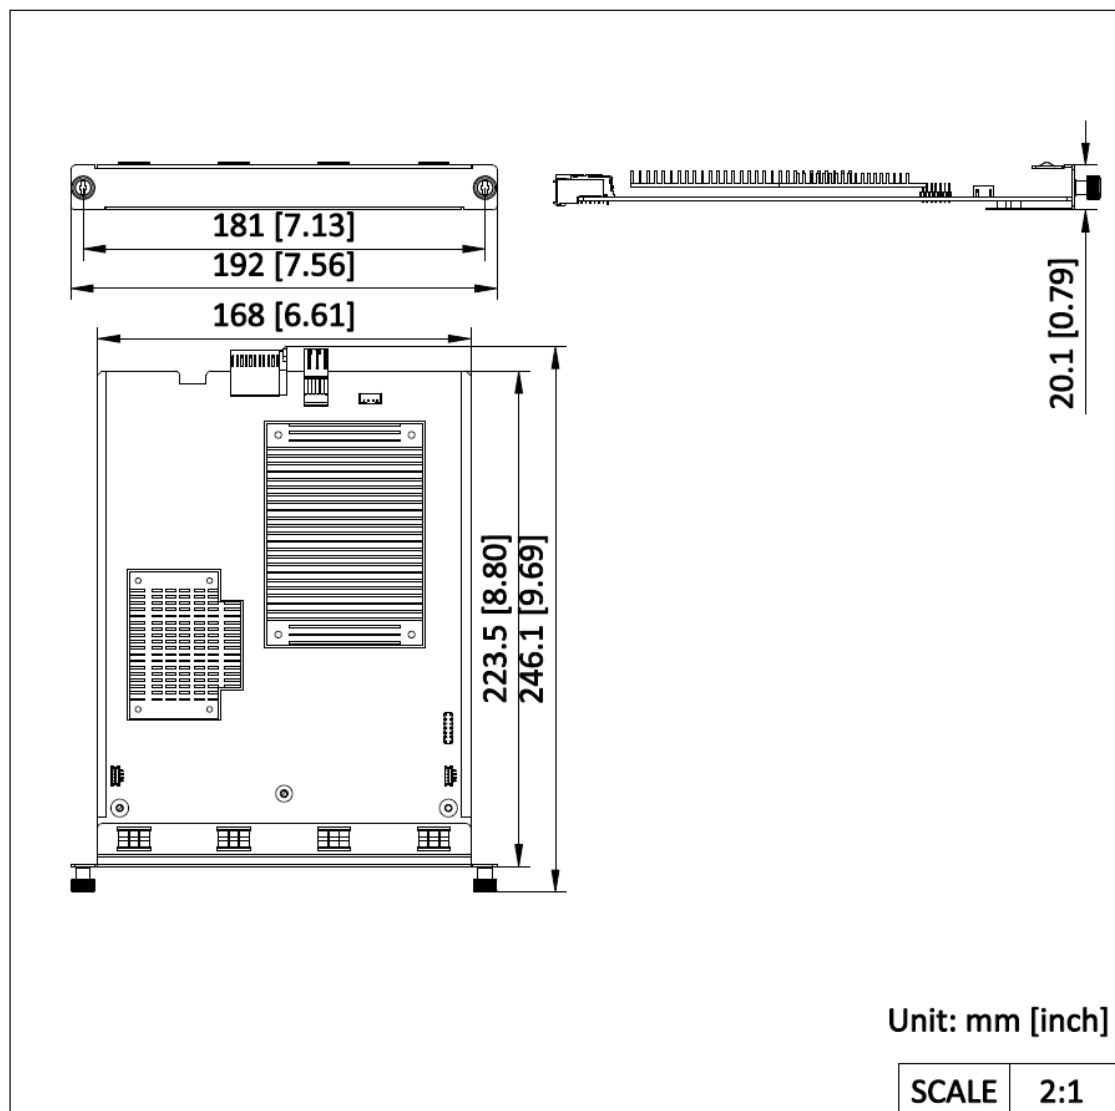

See Far, Go Further



www.hikvision.com
support@hikvision.com

