

DS-C66S-02HI/4K
2-Channel 4K HDMI Input Board




- Supports 2 channels of 4K60 HDMI signal input.
- Supports HDMI composite audio input.
- Supports HDR10 access.
- Supports HDCP access.

▪ Specification

Processing Performance	
Input Frame Rate	24 Hz to 120 Hz
Chassis	
Occupied Slot	Input slot
General	
HDR	Supports HDR10, compliant with SMPTE ST 2084/SMPTE ST 2086 standards. Supports HLG.
HDCP	Supports HDCP 2.3, with backward compatibility to HDCP 2.2/HDCP 1.4/HDCP 1.3.
Audio	
Audio Channel	Dual channel
Audio Input	
Audio Input Interface	2 × in-band audio
Audio Sampling Rate	32/44.1/48 kHz
Video Input	
Video Input Interface Type	HDMI2.0
Video Input Interfaces	2
Max. Video Input Resolution	4K
Video Input Resolution	4096 × 2160@60 Hz, 4096 × 2160@30 Hz, 3840 × 2160@60 Hz, 3840 × 2160@30 Hz, 1920 × 1200@60 Hz, 1920 × 1080p@60 Width: 800 to 8192, height: 600 to 8192 (width aligned to 4, height aligned to 2), frame rate: 30/60 Hz. At 30 Hz: Resolution range 1920 × 1080 ~ 4096 × 2160. At 60 Hz: Resolution range 800 × 600 ~ 4096 × 2160.

▪ Dimension

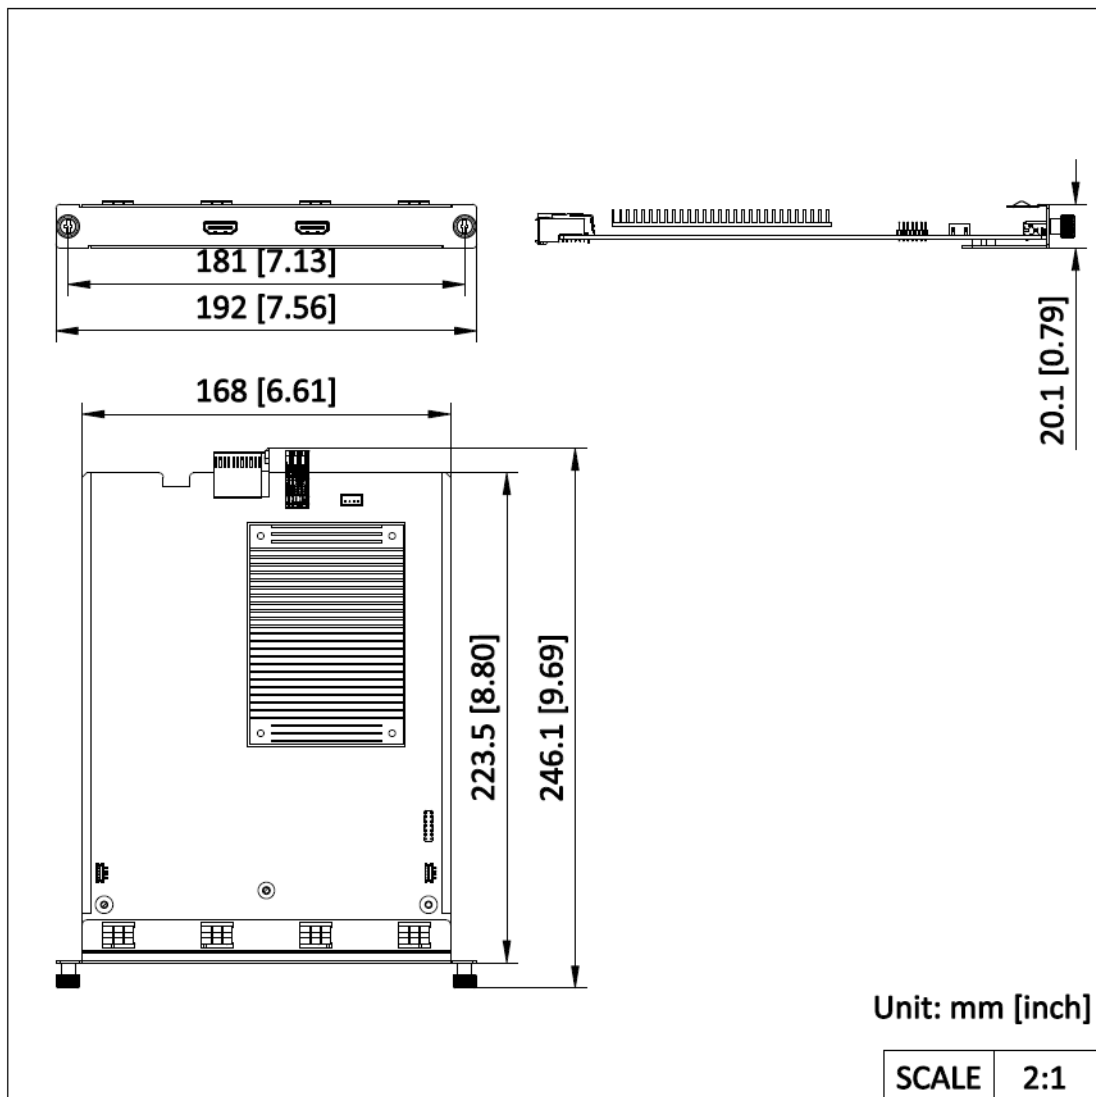

See Far, Go Further



www.hikvision.com
support@hikvision.com

