


**DS-C66S-PRE  
Preview Board**

- Supports a maximum of 1 preview board.
- Supports displaying a video wall image on the screen connected to the HDMI port of the preview board. The image is smooth without black screen or blue screen.
- Support displaying a video wall image on the remote client. The image is smooth without black screen or blue screen
- Supports live view of local signal source on the remote client.

▪ **Specification**

Chassis	
Occupied Slot	Output slot
Video Wall	
Video Wall Live View	Supported(16-channel D1 or 32CIF)
Video Wall Preview	1channel of 1080p60 local preview 1 channel of 1080p30 client-based preview

▪ **Dimension**

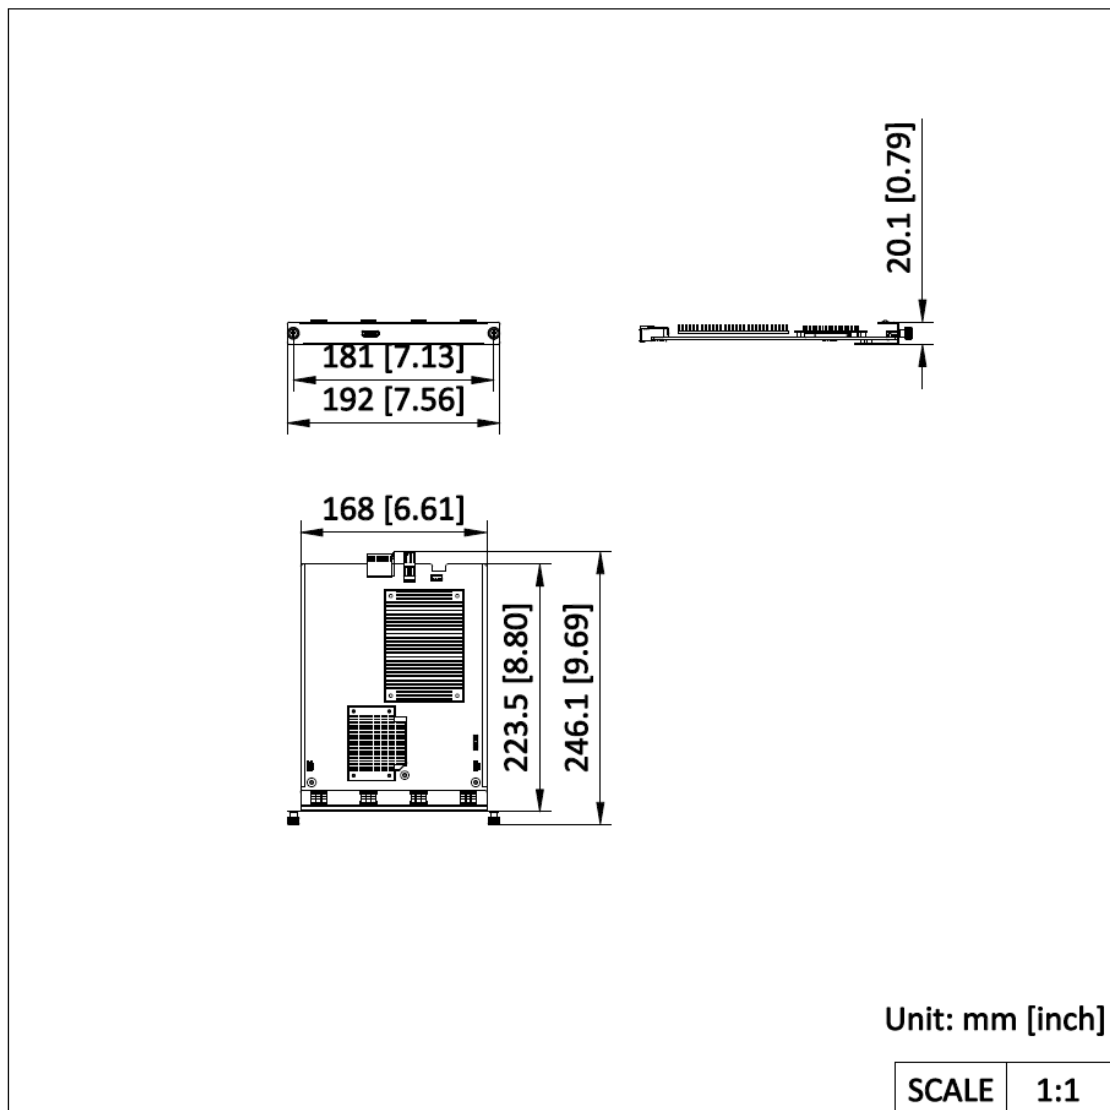

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

