

DS-C66S-04HI
4-Channel HDMI Input Board




- Supports 4 channels of 2K HDMI signal input.
- Supports HDMI composite audio input.
- Supports HDCP access.

▪ Specification

Processing Performance	
Input Frame Rate	24 Hz to 60 Hz
Chassis	
Occupied Slot	Input slot
General	
HDCP	Supports HDCP 1.4 with backward compatibility to HDCP 1.3
Audio	
Audio Channel	Dual channel
Audio Input	
Audio Input Interface	4 × in-band audio
Audio Sampling Rate	32/44.1/48 kHz
Video Input	
Video Input Interface Type	HDMI1.4
Video Input Interfaces	4
Max. Video Input Resolution	1080P
Video Input Resolution	<p>1024 × 768@60 Hz, 1280 × 1024@60 Hz, 1366 × 768@60 Hz, 1440 × 900@60 Hz, 1680 × 1050@60 Hz, 1280 × 960@60 Hz, 1600 × 1200@60 Hz, 1280 × 720P@50 Hz, 1280 × 720P@60 Hz, 1920 × 1080P@25 Hz, 1920 × 1080P@30 Hz, 1920 × 1080P@50 Hz, 1920 × 1080P@60 Hz, 1920 × 1200@60 Hz</p> <p>Custom resolution range: Width: 800 to 2560, height: 600 to 2560 (width aligned to 4, height aligned to 2), frame rate: 30/60 Hz. At 30 Hz: Resolution range 1280 × 720 ~ 2048 × 1152. At 60 Hz: Resolution range 800 × 600 ~ 2048 × 1152.</p>

▪ Dimension

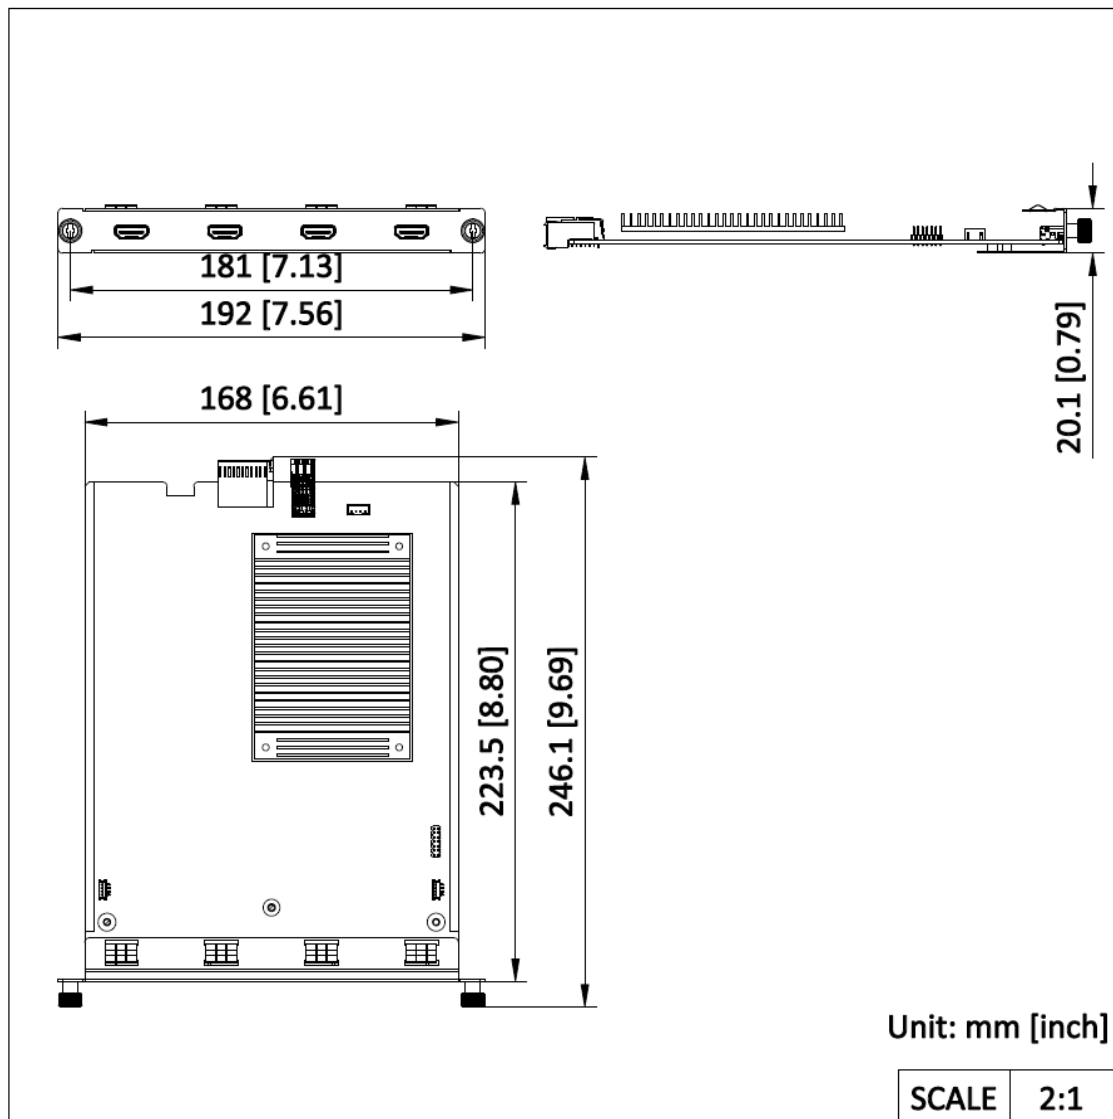

See Far, Go Further



www.hikvision.com
support@hikvision.com

