

DS-C66S-04SDI/4K
4-Channel 4K SDI Input Board




- Supports 12G input, with backward compatibility to 6G/3G SDI input.
- Supports HDR access.

▪ Specification

Processing Performance	
Input Frame Rate	25 Hz to 60 Hz
Chassis	
Occupied Slot	Input slot
General	
HDR	Supports HDR10, compliant with SMPTE ST 2084/SMPTE ST 2086 standards. Supports HLG.
Audio	
Audio Channel	Dual channel
Audio Input	
Audio Input Interface	4 × in-band audio
Audio Sampling Rate	32/44.1/48 kHz
Video Input	
Video Input Interface Type	12G-SDI
Video Input Interfaces	4 (4 input+4 loop-through output)
Max. Video Input Resolution	4K
Video Input Resolution	Supports ST-2082 (12G), ST-2081 (6G), ST-424 (3G), and ST-292 (HD) standard video input. Supports 3G-Level A/Level B (DS mode).

▪ Dimension

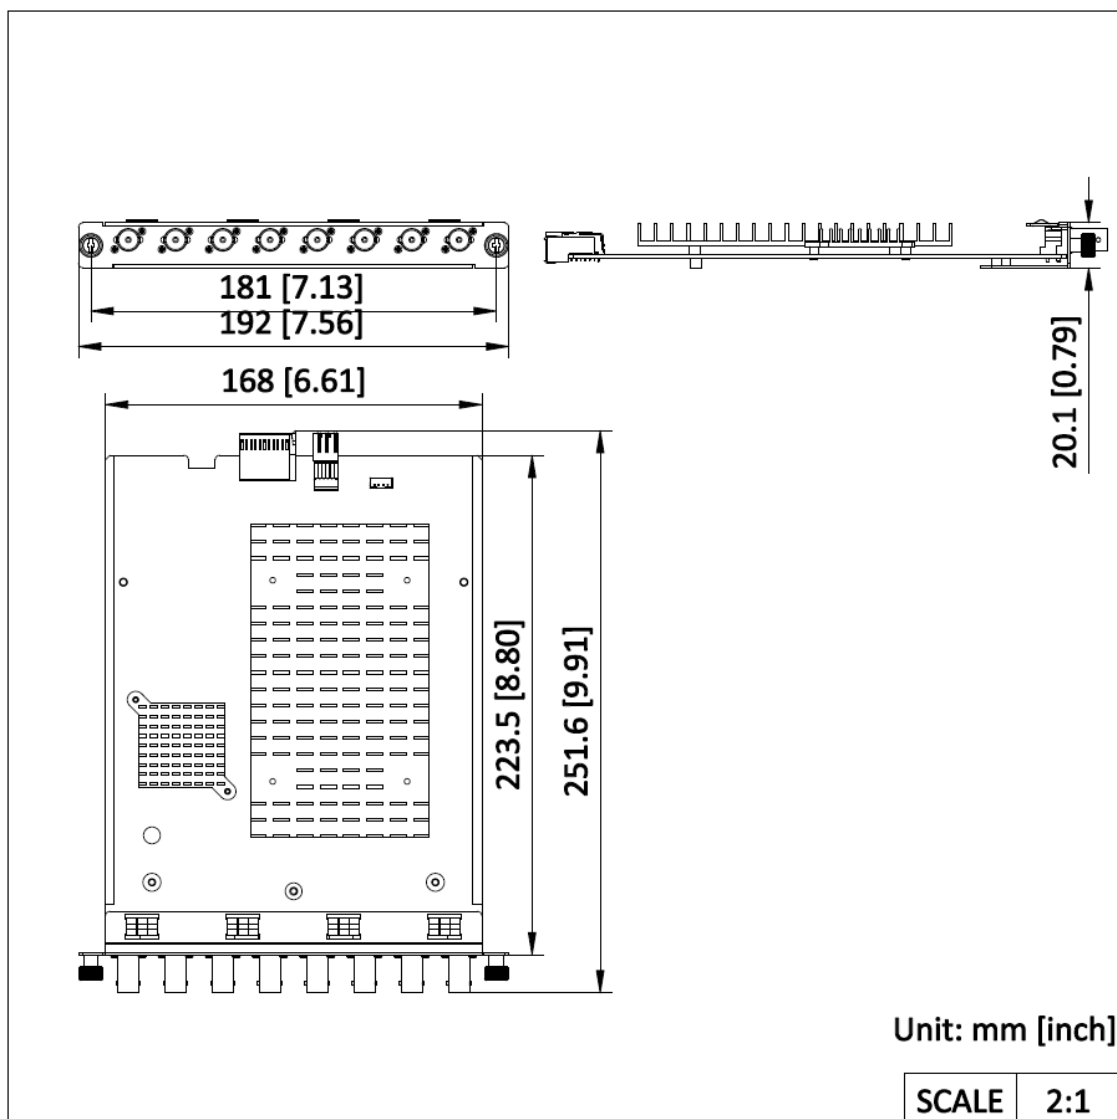

See Far, Go Further



www.hikvision.com
support@hikvision.com

