

DS-2CE52K0T-LPS 3K Smart Hybrid Light Audio Fisheye Camera



- High quality imaging with 3K, 2960 × 1665 resolution
- 1.8 mm fixed focal lens
- Smart-Hybrid light, optimize your security with flexible lighting options
- 180° fisheye view
- 3D DNR technology delivers clean and sharp images
- Up to 10 m white light and 10 m IR distance for bright night imaging
- High quality audio with audio over coaxial cable, built-in mic
- Water and dust resistant (IP67) and vandal resistant (IK08)



▪ Specification

Camera	
Image Sensor	3K CMOS
Max. Resolution	2960 (H) × 1665 (V)
Min. Illumination	0.01 Lux @ (F2.0,AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s,NTSC: 1/30 s to 1/50,000 s
Day & Night	ICR
Signal System	PAL/NTSC
Lens	
Lens Type	1.8 mm fixed focal lens
Focal Length & FOV	1.8 mm, horizontal FOV: 180°, vertical FOV: 114°, diagonal FOV: 180°
Lens Mount	M12
Microphone	
Pickup Distance	In a radius of up to 10 m
Amount	1
Illuminator	
Supplement Light Type	Smart, IR, White Light
Supplement Light Range	IR: Up to 10 m,White Light: Up to 10 m
Image	
Image Parameters Switch	STD/HIGH-SAT/HIGHLIGHT
Image Settings	Saturation,Brightness,Contrast,Sharpness,Anti-banding,AGC
Frame Rate	TVI: 3K @10 fps/12.5 fps/20 fps/25 fps, 4 MP @25 fps/30 fps, 1080P @25 fps/30 fps
Day/Night Mode	Auto/Color
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	BLC,HLC,Global,DWDR
Noise Reduction	3D DNR
White Balance	Auto,Manual
Interface	
Video Output	1 HD analog output
General	
Power	12 VDC ± 25%, max. 8.2 W, *You are recommended to use one power adapter to supply the power for one camera. If a high-impedance cable is used (such as the 18 m extension cable in the kit package), a 15 VDC adapter is required.
Material	Plastic
Dimension	Ø121.78 mm × 59.5 mm (Ø4.79" × 2.34")
Weight	Approx. 270 g (0.595 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 160 °F). Humidity 90% or less (non-condensing)
Communication	HIKVISION-C
Language	English
Approval	
Protection	IP67,IK08

▪ Available Model

DS-2CE52K0T-LPS(1.8mm)

▪ **Dimension**

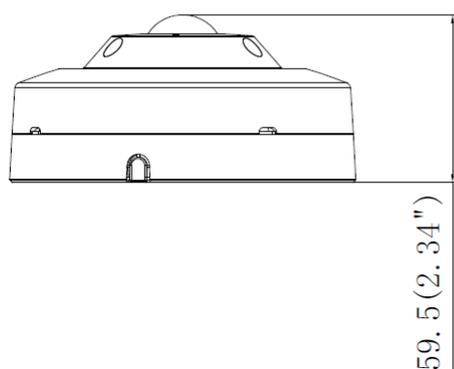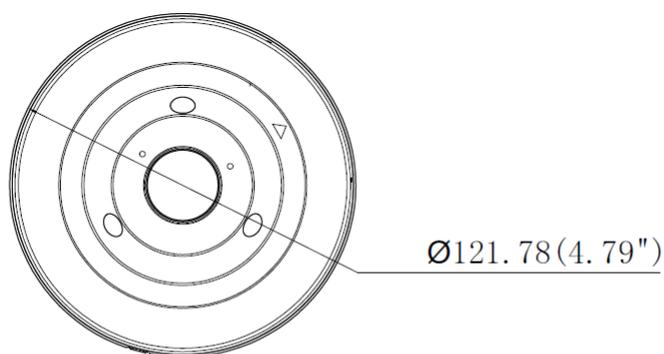

Unit:mm (inch)

▪ **Accessory**

▪ **Optional**

DS-1294ZJ	DS-1299ZJ	DS-1297ZJ-ES	DS-1297ZJ-M	DS-1281ZJ-DM27
				
DS-1297ZJ				
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

