

DS-TAC100-G Outdoor Pole Mounting Cabinet



- Structure: Welding structure, strong, firm and reliable
- The level of protection IP55 , protect the internal equipment without interference from external bad environment
- The main structure of the cabinet adopts is welding, part assembled, ensure the good protection
- With special outdoor cabinet lock, waterproof, good anti-theft performance
- Good environmental adaptability, can minimize the equipment rely on the environment and reliable grounding system
- Cable bottom in and out, waterproof and dustproof
- The cabinet uses the pole mounting, the installation height is 2.5m~3.5m from the ground (hoop should be customized), has the efficacy of avoiding insects and rats
- The cabinet door is windproof structure (i.e., threshold device)
- The cabinet can be used in conjunction with the terminal serve DS-TP50-08H and the switch

▪ Specification

General	
Description	Pole Mounting Cabinet
Material	SGCC
Weight	Approx. 9.9 kg (21.82 lb.)
With Package Weight	Approx. 11.1 kg (24.47 lb.)
Dimensions	320 mm × 440 mm × 500 mm (12.6" × 17.32" × 19.69") (L × W × H)
Package Dimensions	477 mm × 382 mm × 540 mm (18.78" × 15.4" × 21.26") (L × W × H)
Operating Condition	-30 °C to 70 °C (-22 °F to 158 °F). Humidity: 5% to 95% (non-condensing)

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.


This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Available Model

DS-TAC100-G/3/1

▪ Dimension

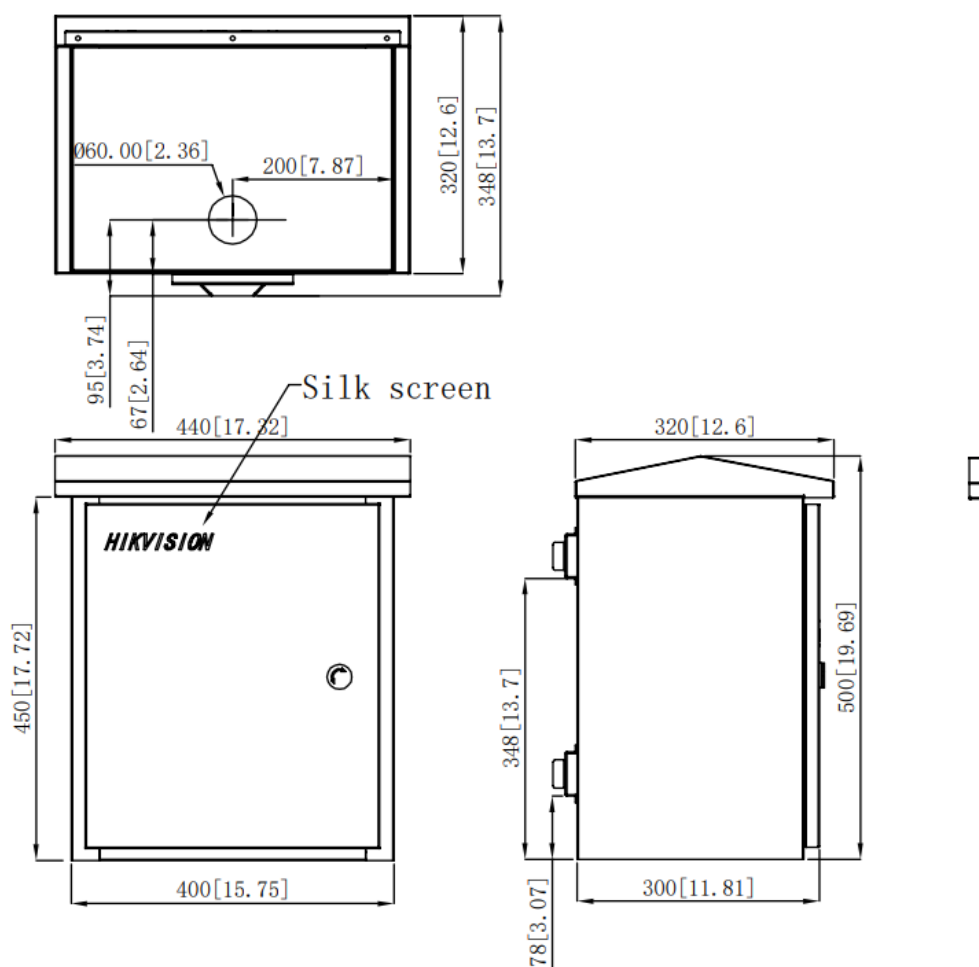

Unit:mm[inch]

L×W×H=320mm×440mm×500mm[12.6×17.32×19.69]

See Far, Go Further



www.hikvision.com
support@hikvision.com

