


## DS-KIS612-P IP Video Intercom Kit

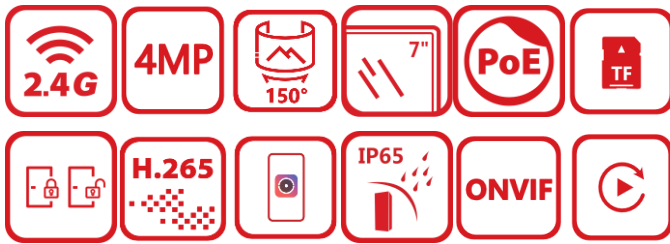


- 4MP higher resolution with 150° viewing angle
- 2 locks control
- Multiple unlocking methods: Card, PIN code, Bluetooth, Hik-Connect, indoor station
- Video recording and playback via indoor station or door station
- Standard PoE power supply
- Including: DS-KH6350-WTE1 x1, DS-KV6124-WBE1 x1, DS-KABV6114-RS x1, PSU × 2, 32GB TF card x1, Administrator Card x1, Key fob x 5

## ▪ Specification

<b>Door station</b>	
Operation system	LINUX
Processor	Embedded high performance processor
Memory	/
ROM	4 GB
RAM	512 MB
<b>Door station</b>	
Supplement light	IR light, up to 3 m
Resolution	Main stream: 4MP(2688x1520P), 2MP(1920x1080P), 1MP(1280x720P) Sub stream: 2MP(1920x1080P), 1MP(1280x720P), 0.3MP(640x480P)
Lens	1
FOV	Horizontal: 150°; Vertical: 75°
Video compression standard	H.264; H.265; MJPEG
<b>Door station</b>	
Volume adjustment	Adjustable
Audio Performance	50cm 80dB (Maximum: 50cm 83dB)
<b>Door station</b>	
User capacity	2000
Card capacity	6000
<b>Door station</b>	
Network protocol	TCP/IP, SIP, RSTP, IPV6, ONVIF
Wi-Fi	2.4GHz
Bluetooth	Supported
Wi-Fi Protocol	IEEE802.11b, IEEE802.11g, IEEE802.11n, IEEE802.11ax
Wi-Fi Type	WiFi 6
<b>Door station</b>	
Card Type	M1 Card
Card reading frequency	13.56 MHz
Authentication mode	Card, Bluetooth, PIN Code, Indoor Station, Hik-Connect
Card Reading Distance	M1card: 2to2.5cm
<b>Door station</b>	
Mobile APP	Hik-Connect
Motion Detection	Support
Playback	Support
Call Elevator	Support
Smart Features	Sound Classification Detection: Scream, Glass Breaking Sound, Crying Sound (Recommended Detection Distance: 3 m) , Gunshot
<b>Door station</b>	
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
Exit button	1
Lock control	2 relay, Max. 30 VDC 2 A
RS-485	1
Door contact input	1
Alarm input	4(include Exit button and Door contact input)


Alarm output	0
TAMPER	1
TF card	Support TF card, up to 128 G
Supported TF Format	FAT32,exFAT
<b>Door station</b>	
Button	1 physical button(s)
Indicator	3
Power consumption	< 10 W
Working temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Working humidity	10% to 90% (no-condensing)
Application environment	Outdoor
Dimension (W × H × D)	164 mm × 69 mm × 24.7 mm (6.46" × 2.72" × 0.97")
Protective level	IP65
Installation	Surface mounting
Weight	Without package: 273 g (0.61 lb),With package: 431g (0.95 lb)
Material	Front Shell and Rear Shell Material: Plastic Viewing Window Panel Material: Glass
Power supply	12 VDC, 1.2 A,IEEE 802.3 at, standard PoE
Language	English, Arabic, European French, Russian, European Spanish, Latin American Spanish, Italian, German, Polish, Turkish, Portuguese, Brazilian Portuguese, Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese (Taiwan), Latin American Spanish
Power Supply Output	Max. 12 VDC, 1 A
<b>Indoor station</b>	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711u、 G.711a、 Opus、 AAC-LD、 AAC-LC、 G.726、 G.722.1
Audio compression bitrate	16~64Kps
<b>Indoor station</b>	
Wired network	1 RJ-45, 10/100 Mbps self-adaptive
Wireless network	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Network protocol	TCP/IP, SIP, RTSP
<b>Indoor station</b>	
RS-485	1 RS-485 (Half duplex)
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Support TF card, up to 128 G
<b>Indoor station</b>	
Power consumption	≤ 5 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	12 VDC, 1 A,IEEE802.3af, Standard PoE
Working humidity	10% to 90% (no-condensing)
Dimension (L x W x H)	174.99 mm × 113.49 mm × 21 mm (6.89" × 4.47" × 0.83")

▪ Dimension

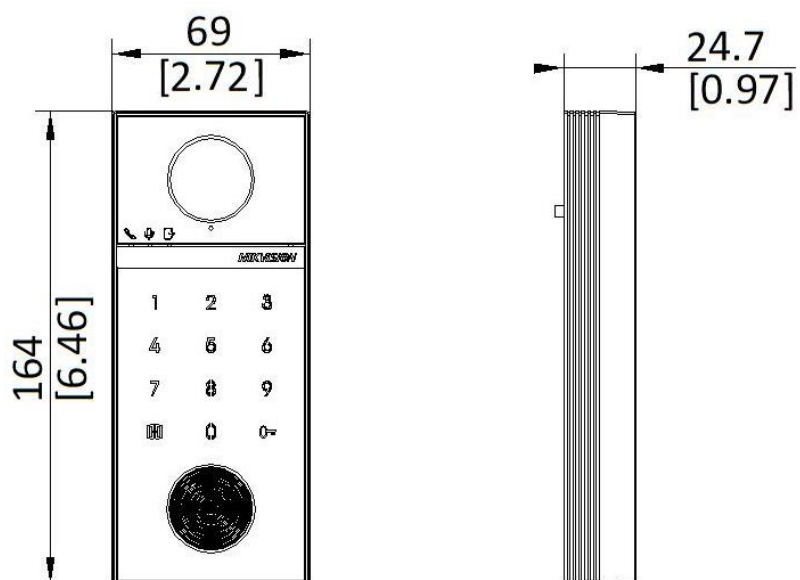

Unit: mm [inch]

SCALE	1:1
-------	-----

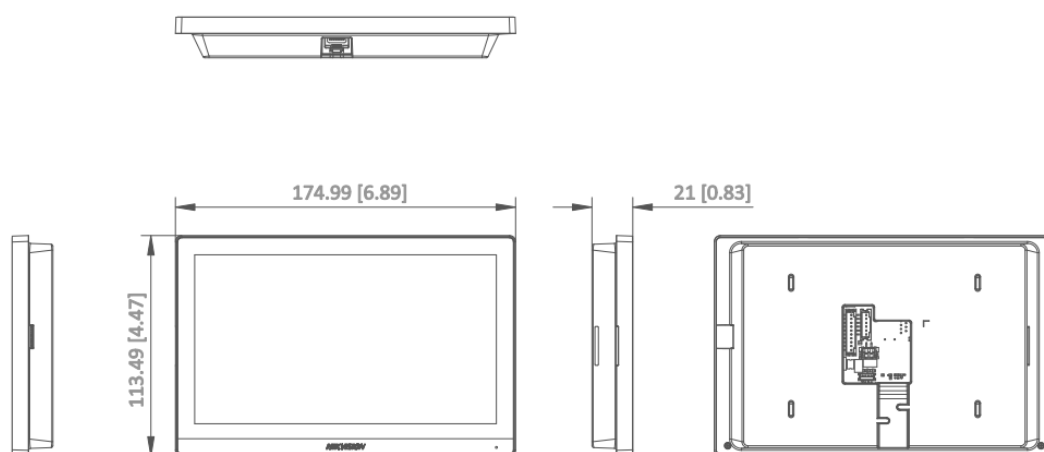





Unit:mm [inch]

SCALE 1:1

▪ Accessory

▪ Optional

DS-KABV6114-G	DS-KABH6350-T	DS-KABV24-A	DS-KABV6114-RS
			

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

