

**DS-QAZ0610G1/EN**  
**Analog Frameless Ceiling Speaker 10W EN54**




- 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Rated Power: 100V: 10W/5W/2.5W, 70V : 10W/5W/2.5W/1.25W
- Sensitivity(1 m, 1 W): 89 dB
- Max. SPL: 98 dB
- Frequency Response: 120 Hz to 20 kHz
- White or black appearance optional
- EN 54-24 certified

## ▪ Specification

| Speaker                         |                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------|
| Impedance                       | 8Ω                                                                                       |
| Rated Power                     | 10W                                                                                      |
| Total Harmonic Distortion (THD) | ≤1%                                                                                      |
| Sensitivity(1 m, 1 W)           | 89dB                                                                                     |
| Max. Acoustic Pressure          | 98dB                                                                                     |
| Frequency Response              | 120Hz~20kHz(-10dB)                                                                       |
| Speaker Unit                    | 1 × 1.0-inch tweeter and 1 × 6.5-inch woofer                                             |
| Coverage Angle                  | Conical Coverage: 88°                                                                    |
| Interface                       |                                                                                          |
| Audio In                        | Constant voltage input: 100 V/Constant voltage input: 70 V/Constant impedance input: 8 Ω |
| Voltage Input                   | 100V: 10W、 5W、 2.5W<br>70V : 10W、 5W、 2.5W、 1.25W<br>8Ω                                  |
| General                         |                                                                                          |
| Material                        | Main body: PC<br>Base: ABS                                                               |
| Mounting Hole Dimension         | Ø225 mm (8.86")                                                                          |
| Language                        | 5 languages: English, French, Spanish, German, Italian                                   |
| Package Dimension               | 305 mm × 305 mm × 315 mm (12.01" × 12.01" × 12.4")                                       |
| With Package Weight             | Approx. 2.9 kg (6.49 lb.)                                                                |
| Packing List                    | Device × 1<br>Regulatory Compliance and Safety Information × 1                           |
| Operating Temperature           | -10 °C to 45 °C                                                                          |
| Operating Humidity              | < 90% (No condensation)                                                                  |
| Mounting Depth                  | 240 mm (9.45")                                                                           |

## ▪ Dimension

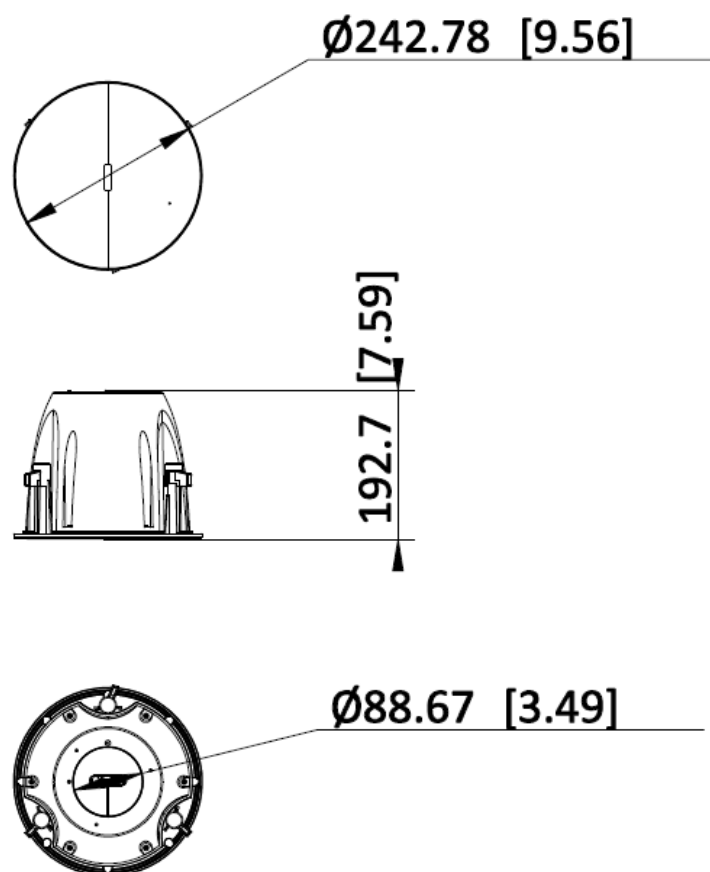

Unit: mm [inch]

SCALE

1:1

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

