

DS-3WF20KS-S-5ACG **5Ghz 867Mbps 20KM Wireless Bridge**



The wireless bridge can be applied in industries, such as wireless video security, railway, transportation, power and other industries, wireless video/data transmission, wireless coverage, carrier wireless backbone network construction, Wi-Fi wireless coverage, rural information construction, and wireless network coverage. The long-distance transmission of the device can guarantee multi-channel HD video transmission.


- Up to 20 km wireless transmission distance
- 867 Mbps 802.11ac wireless bridge
- TDMA supported
- Standard PoE Input

▪ Specification

General	
Product Dimensions (W × H × D)	Diameter: 372.2 mm(14.65") Thickness: 241.02 mm(9.45")
Package Dimensions (W × H × D)	448 mm × 418 mm × 420 mm (17.64" × 16.46" × 16.54")
Net Weight	0.9 kg (1.98 lb)
Gross Weight	2.1 kg (4.63 lb)
Packing List	Wireless Bridge × 1, Power Supply Adaptor × 1, Power Cord × 1, RJ45 Cover × 1, Adjustable mounting bracket component × 1, Hoop × 1, Antenna reflector plate × 1, Quick Start Guide × 1, Regulatory Compliance and Safety Information × 1
Packing Method	Single unit packing
Working Temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working Humidity	5% to 95% (no condensation)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Storage Humidity	5% to 95% (no condensation)
Installation Mode	Pole Mounting
Ingress Protection	IP55
Power Consumption	6 W for typical (1-ch 2MP IPC), Max. 8 W
Wireless Parameter	
Max. Transmission Rate of Air Interface	≤ 867 Mbps
Wireless Standard	IEEE 802.11/a/n/ac
Working Frequency Band	5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz
Antenna Gain	23 dBi
Antenna Angle	(H) Beamwidth [3 dB] 10° (V) Beamwidth [3 dB] 10°
Transmitting Power	27 dBm @11ac MCS0 (Note: Transmitting power may vary with local regulations.)
Receiving Sensitivity	-85±2dBm@AC80-MCS0, -60±2 dBm@AC80-MCS9
Throughput Rate	PTP: ,230 Mbps/20 KM(AC80),250 Mbps/15 KM(AC80),300 Mbps/10 KM(AC80),350 Mbps/5 KM(AC80)
Hardware Parameter	
Network Interface	1 × 1000 Mbps RJ45 ports
LED Indicator	Signal intensity indicator
Reset	Hardware resetting button
Power Supply	48V 0.25A PoE or PoE(802.3af) 36 ~ 57V 0.2A
Software Function	
Application Function	TDMA, DFS
Channel Width	20/40/80 MHz
Channel Selection	Auto/manual selection
Security Mode	WPA2-PSK
Security Mechanism	Wireless network name hidden
Network Protocol	NTP (network time synchronization), SADP (auto search for IP address), HTTPS/HTTP (web management), SSH (debugging)
Management Method	Web
System Log	Syslog


Upgrade	Web
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7: 2020), RCM (AS/NZS CISPR 32: 2015)
Safety	UL (UL 60950-1), CB (AMD1: 2009, AMD2: 2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No. 1907/2006)
Radio	EN 301 893, EN 300 440, EN 62311, EN 301 489-3, EN 301 489-17, FCC Part 15.247

▪ Typical Application

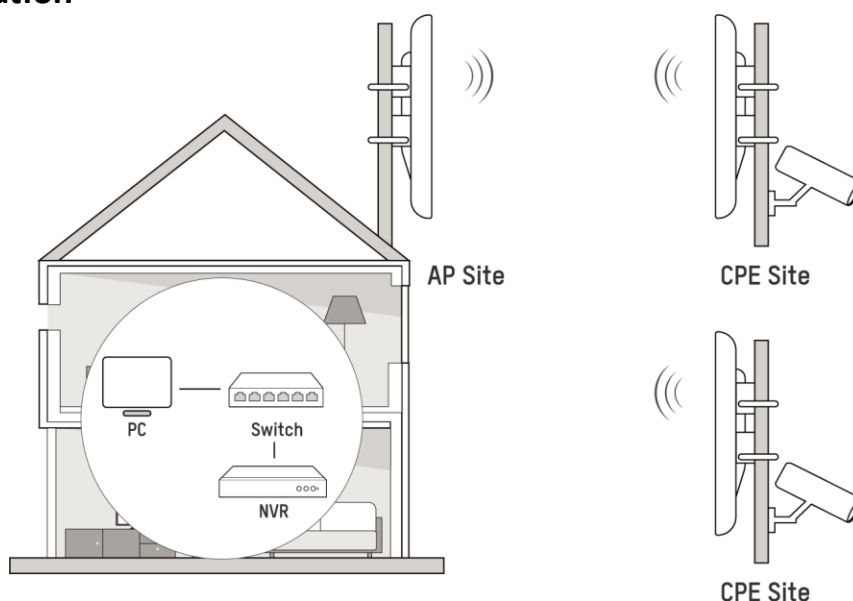


▪ Physical Interface

Interface/Button	Description
POE	Connect to the "POE" port on the POE power supply via a network cable to provide power and data transmission for the device.
Reset	Press and hold the reset button for more than 10 seconds to fully restore the factory default settings.

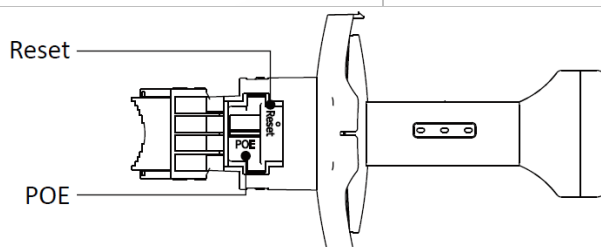

▪ Dimension

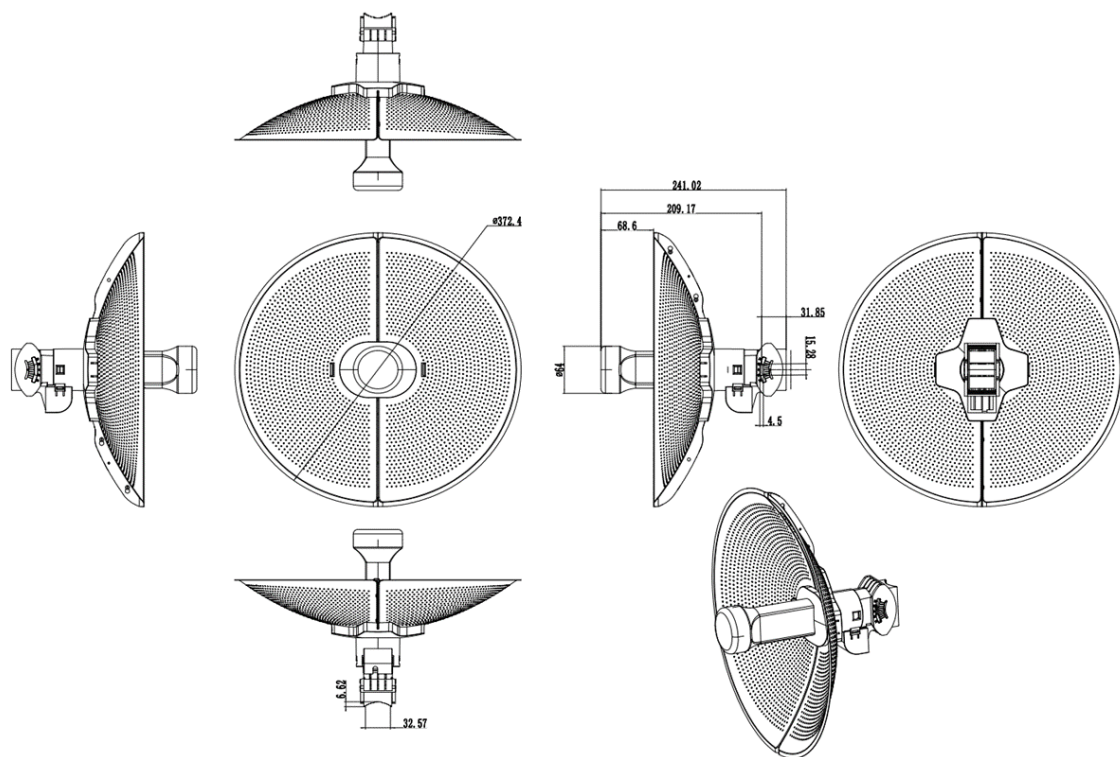

See Far, Go Further



www.hikvision.com
support@hikvision.com

