

DS-K3G225LX
Value Tripod Turnstile

By adopting the turnstile integrated with the 3rd access control system, person should authenticate to pass through the lane via presenting cards, face, or QR code, etc. It is widely used in attractions, office, construction sites, residences, etc.

- Bidirectional (Entering/Exiting) lane.
- Supports I/O connection for 3rd access system integration.
- For "Pa" type, the face recognition terminal need purchase separately.
- Fire alarm passing: When triggered, the arms will be dropped automatically for emergency evacuation.
- High-brightness LED indicates the entrance/exit and passing status.

▪ Specification

System	
Motor	NA
MCBF	≥ 2 million times
Interface	
Exit button	2
Fire alarm input	1
Hardware	
Access controller	Not supplied
Function	
Keyfob	Not support
General	
Throughput	25 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	SUS304 stainless pipe
Pedestal material	SUS304 stainless steel 1.0 mm (mostly)
Indicator	Lane status indicator except Pa models.
Power consumption	Standby: 25 W Working: 35 W Peak: 45 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	Without package: 1200 mm × 233 mm × 1000 mm (47.2" × 9.2" × 39.4") With package: 1350 mm × 410 mm × 1120 mm (53.1" × 16.1" × 44.1")
Weight	Net: 30.58 kg (67.41 lb); Gross: 37.8 kg (83.33 lb)
Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 240 VAC~, 50/60 Hz, 1A-0.5A
Door open duration	5 to 60 sec
Power supply for face recognition module	Support


▪ Note

The main element of the turnstile is stainless steel, which is rust less (antioxidant) and corrosion resistant (The anti-corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically.

The instructions and tips for maintaining the turnstile are as follows:

1. Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seaside and chemical plants.
2. Keep the device surface clean and dry.
3. Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
4. Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
5. Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggested to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).


▪ **Dimension**

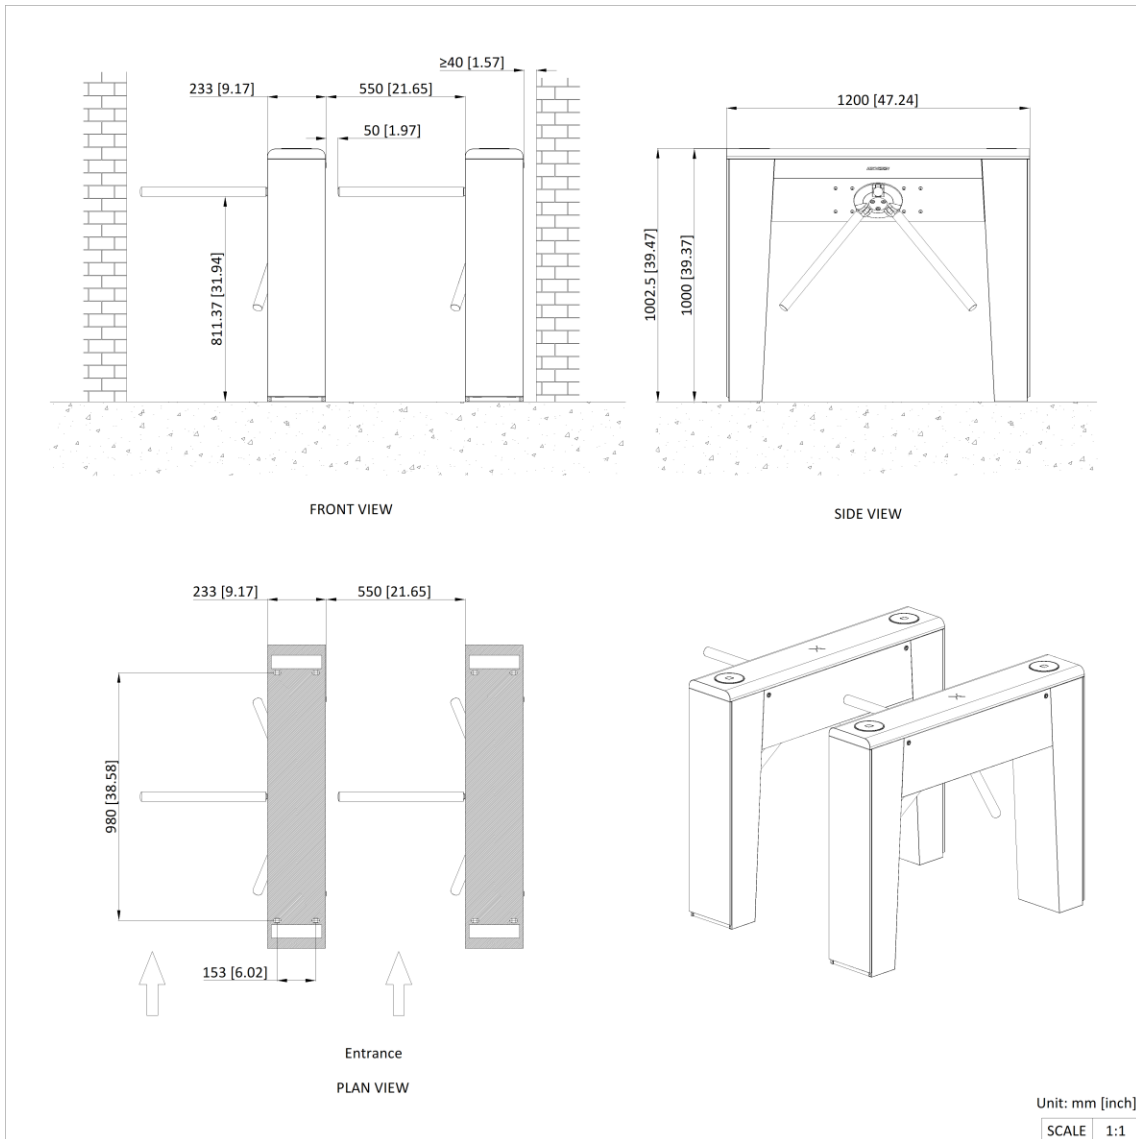

▪ **Accessory**

▪ **Included**

DS-KSB02-Pa




▪ **Optional**

DS-K3G225X-S

DS-KSM01/G225

DS-KEB30-AC

DS-K7CR01

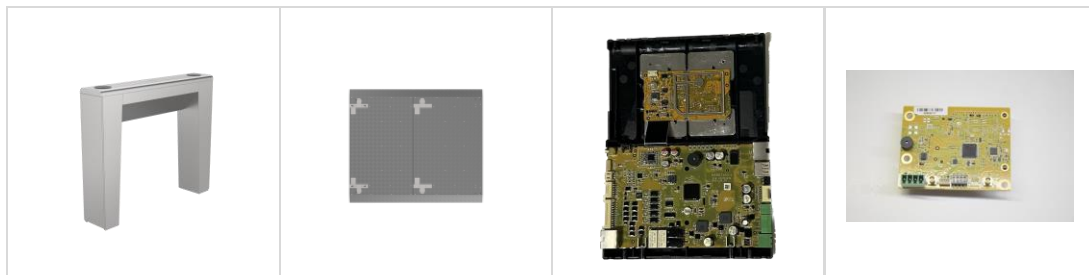

See Far, Go Further



www.hikvision.com
support@hikvision.com

