

DS-QAE0120G1E-V
Analog Cabinet Speaker 20W



- 4" Full frequency × 1; tweeter; analog cabinet speaker
- 100V, rated power: 10W/20W
- Sensitivity(1 m, 1 W): 92 dB ± 3 dB
- Max. SPL: 108 dB
- Frequency Response: 80 Hz to 20 kHz


▪ Specification

Speaker	
Impedance	8 Ω
Speaker Unit	4" Full frequency $\times$ 1; tweeter
Rated Power	100V: 10W/20W
Sensitivity(1 m, 1 W)	92 $\pm$ 3dB
Maximum Sound Pressure Level	108dB
Frequency Response	80Hz to 20kHz
Interface	
Audio In	Rated voltage , 100 V
General	
Material	Metal and plastic
Dimension	172mm X 260mm X 113mm
Package Dimension	176mmx116mmx269mm
Weight	Approx.1385g
With Package Weight	Approx.1535g
Packing List	Device $\times$ 1 Quick Start Guidex1
Operating Temperature	-10 $^{\circ}$ C to 50 $^{\circ}$ C(14 $^{\circ}$ F to 122 $^{\circ}$ F)
Operating Humidity	< 90% (No condensation)

▪ Available Model

DS-QAE0120G1E-V

▪ Dimension

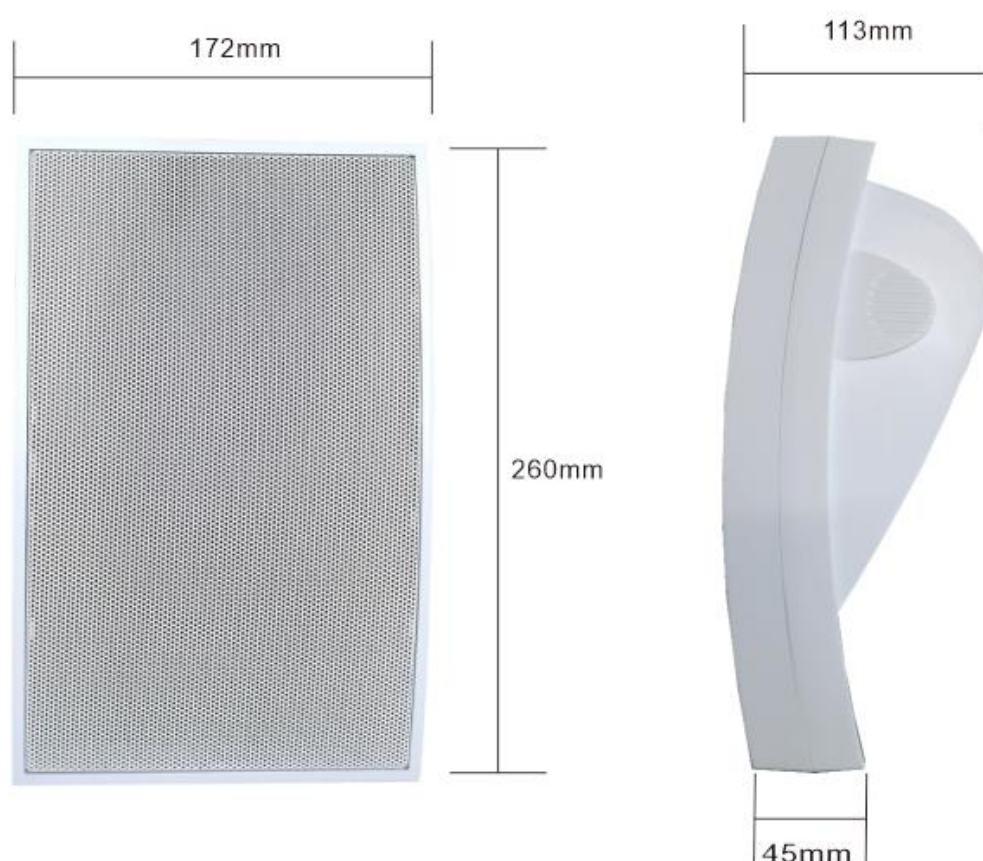



See Far, Go Further



www.hikvision.com
support@hikvision.com

