


Installation Notes


1 Installation of Bracket and Device

Step 1 Pre-Installation: Stick the mounting template on the installaion position.


*Note: For soft base wall, no expansion sleeves required. For hard base wall, drill holes with a 5.5 mm diameter drill bit.

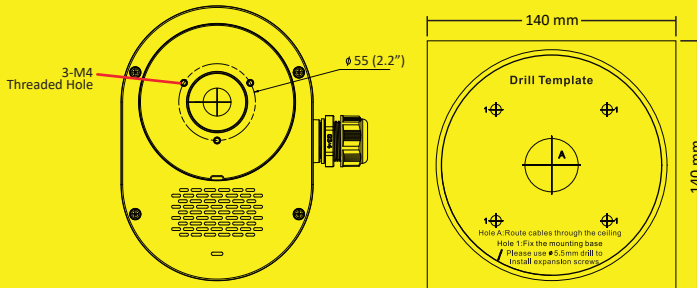


Step 2 Open the cable box, and secure the device to the front cover by using 3 PM4×12 screws (supplied).

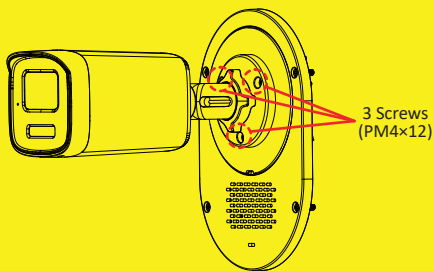


Step 3 Insert 4 silicone rings from the accessory kit into the base of 4 PA4×25 screws, and use the screws to secure the rear cover of the cable box to the wall.

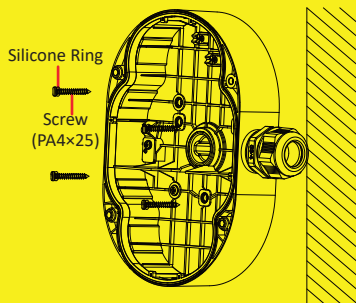


Step 4 Hang the safety rope on the rear cover, connect the loudspeaker interface, power interface, and video interface. Then secure the upper and lower covers of the cable box by 4 PM4×13L5 screws.

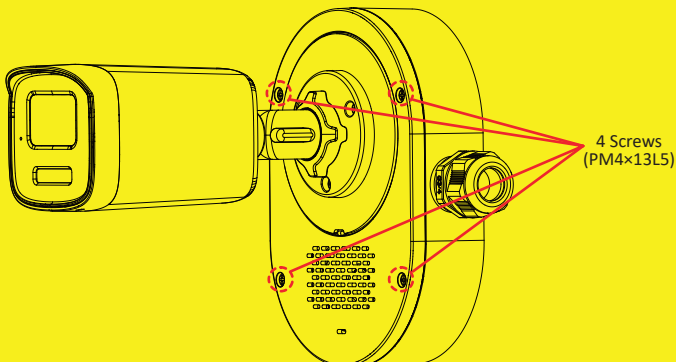

Step 5 Loosen the adjustment screws and knobs to adjust the camera position; once correctly positioned, tighten the adjustment screws and knobs.

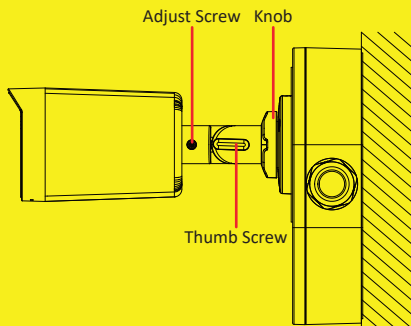


***Note:** Angle adjustment.

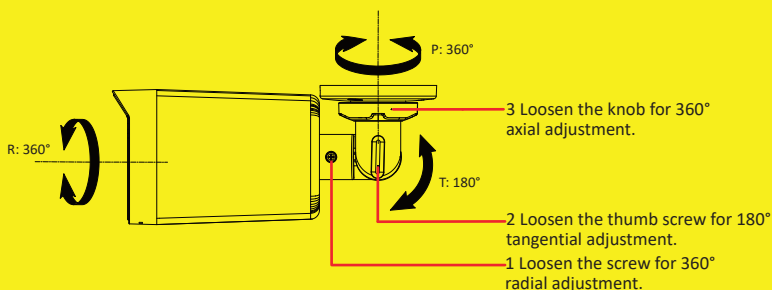

2 Waterproof of Cable Connectors

Being exposed to air for a long time may lead to rust, short circuit and other serious malfunctions. Make sure waterproof treatment of cable connectors.



Wrap the waterproof tape (self-prepared) around the cable connector tightly as the figure above. Make sure that all naked wires are all firmly wrapped in the waterproof tape.