

DS-KER02X
QR Code Scanner

Available for QR code scanner installed on the speed gates and turnstiles.

- Wide-angle design is suitable for all kinds of mobile phone code scanning, with fixed holes, easy to integrate with other devices.
- With internally RS485 protocol ensure total security solutions.
- Suitable for turnstile with the latest firmware versions.
- With built-in card reader function to read Desfire card and M1 card.

▪ Specification


Interface	
RS-485	1
Authentication	
QR code	Support
Card	DESfire card
Card reading frequency	13.56 MHz
Card reading distance	0 to 3 cm
Card reading duration	< 1 sec
Function	
M1 card encryption	Support
General	
Indicator	Not support
Power consumption	Standby: 2.5 W Working: 3.5 W Peak: 4 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	10% to 95% (No condensing)
Protective level	IP67
Dimensions	75.28 mm × 66.28 mm × 43.5 mm (2.96" × 2.61" × 1.71")
Weight	0.2 kg (0.44 lbs)
Approval	CE/CB/RoHS/REACH/WEEE/RCM/IC/anatel/BIS/MIC/UKCA
Power supply method	12V 0.3A
Buzzer	Support
Configuration	
Module selection	NO

▪ Available Model

DS-KER02X-DQ-485/Modular

DS-KER02X-Q-485/Modular

▪ Dimension

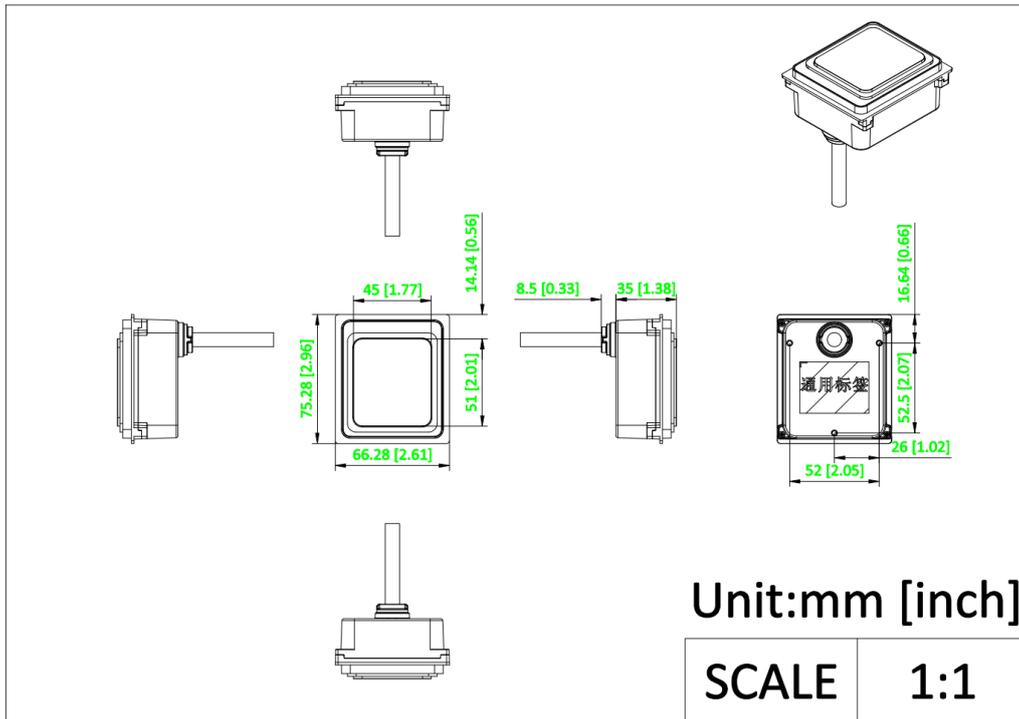

See Far, Go Further



www.hikvision.com
support@hikvision.com

