

DS-3WG1510P-EI

All in One 10 Port Router



DS-3WG1510P-EI is a high-performance enterprise-grade router launched by HIKVISION for small and medium-sized enterprises. It uses high-performance dual-core processors and advanced software architecture, providing higher capacity and VPN service performance and a new business experience. The product is mainly applicable to SMEs, governments, schools, hospitals, and other scenarios requiring high-speed Internet access.

Note: For optimal performance, EI Series APs should be used in conjunction with EI Series smart managed routers (AC) only, and vice versa.

- 8 Gigabit PoE LAN Ports with 2 LAN/WAN Switchable
- 2 Gigabit WAN Ports with 1 WAN/LAN Switchable
- Max. 1000 Mbps Throughput
- Total PoE Power Budget 80W
- Integrated AP Controller
- Support Multiple VPNs Including IPsec, L2TP, PPTP, OpenVPN
- Support Powerful Security Features Including Firewall Policies, DDoS Defending, IP/MAC/URL Filtering, ARP Defending, etc.
- Support Behavior Management
- Compact Size for Flexible Deployment

▪ Specification


General	
Shell	Metal
Net Weight	0.60 kg (1.32 lb)
Gross Weight	1.18 kg (2.60 lb)
Working Temperature	0°C to 40°C (32°F to 104°F)
Working Humidity	10% to 90% (no condensation)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Storage Humidity	5% to 95% (no condensation)
Product Dimensions (W × H × D)	206 mm × 28 mm × 110 mm (8.11" × 1.1" × 4.33")
Packing List	Smart Managed Router × 1, Power Adapter × 1, Power Cord × 1, Ground Wire × 1, Foot Pad × 4, Quick Start Guide × 1, Regulatory Compliance and Safety Information × 1
Power Supply Method	DC 54 V, 1.6 A
Power Consumption	86 W
Hardware Specifications	
Ports	8 × Gigabit PoE port, 2 × Gigabit RJ45 port
Number of Fixed WAN Ports	1
Number of Fixed LAN Ports	6
Number of LAN/WAN Switchable Ports	3
PoE Ports	8
PoE Max. Output Power	80 W
PoE Standard	IEEE 802.3af, IEEE 802.3at
Max. PoE Power per Port	30 W
Software Specifications	
Recommended Client Capacity (Gateway Mode)	100
Recommended Uplink Bandwidth (Gateway Mode)	1000 Mbps
Networking Method	Gateway mode, AC mode
Managed AP Capacity	Gateway mode: 8 ; AC mode: 32 ;
Internet Access Mode	DHCP, PPPoE, Static
VLAN ID Range	1~4000
Max. Number of DHCP Address Assignments	1000
Max Static DNS Entries	128
Max Custom DNS Servers	128
Max Static Routes	128
Max Policy-Based Routes	32
Max. Number of Authenticated Clients Displayed	400
IPsec VPN Client Bandwidth (Up/Down)	90 Mbps

L2TP VPN Client Bandwidth (Up/Down)	160 Mbps
PPTP VPN Client Bandwidth (Up/Down)	260 Mbps
OpenVPN Client Bandwidth (Up/Down)	20 Mbps
Max Port Forwarding Rules	256
NAT Session Table Size	20000
Software Features	
Wireless Management	- Support wireless configuration ; - Support RF configuration ; - Support health mode ; - Support Guest SSID ; - Support wireless roaming ; - Support wireless optimization ; - Support wireless SSID speed limiting ; - Support wireless RF speed limiting ; - Support wireless smart speed limiting ; - Support wireless client speed limiting ; - Support weak-signal access control ; - Support weak-signal kicking offline ; - Support roaming sensitivity adjustment ; - Support wireless access control ; - Support wireless client association ; - Support AP load balancing ;
WAN	- Support DHCP/static/PPPoE internet access methods; - Support WAN VLAN configuration; - Support WAN NAT configuration; - Support WAN MTU configuration; - Support multi-WAN; - Support both load balancing and active/standby load modes; - Support connection-based load balancing policy; - Support source IP-based load balancing policy; - Support policy routing for specific line forwarding ;
LAN	- Support port-based VLAN assignment; - Support MAC address learning; - Support DHCP address allocation; - Support DHCP address binding; - Support VLAN isolation ;

ACL	Support IPv4-based access control; Support IPv6-based access control; Support MAC-based access control ;
Security	Support ARP protection; Support MAC filtering; Support connection limit; Support port mapping; Support attack prevention; Support security zone ;
Behavior Management	Support IP and time-based application control; Support website filtering; Support egress flow control; Support VPN flow control policy; Support PPPoE flow control policy; Support custom flow control policy; Support parental control ;
Portal Authentication	Support account authentication; Support one-click authentication; Support certificate authentication; Support Facebook authentication;
Local Authentication	Support account authentication; Support authorization authentication; Support QR code authentication ;
Third-party Server Authentication	Support CMCC2.0 Portal; Support RADIUS service;
Routing	Support IPv4/IPv6 static routing; Support IPv4/IPv6 policy routing ;
IP Services	Support Oray Dynamic DNS; Support No-IP Dynamic DNS; Support 3322.org Dynamic DNS; Support Cloudflare Dynamic DNS; Support Alibaba Cloud Dynamic DNS; Support ComExe Dynamic DNS; Support Dyn Dynamic DNS; Support UPnP; Support PPPoE server; Support DNS policy ;

VPN	Support IPsec VPN client ; Support IPsec VPN server ; Support L2TP VPN client ; Support L2TP VPN server ; Support PPTP VPN client ; Support PPTP VPN server ; Support OpenVPN client ; Support OpenVPN server ;
Service and Support	Support NAT traversal service ; Support audit logs ; Support fault diagnosis ; Support fault alarms ; Support one-click fault collection ; Support whole network IP conflict detection ; Support network diagnostic tools ; Support SSH ; Support cloud service diagnosis ; Support port mirroring ; Support local upgrade ; Support online upgrade ; Support cloud services ; Support APP management ; Support port static aggregation ; Support CAPWAP DTLS encryption ;
Approval	
EMC	CE-EMC (EN 55032:2015+A11: 2020+A1: 2020 EN IEC 61000-3-2:2019+A1: 2021+A2: 2024 EN 61000-3-3:2013+A1: 2019+A2: 2021 EN 55035:2017+A11: 2020)
Safety	CB (IEC 62368-1: 2018), CE-LVD (EN IEC 62368-1: 2020+A11: 2020)
Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

▪ Dimension

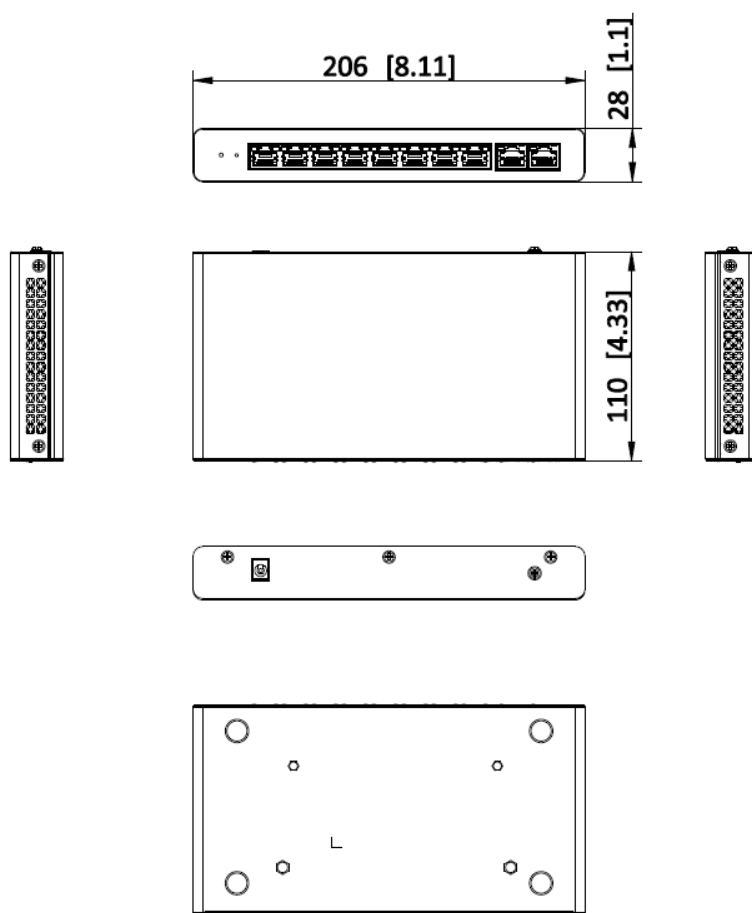

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

