

**DS-QAPS4R20E-4N**  
**4 × 4" Network Column Speaker Eco**



- 200 W rated power
- Driver : 4-inch woofers × 4, 0.75-inch tweeters × 12
- Sensitivity(1 m, 1 W): 90 dB
- Frequency response: 80Hz~20KHz ( ±10dB ) , 108Hz~20KHz ( ±3dB ) ,
- Coverage angle: horizontal dispersion angle:130°, vertical radiation angle: up 15° , down 15°
- Maximum sound pressure level: 113 dB @1 m

## ▪ Specification

Speaker	
Rated Power	200 W
Total Harmonic Distortion (THD)	≤1%
Sensitivity(1 m, 1 W)	90 dB
Max. Acoustic Pressure	113 dB @1m
Frequency Response	±10dB : 80Hz~20KHz ±3dB : 108Hz~20KHz
Speaker Unit	4-inch woofers × 4, 0.75-inch tweeters × 12
Coverage Angle	Horizontal dispersion angle: 130° ; vertical radiation angle : up 15°,down 15°
Crossover Type	Electronic Crossover
Function	
Audio Algorithm	VOLUME、 DELAY、 MIX、 HPF、 LPF、 PEQ、 COMP、 PP、 FD、 NOISEGATE
Network	
Network Protocol	AES67 , TCP/IP , ICMP , HTTP , HTTPS , DNS , RTP , RTSP , RTCP , NTP , QoS , UDP , SSL/TLS , IEEE1588
Interface Protocol (API)	OTAP
Network Security	Password protection, complex passwords, HTTPS encryption, HTTP/HTTPS authentication, security audit logs, TLS 1.2/1.3
Data Security	Secure Boot
Interface	
Indicator	Power status indicator × 1 Line In input status indicator × 1
Network Interface	2 × RJ45 100 Mbps Ethernet ports
Audio In	Network input 3-pin Phoenix terminal (Line in input) × 1
Audio Out	3-pin Phoenix terminal (Line in output) × 1
Reset	support
General	
Power	AC 110-240V~50/60Hz 1.5A
Dimension	130mm × 208.5mm × 475.9mm
Weight	6.35kg
Material	Birch
Packing List	Complete unit × 1 AC power cord × 1 QSG × 1 Installation screw pack × 1 Wall-mount bracket × 1
Operating Condition	-10°C to 50°C
Package Dimension	693mm × 245mm × 320mm
With Package Weight	8.85kg
Color	Black


Installation

Wall Mount

▪ **Available Model**

DS-QAPS4R20E-4N/BLACK

▪ **Dimension**

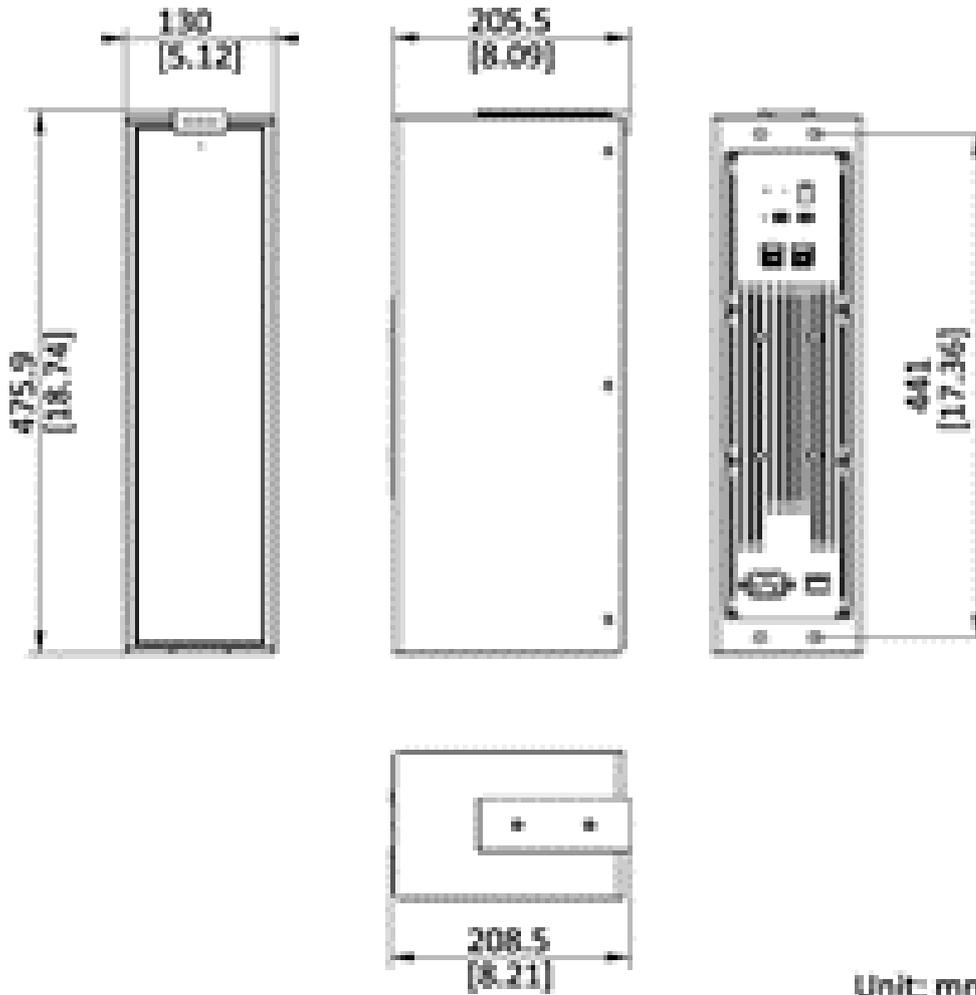

Unit: mm (inch)

SCALE 1:1

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

