


DS-D4225CE-1AP/M
DS-D4225CE-1AP/M




- Spare module for DS-D4225CEXX-1AP

▪ Specification

Product Type	
Product Type	Spare LED Module
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.5
Pixel Pitch	2.5 mm
Resolution	100 × 100
Pixel Density	160000 dots/m ²
Maintenance Method	Front and Rear maintenance
Lamp Board Housing	With housing
Display	
White Balance Brightness	4500 nit (Factory preset brightness) 5000 nit (Peak)
Color Temperature	9300K adjustable
Viewing Angle	Horizontal 160°, vertical 160°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Key Material	
Lamp Encapsulation	1415
Control System	Hikvision
Working Environment	
Working Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Working Humidity	10% RH to 90% RH
Storage Humidity	10% RH to 95% RH
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F)
General	
Package Dimension (W × H × D)	314 (W) mm × 55 (H) mm × 328 (D) mm (12.36" × 2.17" × 12.91")
Gross Weight	0.95 kg/1 in 1 (2.09 lb.)

▪ Dimension

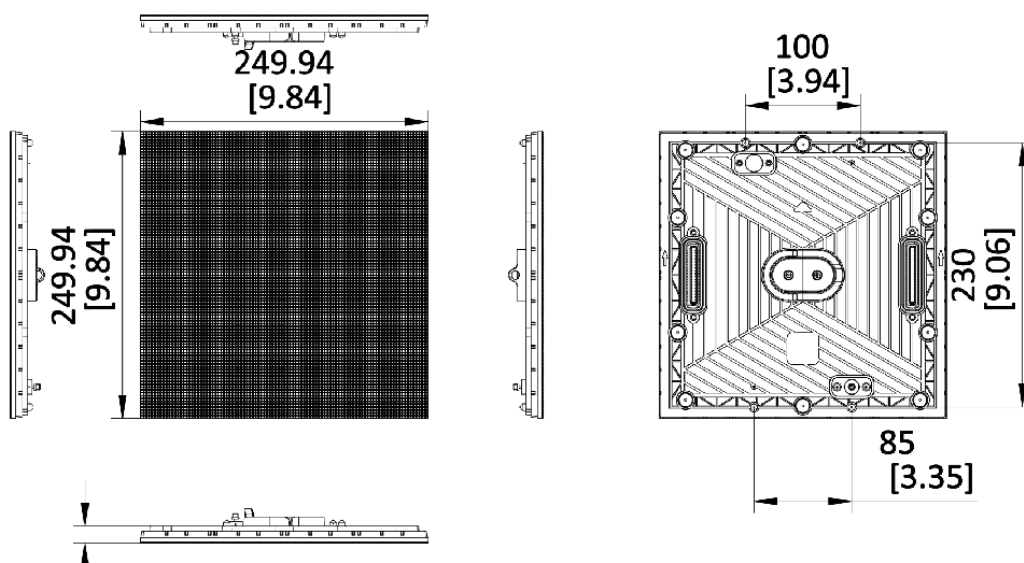

▪ Accessory

▪ Optional

DS-D4225CE22-1AP	DS-D42MF2D
	

See Far, Go Further



www.hikvision.com
support@hikvision.com

