
DS-D4229CE-1AP/M

DS-D4229CE-1AP/M




- Spare module for DS-D4229CEXX-1AP

▪ Specification

Product Type	
Product Type	Spare Modules Package
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.9
Pixel Pitch	2.9762 mm
Resolution	84 × 84
Pixel Density	112896 dots/m²
Lamp Board Housing	With housing
Maintenance Method	Front and Rear maintenance
Display	
White Balance Brightness	4500 nit (Factory preset brightness) 5000 nit (Peak)
Color Temperature	9300K adjustable
Viewing Angle	Horizontal 160°, vertical 160°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Key Material	
Lamp Encapsulation	1415
Control System	Hikvision
Working Environment	
Working Temperature	-40 ℃ to 60 ℃ (-40 ℉ to 140 ℉)
Working Humidity	10% RH to 90% RH
Storage Humidity	10% RH to 95% RH
Storage Temperature	-40 ℃ to 70 ℃ (-40 ℉ to 158 ℉)
General	
Gross Weight	0.95 kg/1 in 1 (2.09 lb.)
Package Dimension (W × H × D)	314 (W) mm × 55 (H) mm × 328 (D) mm (12.36'' × 2.17'' × 12.91'')

▪ Dimension

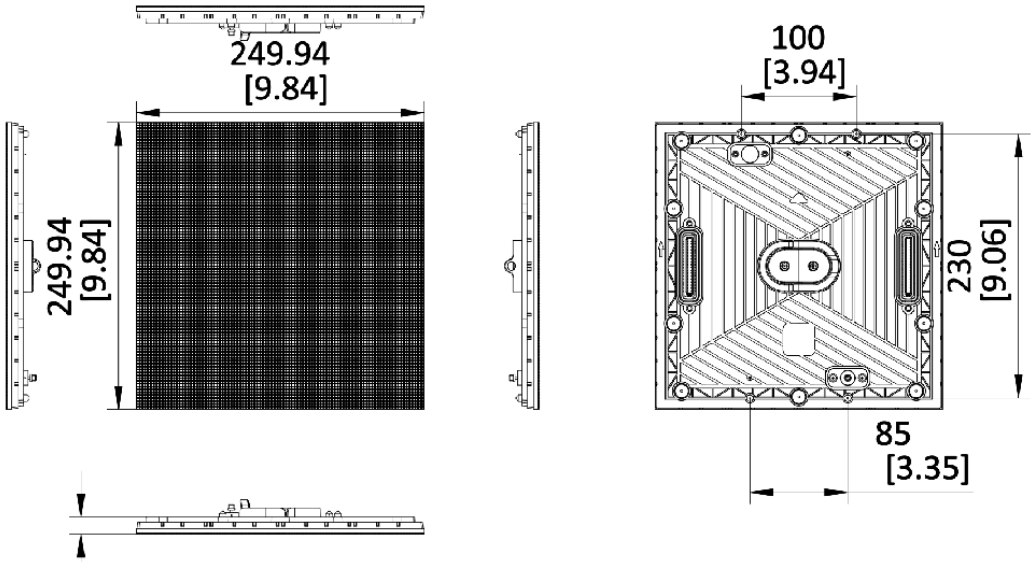

▪ Accessory

▪ Optional

DS-D42MF2D	DS-D4229CE22-1AP	DS-D4229CE24-1AP
		

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®