

DS-UPS600-R#UK
600VA/360W, Backup UPS with built-in battery



- Built-in AVR
- Auto restart while AC is recovering
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection



▪ Specification

Power	
UPS Capacity	600 VA / 360 W
Input	
Input Voltage Range	162 VAC to 268 VAC (220V)
	170 VAC to 280 VAC (230V)
	177 VAC to 290 VAC (240V)
Input Frequency	50/60 Hz self-adaptive
Plug Type	UK TYPE G
Output	
Output Voltage Range	220/230VAC $\pm$ 10%
Output Frequency	50/60 Hz $\pm$ 0.5 Hz self-adaptive
Transfer Time	$\leq$ 10 ms
Waveform	Simulated Sinewave
Outlet Type	UK TYPE G
Outlet Number	2
Battery	
Battery Type	12 V / 7 Ah x 1, lead-acid battery
Recharge Time	4-6 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 15-20 min
Interface	
Communicate Ports	No
Protection	
Full Protection	Surge protection,Overload protection,Discharge protection,Overcharge protection
Indicator	
Display	LED indicator
	Line mode: Solid green led lighting
	Battery mode: Solid yellow led flash
	Fault mode: Solid red led lighting
Alarm	Battery mode: Sounding every 10 seconds.
	Low battery : Sounding every second.
	Over load : Sounding every 0.5 seconds.
	Fault: Continuously sounding.
General	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	0% to 90% (non-condensing)
Dimension	276.1 mm $\times$ 101 mm $\times$ 142 mm (10.9" $\times$ 3.98" $\times$ 5.59")
Weight	Approx. 4.25 kg (9.37 lb)

▪ Available Model

DS-UPS600-R/UK(HWDZ)

▪ Dimension

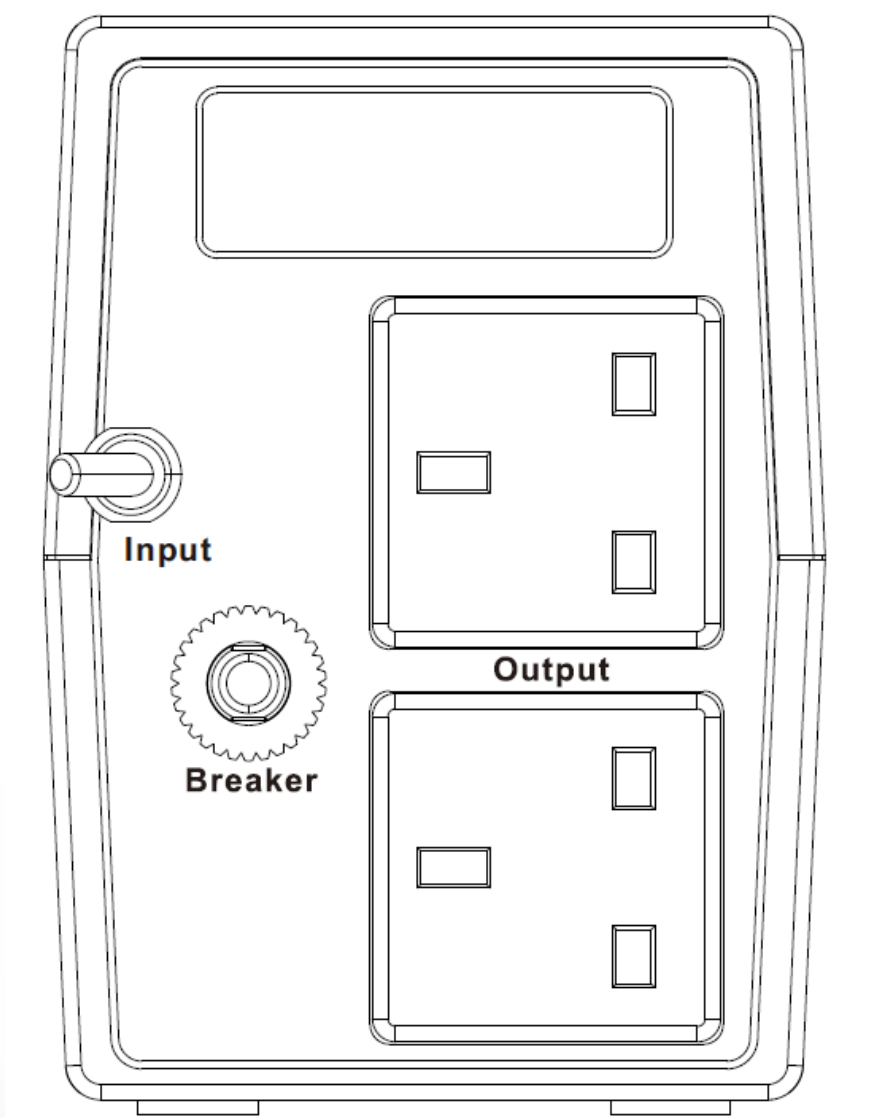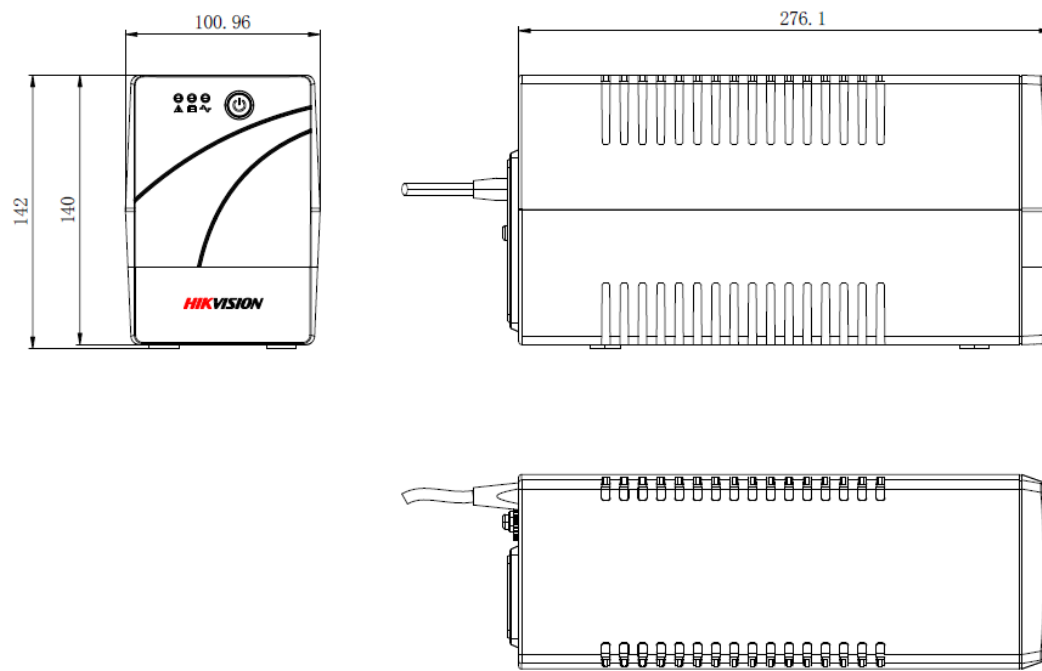

See Far, Go Further



www.hikvision.com
support@hikvision.com

