

DS-KAD7042EY 2-wire HD mini ground distributor



- Excellent Product Design: 5 interface indicators show device status, 1 Reset button
- Excellent Product Design: DIN rail installation
- IN/ OUT: Support DS-KAD7042EY cascade, or connection to DS-KAD7060EY-S for network communication between multiple buildings
- Support access to door stations, indoor stations and KAD7061 or KAD7062 simultaneous transmission of power and network signals on 2 wires




▪ Specification

Device interfaces	
Two-wire interface	5("IN""OUT" for cascading, CH1-CH3 for Door station and Indoor station)
Power indicator	1
Signal indicator	5
Reset	1
Power supply input	48VDC
General	
Power supply	48 VDC
Installation	DIN rail installation
Power consumption	CH1+CH2+CH3 < 110 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × H × D)	71.84 mm × 90 mm × 65.95 mm (2.8" × 3.5" × 2.6")

▪ Available Model

DS-KAD7042EY

▪ Dimension

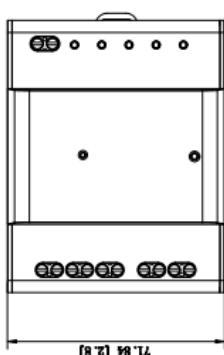

Unit:mm[inch]

SCALE	1:1
-------	-----

-

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®