DS-QAC0660G1-6RO
6.5" Analog Ceiling Speaker

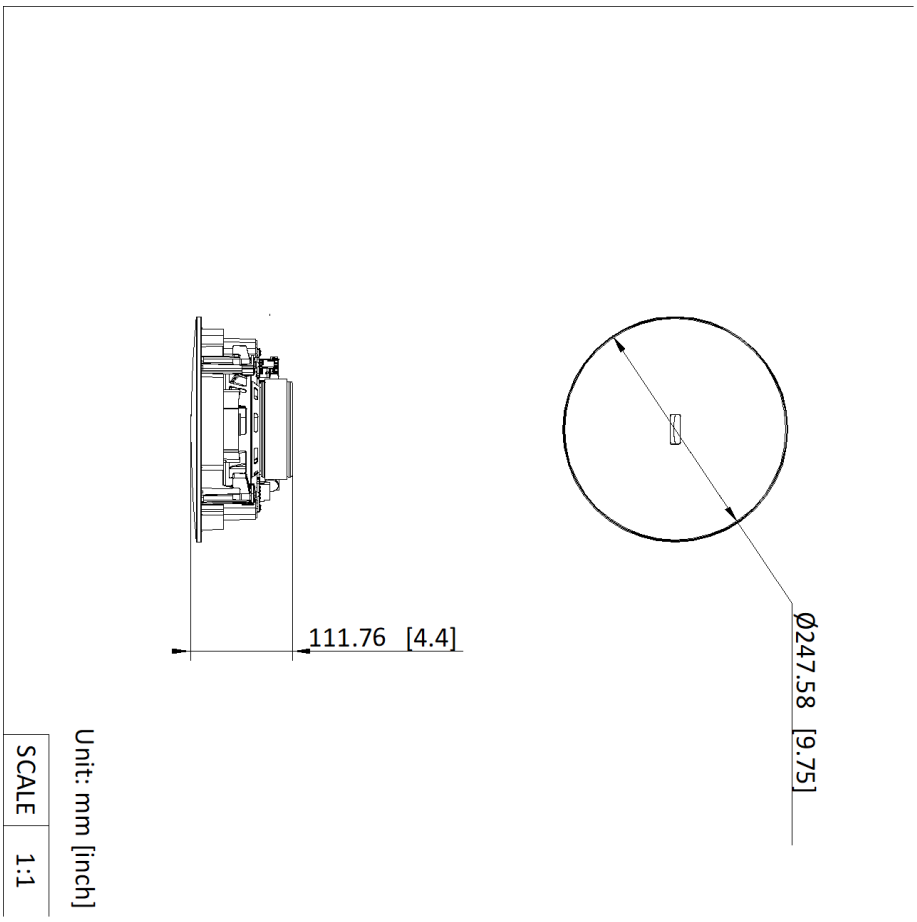


- Rated power: 60W
- Sensitivity(1m,1W)：89dB
- Max SPL：107dB(Rated Power)
- Frequency Response：60Hz~20kHz(-10dB)
- Speaker unit：1 × 1.0-inch tweeter and 1 × 6.5-inch woofer
- Power：Input impedance: 8Ω/60W
- Power： Input impedance: 8Ω/60W;Constant voltage 100V/30W;Constant voltage 70V/30W
- Color：Black and white optional

▪ Specification

Speaker	
Impedance	8Ω
Speaker Unit	Woofer: 1×6.5" Tweeter: 1×1.0"
Audio	
Rated Power	60W
Sensitivity	89dB
Maximum Sound Pressure Level	Rated Power：107dB Peak Power：113dB
Frequency Response	-10dB：60-20kHz
System Configuratio	Two-way crossover
Program Power	120W
Peak Power	240W
Interface	
Audio In	4-pin Phoenix connector × 1
General	
Power	Input impedance: 8Ω/60W
Material	Body: Plastic Steel mesh: Metal
Dimension	Ø247.58 × 111.76 mm
Package Dimension	295mm X 295mm X 160mm
Weight	2924.5g
With Package Weight	2921.5g
Color	Black and white optional
Packing List	Complete unit × 1; SQG × 1; 4-pin Phoenix terminal × 1
Operating Temperature	-10℃ ~ 50℃ , <90%RH
Mounting Hole Dimension	Ø224 mm (8.82")
Installation	Ceiling mount
Mounting Depth	105 mm (4.13")

▪ Dimension


111.76 [4.4]
Ø247.58 [9.75]
Unit: mm [inch]
SCALE 1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®