DS-TMT200-EF
Integrated Intercom Station




- Support real-time video intercom function, integrated echo suppression and noise cancellation technology
- Supports reading M1 card (Frequency: 13.56 MHz)
- Face recognition distance: 20 - 250 cm
- 100,000 face capacity, 500,000 card capacity

▪ Specification

Authentication	
Face Recognition Distance	20 - 250 cm
Card Reading Distance	0 to 4 cm
Capacity	
Face Capacity	100,000
Card Capacity	500,000
Lens	
Lens Type	4mm
Supplement Light	
Supplement Light Type	Warm White Light
LED Light Bead	4
Network	
Protocol	SIP, NTP, RTSP, ISUP5.0
Audio	
Two-Way Audio Mode	Full duplex two-way voice intercom
Audio Encoding	G.711 U
Audio Bit Rate	64 Kbps
Audio Input	All-directional microphone
Audio Output	loudspeaker 5.5 W
Audio Quality	Echo suppression, Noise cancellation
Card Reader	
Card Reader Type	M1 card
Card Reader Frequency	13.56MHz
Camera	
Max. Resolution	4MP
Sensor Type	1/3" Progressive Scan CMOS
Display Screen	
Screen Type	10.1inch LCD screen 1080P
Scan and Recognition	
Recognition Distance	Min 3 cm, Up to 150 cm
Recognition Type	Bar code, QR code
Interface	
Network Interface	1
Alarm Input	2
Alarm Output	2
RS-485	1
Wiegand	1
General	
Working Temperature and Humidity	Temperature: -30 °C to 70 °C (-22 °F to 158 °F) Humidity: 10% - 95% (no condensing)
Power Supply	100-240 VAC
Power Consumption	100W
Dimensions	1220 × 230 × 200 mm (48.0 × 9.1 × 7.9 inch)
Weight	10 kg (22.05 lb.)

Weight (with Package)	13 kg (28.66 lb.)
Dimensions (with Package)	1279 × 310 × 290 mm (50.4 × 12.2 × 11.4 inch)
Material	SPCC

▪ Dimension

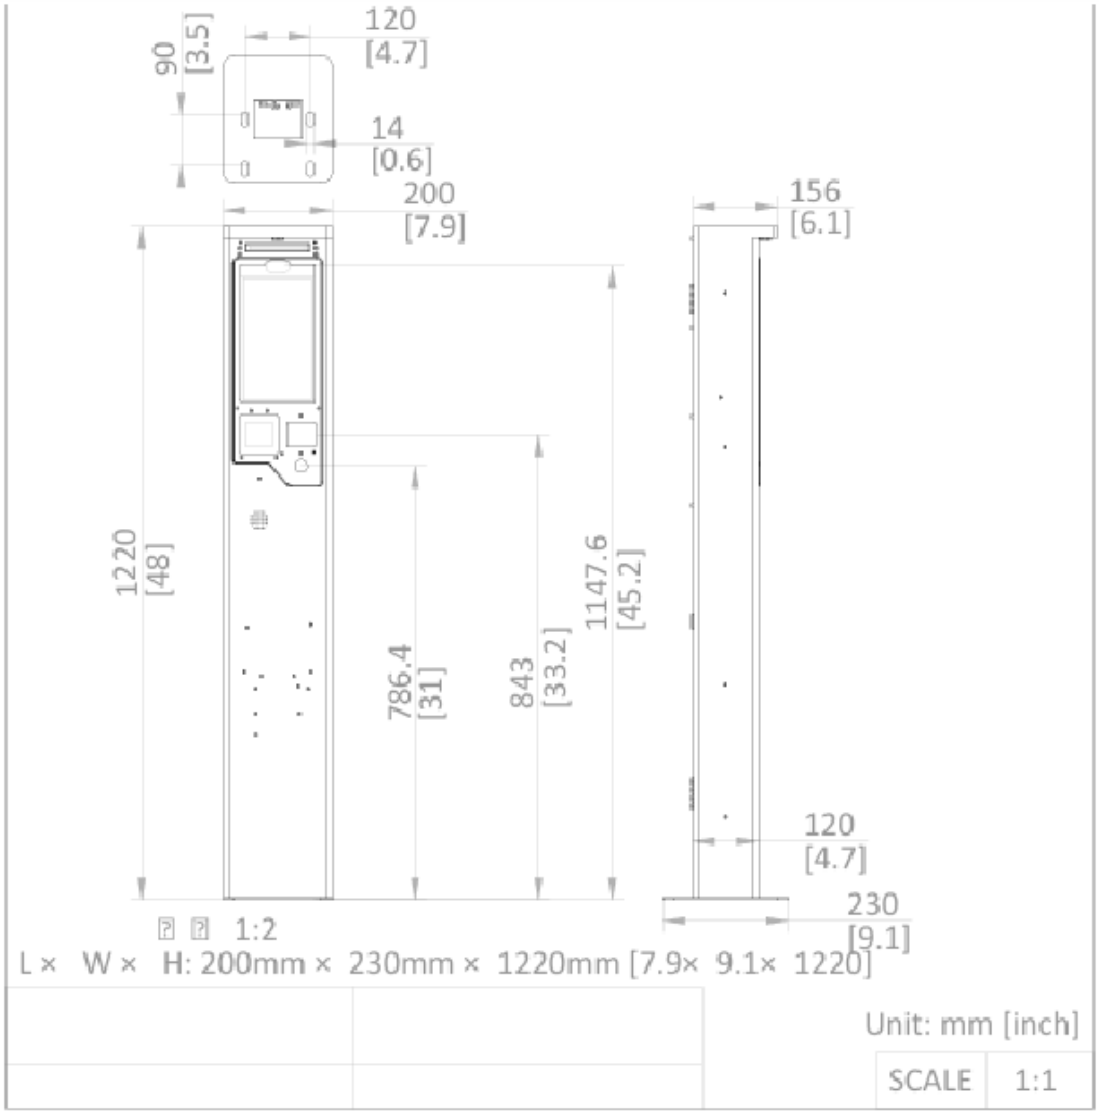

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®