

DS-TMT101-K **Card Reader Intercom Station**




- Supports reading M1 card (Frequency: 13.56 MHz)
- Support real-time voice intercom function, integrated echo suppression and noise cancellation technology

▪ Specification

Authentication	
Card Reading Distance	0 to 4 cm
Capacity	
Card Capacity	50,000
Event Capacity	50,000
Network	
Protocol	SIP, NTP, RTSP, ISUP5.0
Audio	
Audio Encoding	G.711 U
Audio Bit Rate	64 Kbps
Audio Input	All-directional microphone
Audio Output	loudspeaker 5.5 W
Audio Quality	Echo suppression, Noise cancellation
Two-Way Audio Mode	Full duplex two-way voice intercom
Card Reader	
Card Reader Type	M1 card
Card Reader Frequency	13.56MHz
Interface	
Alarm Input	4
Alarm Output	4
Wiegand	4
Network Interface	1
General	
Power Supply	POE 40-57V 0.6A
Dimensions	150 × 95 × 1250 mm (5.91 × 3.74 × 49.21 inch)
Weight	7.35 kg (16.20 lb.)
Weight (with Package)	8 kg (17.64 lb.)
Dimensions (with Package)	407 × 310 × 1360 mm (16.02 × 12.20 × 53.54 inch)
Working Temperature and Humidity	Temperature: -30 °C to 70 °C (-22 °F to 158 °F) Humidity: 10% - 95% (no condensing)
Power Consumption	20 W
Material	SGCC

▪ Dimension

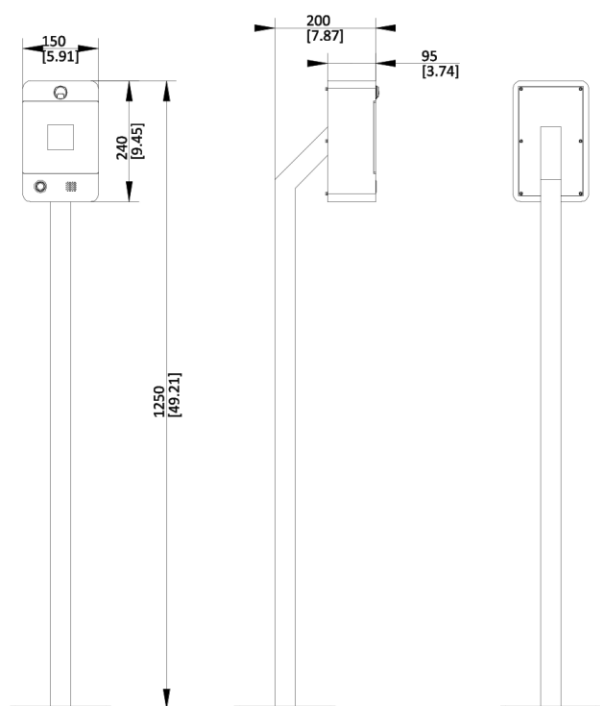

Unit: mm [inch]

See Far, Go Further



www.hikvision.com
support@hikvision.com

