


DS-TME200-D(K) Entrance & Exit Controller



- Supports Entrance & Exit management of 4 lanes.
- TCP/IP network communication, with self-adaptive network interface. The communication data is encrypted to ensure information security.
- Supports 4 Wiegand interface for accessing card reader. Wiegand interface supports W26/ W34 and is seamlessly compatible with third-party card reader.
- Massive storage with 100,000 cards information and 100,000 card swiping records. Supports various card types such as normal/blocklist/Registered
- Supports 4 alarm output interface for controlling up to 4 barrier gates.
- Supports online and offline operating mode.
- Supports time synchronization via NTP, manual or automatic method

▪ Specification


Network	
Interface Protocol	TCP/IP
Interface	
Relay Output	4
Alarm Input	4
Wiegand	4*W26/34
RS-232	1
RS-485	1
USB	1*USB2.0
Network	1*10M/100M self-adaption
General	
Working Temperature and Humidity	-20°C ~50°C (-4°F ~122°F) 10% ~ 95%
Power Supply	12V DC
Power Consumption	20W (5 W without load)
Dimensions	191 × 95.3 × 22.7 mm (7.52 × 3.75 × 0.89 inch)
Weight	0.4 kg (0.88 lb.)
Weight (with Package)	1 kg (2.2 lb.)
Dimensions (with Package)	350 × 234 × 86 mm (13.78 × 9.21 × 3.39 inch)
Operating System	Embedded Linux System

▪ Available Model

DS-TME200-D(K)

DS-TME200-D(K)(unpackaged)

▪ Dimension

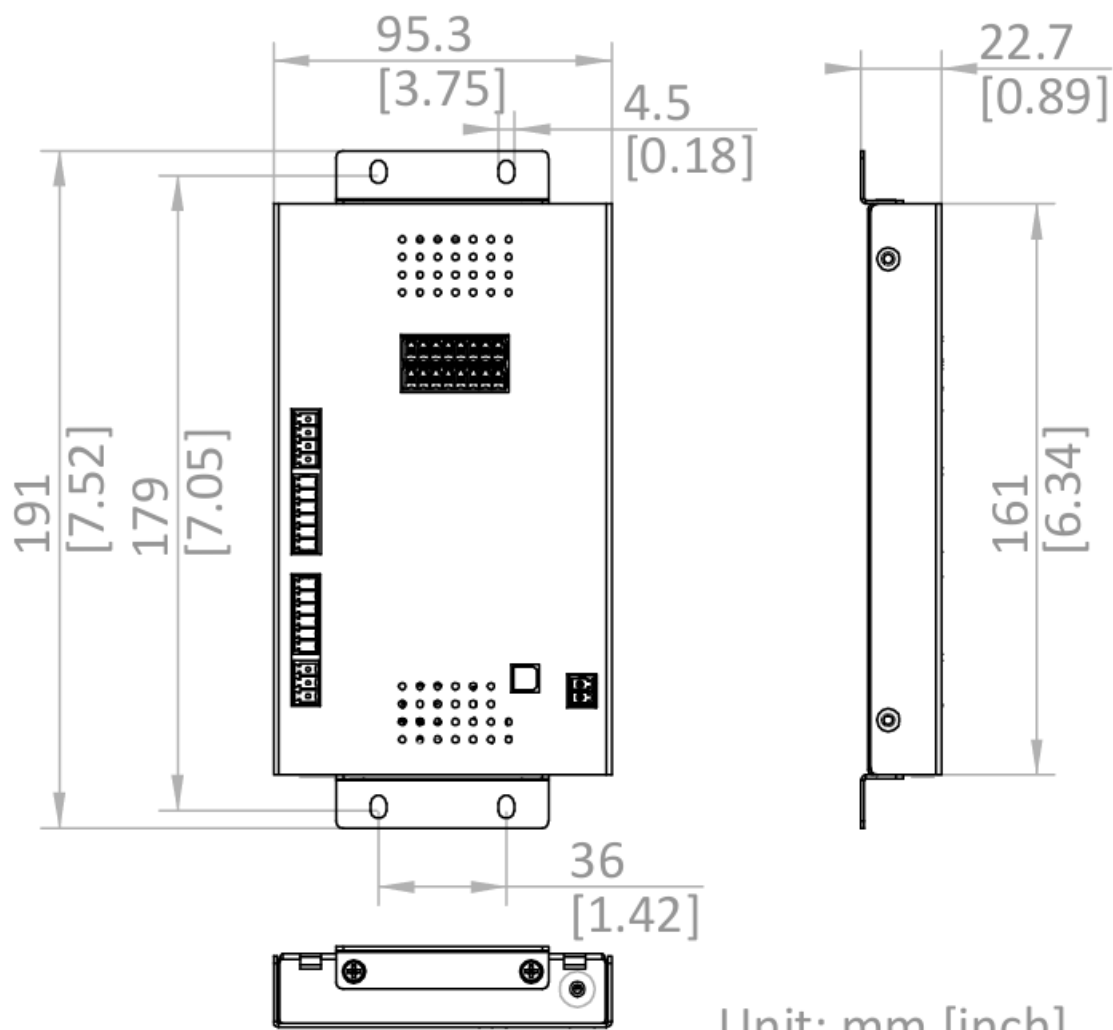

See Far, Go Further



www.hikvision.com
support@hikvision.com

