

DS-TME200-D(K)/P Entrance & Exit Controller




- Supports Entrance & Exit management of 4 lanes.
- TCP/IP network communication, with self-adaptive network interface. The communication data is encrypted to ensure information security.
- Supports 4 Wiegand interface for accessing card reader. Wiegand interface supports W26/W34 (If need to connect with other non-UHF readers, please confirm with the headquarters in advance) .
- Massive storage with 100,000 cards information and 100,000 card swiping records. Supports various card types such as normal/blocklist/Registered
- Supports 4 alarm output interface for controlling up to 4 barrier gates.
- Supports online and offline operating mode.
- Supports time synchronization via NTP, manual or automatic method

▪ Specification

Network	
Interface Protocol	TCP/IP
Interface	
Relay Output	4
Alarm Input	4
Wiegand	4*W26/34
RS-232	1
RS-485	1
USB	1*USB2.0
Network	1*10M/100M self-adaption
General	
Working Temperature and Humidity	-20°C ~ 50°C (-4°F ~ 122°F) 10% ~ 95%
Power Supply	220V AC by default, 110V AC requires set on power switch
Power Consumption	20W (5 W without load)
Dimensions	467 × 350 × 190.6 mm (18.39 × 13.78 × 7.5 inch)
Weight	4 kg (4.40 lb.)
Weight (with Package)	5 kg (5.50 lb.)
Dimensions (with Package)	500 × 420 × 290 mm (19.69 × 16.54 × 11.42 inch)
Operating System	Embedded Linux System

▪ Dimension

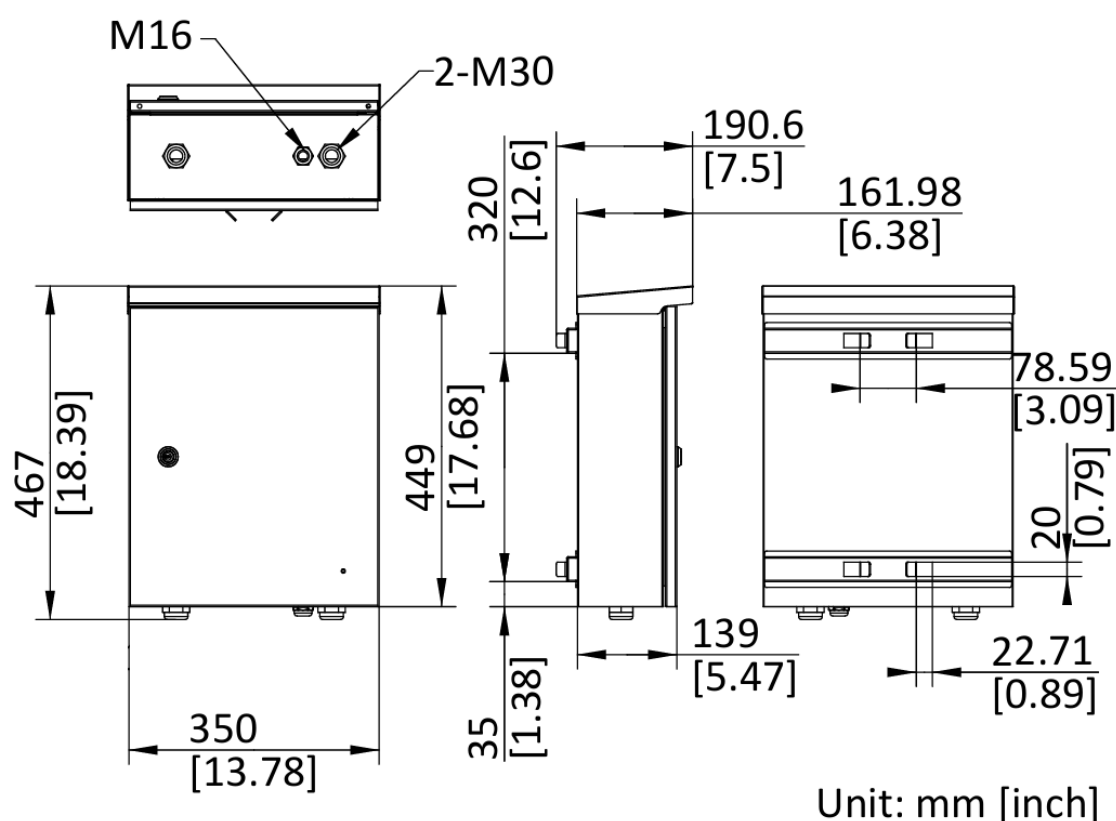



See Far, Go Further



www.hikvision.com
support@hikvision.com

