DS-KH8560-WTE1
IP Indoor Station






- 10.1-inch IPS touch screen with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy wizard for quick set up on touch screen without PC
- Rich functions and extensions
- Live-view of the door station and cameras in public areas
- Voice message recording when calls are unanswered
- Alarm system integration: receive alerts and notify the monitoring center for timely response
- Elevator access control

▪ Specification


System parameters	
Operation system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	10-inch colorful IPS screen
Operation method	Capacitive touch screen
Type	Colorful IPS screen
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711u, G.711a, Opus, AAC-LD, AAC-LC, G.726, G.722.1, G.729
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Message capacity	TF card inserted: 200 captured pictures, 200 alarm records Without TF card: 2 MB RAM for picture storage; The storage number is decided by the picture size, 200 alarm records
Notice capacity	200
Linked network camera capacity	16
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Network parameters	
Network protocol	TCP/IP, RTSP, SIP, IPv6, ONVIF
Wi-Fi	WiFi 802.11b/g/n
Bluetooth	Reserved
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100Mbps self-adaptive
TAMPER	/
RS-485	1
USB	/

TF card	Support TF card, up to 128 GB
Alarm output	/
Power supply output	Max. 12VDC 0.2 A (Only when powered by PoE)
Debugging port	1
Relay	2 relays, Max. 30VDC 0.3A
General	
Button	1 physical button(s)
Installation	Surface mounting
Indicator	/
Weight	Without package: 490 g (1.08 lb),With package: 884 g (1.95 lb)
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (non-condensing)
Dimension (W × H × D)	272.7 mm × 177.1 mm × 21.62 mm (9.95" × 6.97" × 0.85")
Battery	/
Application environment	Indoor
Power supply	IEEE 802.3af, Standard PoE,12 VDC
Power consumption	≤ 12 W
Language	English, Arabic, French, Russian, Spanish, Spanish (Latin America), Italian, German, Polish, Turkish, Portuguese, Portuguese (Brazil), Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese
Material	Plastic casing

▪ Dimension

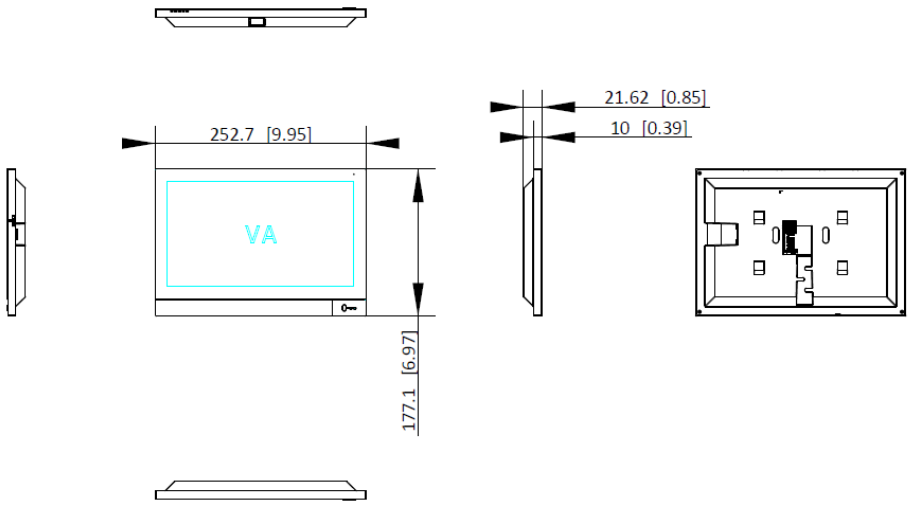

Unit:mm [inch]

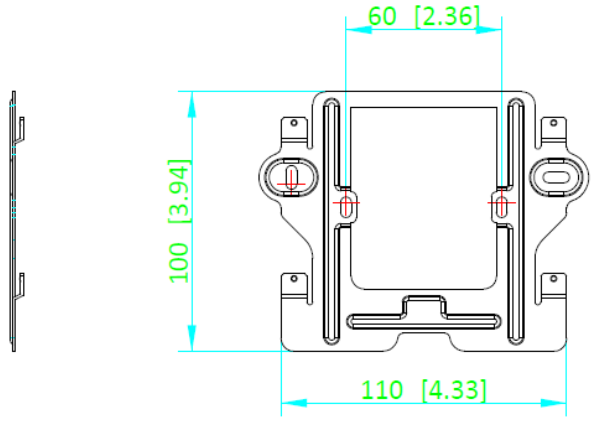

Unit:mm [inch]

▪ Accessory

▪ Optional

DS-KABH6320B-T


See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®