DS-KIS604-S(D)
IP video intercom kit





- IP video intercom for villa or house
- One call button for easier calls
- Convenient Hik-Connect App mobile control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) x 1, DS-KH6320-WTE(B) x 1, 4 port standard PoE switch x 1, DS-KABV8113-RS/Surface x 1, Administrator card x 1, Key fob x 5, PSU x 1


▪ Specification

Door station	
Operation system	Embedded Linux operation system
Flash	32 M
RAM	256 M
Door station	
Supplement light	IR supplement
Resolution	Main stream : 1920 × 1080p, 1280 x 720p Sub stream : 1280 x 720p, 640 × 480
Lens	1
WDR	Support
FOV	Horizontal: 124° Vertical: 75°
Video compression standard	H.264; h.265; MJPEG
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (more than 80 dB within 30 cm)
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Audio compression standard	G711U、G711A、G726、AAC_LC、AAC_LD、OPUS、G722.1
Audio compression Rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Door station	
User capacity	2000
Door station	
Network protocol	TCP/IP, RTSP, IPV6,ONVIF
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	Wi-Fi 802.11 b/g/n
3G/4G	/
Bluetooth	/
Door station	
Network interface	1
RS-485	1
Wiegand	0
Alarm input	4
Lock control	2
Exit button	2 Max.
Door contact	2
Alarm output	0
Power interface	1
TAMPER	1
USB interface	0
TF card	1 (reserved)
Door station	
Button	1
Power consumption	< 10 W

Indicator	3
Power supply	Standard PoE/12 VDC
Working temperature	-40° C to 53° C(-40° F to 127.4° F)
Working humidity	10% to 95%
Power consumption	< 10 W
Dimension	174 mm × 91 mm × 29 mm
Protection level	IP65, IK08
Application environment	Outdoor
Weight	380 g
Installation	Surface Mounting
Indicator	3
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
Operation system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Indoor station	
Screen size	7-inch colorful TFT screen
Type	Colorful TFT screen
Resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Lens	/
Resolution	/
Wide dynamic range (WDR)	/
FOV	/
Video compression standard	/
Indoor station	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711u, G.711a, Opus, AAC-LD, AAC-LC, G.726, G.722.1, G.729
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Indoor station	
Notice capacity	200
Linked network camera capacity	16
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Indoor station	
Network protocol	TCP/IP, RTSP, SIP, IPv6, ONVIF
Wi-Fi	WiFi 802.11b/g/n


Bluetooth	Reserved
3G/4G	/
Indoor station	
Alarm input	8
Network interface	1 RJ-45 10/100Mbps self-adaptive
TAMPER	/
RS-485	1
USB	/
TF card	Support TF card, up to 128 G
Alarm output	/
Power supply output	Max. 12VDC 0.2 A (Only when powered by PoE)
Debugging port	1
Relay	2 relays, Max. 30VDC 0.3A
Indoor station	
Button	/
Power supply	IEEE802.3af, Standard PoE,12 VDC
Power consumption	≤ 12 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	200 mm × 140 mm × 23.3 mm (7.87" × 5.51" × 0.92")
Installation	Surface mounting
Application environment	Indoor
Protective level	/
Weight	Without package: 339.1 g (0.75 lb),With package: 562.4g (1.24 lb)
Language	English, Arabic, French, Russian, Spanish, Spanish (Latin America), Italian, German, Polish, Turkish, Portuguese, Portuguese (Brazil), Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese

▪ Dimension

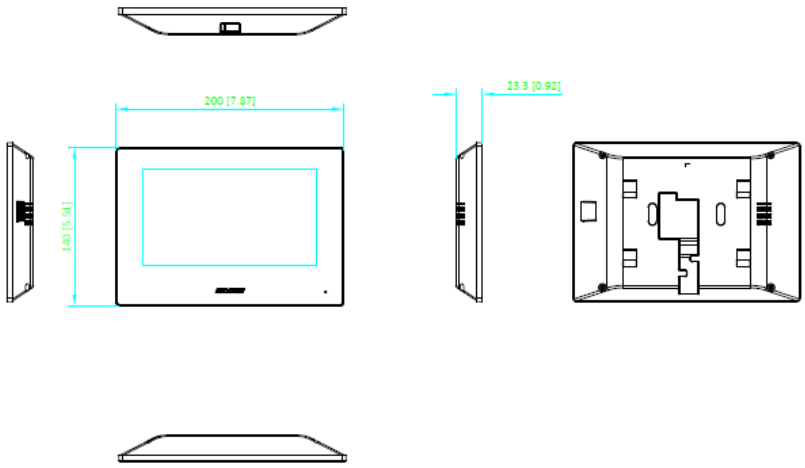

Unit:mm [inch]

SCALE	1:1

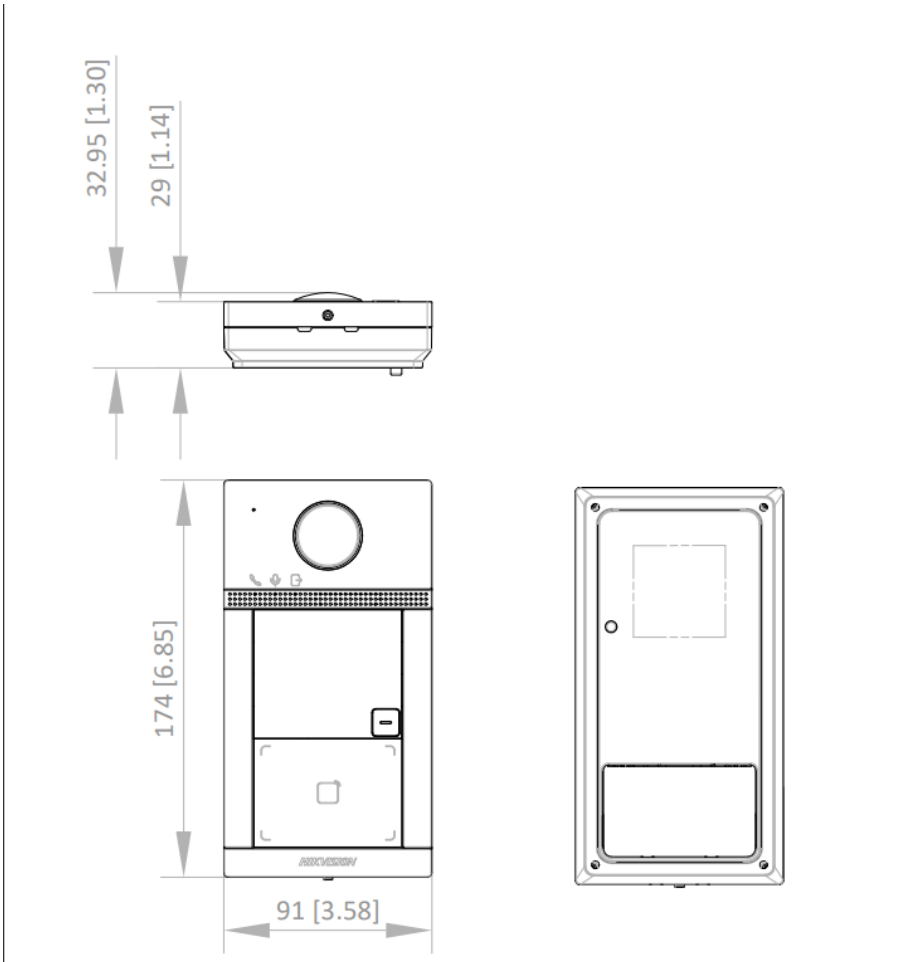

Unit:mm [inch]

SCALE	1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®