


DS-K7R06-433**Turnstile Remote Controller**

- Supports one-to-one and one-to-many (Max. 6 lanes) communication pairing.
- Convenient to hang on the key chain, easy to use for security managers
- Simple and convenient control and management for turnstiles.

▪ Specification

System	
Battery life	400 days based on 100 clicks per day.
Hardware	
Button	x 4
General	
Indicator	Green for 1 to 1 mode, blue for 1 to many mode, red for power out.
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (No condensing)
Dimensions	Without package: 35 mm × 64 mm × 11.2 mm (1.2" × 2.1" × 0.4") With package: 60 mm × 40 mm × 80 mm (2.0" × 1.3" × 2.0")
Weight	Net: 15.5g, Gross: 50g
Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	3V CR2032

▪ Dimension

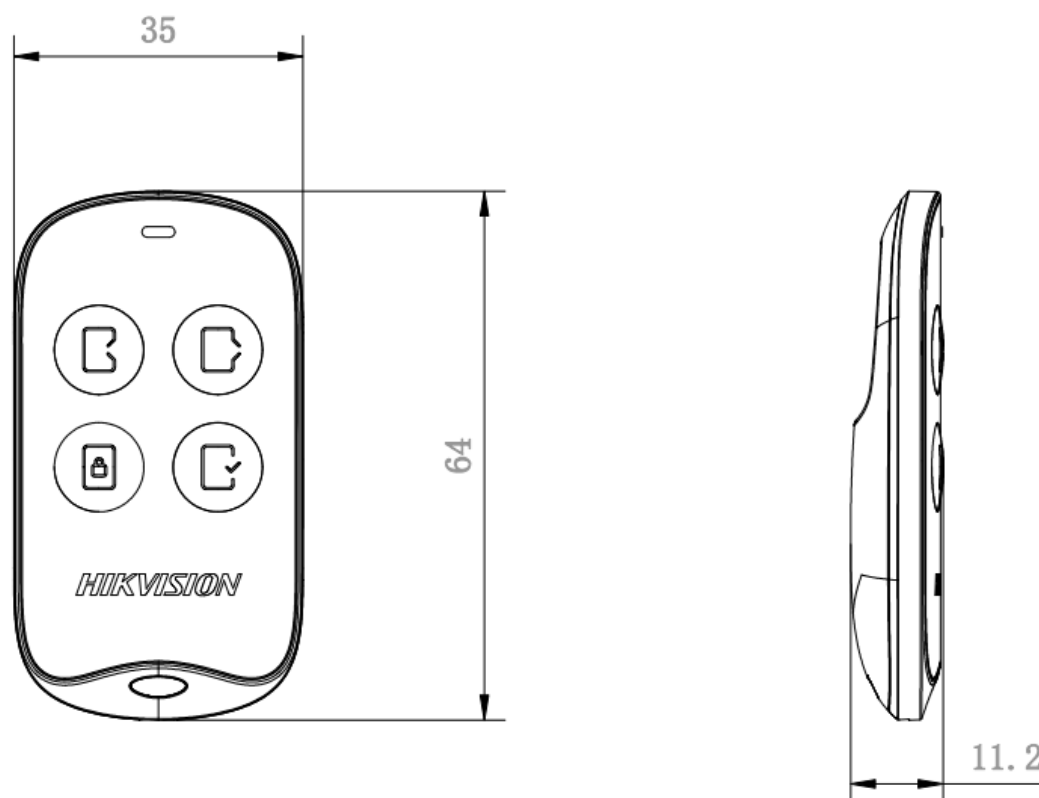

▪ Accessory

▪ Optional

DS-K6Y552X

DS-K6BC402TX

DS-K6BC402X-RS

DS-K6B530TX

DS-K6B630TX

				
DS-K6B653X	DS-K6BC402X	DS-K6B961X	DS-K6B221TEX	DS-K6B221TMX
				
DS-K6B961TX	DS-K6B530TX/Mod ular	DS-K6B411TX	DS-K6Y220TX	DS-K6B411TX/Mod ular
				

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®