

DS-D5065U3-1V0S 65 inch Monitor



- Supports 3840 × 2160 UHD display
- 60 Hz continuous high-speed refresh rate for smoother dynamic performance
- Ultra-narrow three-sided bezel with a slim profile
- Multiple interfaces to meet daily needs


▪ Specification

Model		DS-D5065U3-1V0S
Display	Screen Size	65 inch, 165.1 cm
	Active Display Area	1428.48 (H) mm × 803.52 (V) mm, 114.78 dm ²
	Resolution	3840 × 2160 @ 60 Hz
	Backlight	D-LED
	Pixel Pitch	0.124 (H) mm × 0.372 (V) mm
	Brightness	300 cd/m ²
	Color Depth	1.07 G
	Color Gamut	72% NTSC
	Contrast Ratio	5000 : 1
	Refresh Rate	60 Hz
	Reliability	7 × 24 H
	Surface Treatment	Haze 2%, 3H
Interface	Video & Audio Input	HDMI2.0 × 1, DP1.2 × 1, VGA × 1, LINE-IN × 1
	Video & Audio Output	NA
	Data Transmission Interface	USB2.0 × 1
	Control Interface	RS232-IN × 1, RS232-OUT × 1
Power	Power Supply	100~240 V, 50/60 Hz
	Power Consumption	≤ 160 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C ~ 40 °C
	Working Humidity	20% ~ 80% RH (Non-Condensing)
	Storage Temperature	-20 °C ~ 60 °C
	Storage Humidity	10% ~ 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	100 × 100mm
	Bezel Width	400 mm × 300 mm
	Product Dimensions (W × H × D)	1444.8 (W) mm × 828.2 (H) mm × 85.0 (D) mm (Without base) 1444.8 (W) mm × 827.2 (H) mm × 230.7 (D) mm (With base)

	Standby Time	600s
	Package Dimensions (W × H × D)	1667 (W) mm × 1052 (H) mm × 202 (D) mm
	Net Weight	15.0 ± 0.5 kg
	Gross Weight	22.6 ± 0.5 kg
	Packing List	Monitor × 1, Base Assembly × 2, Base Screw × 6, HDMI Cable (1.5 m) × 1, Remote Control × 1, User Manual × 1, Multi-language Manual × 1

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 2.0 digital signal input interface	DP	DP 1.2 digital signal input interface
VGA	VGA analog signal input	USB	USB2.0,input interface
Line-in	3.5mm Audio input interface	RS232 IN	RS232 IN,input interface
RS232 OUT	RS232 OUT,input interface		

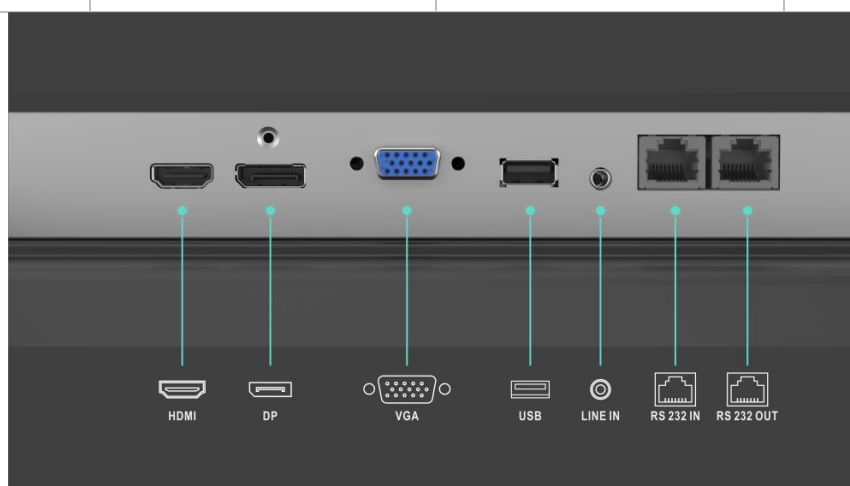

▪ Dimension

See Far, Go Further



www.hikvision.com
support@hikvision.com

