

DS-7616NXI-I2/S 16-ch 1U AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 32-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

▪ **Function**

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Compatible to third-party network cameras

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm

Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

▪ Specification

Devices and Servers	
Heat Map Cameras	1.heatmap data record and presentation
Intelligent Analytics	
AI by NVR	<p>DS-7616NXI-I2/S:Facial recognition, perimeter protection, motion detection 2.0 DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Facial recognition, perimeter protection, motion detection 2.0</p>
AI by Camera	<p>DS-7616NXI-I2/S:Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p>
Engine	<p>DS-7616NXI-I2/S:1, engine mode is adjustable DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1, engine mode is adjustable</p>
Perimeter Protection	
Human/Vehicle Analysis	<p>DS-7616NXI-I2/S:N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):</p> <p>DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C):Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm Up to 12 rules in total</p>
By NVR	<p>DS-7616NXI-I2/S:4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total</p>

By Camera	DS-7616NXI-I2/S:All channels DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels
Facial Recognition	
Face Picture Library	DS-7616NXI-I2/S: Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)
Face Picture Comparison	DS-7616NXI-I2/S:8-ch DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):8-ch DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):4-ch face picture comparison alarm
Facial Detection and Analytics	DS-7616NXI-I2/S:Face picture comparison, human face capture, face picture search Face picture comparison, human face capture, face picture search
Facial Detection and Analytics Performance	DS-7616NXI-I2/S:4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265) DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1-ch human face capture (HD network camera, up to 8 MP , H.264/H.265) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Motion Detection 2.0	
Human/Vehicle Analysis	DS-7616NXI-I2/S:N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):16-ch
By NVR	DS-7616NXI-I2/S:All channels for Hikvision cameras DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels for Hikvision cameras
By Camera	DS-7616NXI-I2/S:All channels DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels

ANPR	
By Camera	<p>DS-7616NXI-I2/S:All channels</p> <p>Support Countries & Regions:</p> <ol style="list-style-type: none"> 1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia 2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein 3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon 4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):All channels</p>
Vehicle Attributes	<p>DS-7616NXI-I2/S:Vehicle brand, vehicle color, vehicle type</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Plate number, license plate color, license plate type</p>
Plate Attributes	<p>DS-7616NXI-I2/S:Plate number, license plate color, license plate type</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Vehicle brand, vehicle color, vehicle type</p>
Video and Audio	
IP Video Input	<p>DS-7616NXI-I2/S:16-ch</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):16</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):16-ch</p>
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	256 Mbps

HDMI Output	<p>DS-7616NXI-I2/S:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz</p>
VGA Output	<p>DS-7616NXI-I2/S:1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1920 × 1080/60 Hz</p>
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Decoding	
Decoding Format	<p>DS-7616NXI-I2/S: H.265+/H.265/H.264+/H.264</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):H.265+/H.265/H.264+/H.264</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):H.265,H.265+,H.264,H.264+,MPEG4</p>
Recording Resolution	<p>DS-7616NXI-I2/S:32 MP/24 MP/16MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p> <p>DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF</p> <p>DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>32MP/24MP/12MP/8MP/7MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/D CIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p>
Synchronous playback	16-ch

Live View Window Division	DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16 DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1/4/6/8/9/16
Aux Port Window Division	DS-7616NXI-I2/S:1/4/6/8/9/16,1/2/4/6/8/9/16 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):1/2/4/6/8/9/16 DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1/4/6/8/9/16
Decoding Capability	DS-7616NXI-I2/S:Enable AI by NVR: 20-ch@1080p (30 fps) 1-ch@32 MP (30 fps); 1-ch@24 MP (30 fps); 2-ch@16MP (30 fps); 3-ch@12MP (30 fps);5-ch@8 MP (30 fps); 6-ch@6 MP (30 fps);8-ch@5 MP (30 fps);10-ch@4 MP (30 fps);16-ch@2 MP (30 fps); Disable AI by NVR: 32-ch@1080p (30 fps) 2-ch@32 MP (30 fps); 2-ch@24 MP (30 fps); 4-ch@16MP (30 fps); 5-ch@12MP (30 fps);8-ch@8 MP (30 fps); 8-ch@6 MP (30 fps); 12-ch@5 MP (30 fps); 16-ch@4 MP (30 fps); DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):16-ch @ 1080p (30 fps) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps)
Dual-Stream Recording	Support
Audio Compression	DS-7616NXI-I2/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中 性):G.711ulaw,G.711alaw,G.722,G.726,MP2L2 DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中 性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Stream Type	Video, Video & Audio
Network	
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Remote Connection	DS-7616NXI-I2/S:128 DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):128

Network Protocol	DS-7616NXI-I2/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
API	DS-7616NXI-I2/S:ONVIF (profile S/G); SDK; ISAPI DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	DS-7616NXI-I2/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Camera Access Protocol	ONVIF(Version 2.5), RTSP
Auxiliary Interface	
SATA	2 SATA interfaces
Capacity	DS-7616NXI-I2/S:Up to 16 TB capacity for each disk DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E),DS-7616NXI-I2/S(标配)(E)/BRA/MAO/CKD:Up to 16 TB capacity for each disk DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):Up to 8 TB capacity for each disk
Serial Interface	DS-7616NXI-I2/S:N/A DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):RS-485 (half-duplex), RS-232, Keyboard
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power Supply	DS-7616NXI-I2/S:100 to 240 VAC, 50 to 60 Hz DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):100 to 240 VAC, 50 to 60 Hz DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 40 W


<p>GUI Language</p>	<p>DS-7616NXI-I2/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p>
<p>Consumption</p>	<p>DS-7616NXI-I2/S:≤ 30 W (without HDD) DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 15W DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): ≤ 30 W (without HDD)</p>
<p>Working Temperature</p>	<p>DS-7616NXI-I2/S:-10 °C to 55 °C (14 °F to 131 °F) DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):-10°C ~ +55°C DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):-10° C to 55° C (14° F to 131° F)</p>
<p>Working Humidity</p>	<p>10% to 90%</p>
<p>Chassis</p>	<p>DS-7616NXI-I2/S:1U chassis DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):1U DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E): 1U chassis</p>
<p>Dimension (W × D × H)</p>	<p>DS-7616NXI-I2/S:385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):385 × 315 ×52 mm (11.6"× 9.5" × 1.6")</p>
<p>Weight</p>	<p>DS-7616NXI-I2/S:≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋 HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性):≤ 1.6 kg (3.5 lb)</p>

Certification	
Obtained Certification	DS-7616NXI-I2/S:CE, CB, REACH, WEEE, UKCA, LOA DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA
CE	DS-7616NXI-I2/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 DS-7616NXI-I2/S(中性)(C),DS-7616NXI-I2/S(标配)(C),DS-7616NXI-I2/S(标配)(C)/阿联酋HTL,DS-7616NXI-I2/S(标配),DS-7616NXI-I2/S(中性): DS-7616NXI-I2/S(标配)(E),DS-7616NXI-I2/S(中性)(E):EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4


▪ Typical Application

▪ Physical Interface

No.	Description	No.	Description
1	LAN1 and LAN2 network interfaces	6	USB 3.0 interface and VIDEO OUT
2	AUDIO IN//AUDIO OUT	7	Power supply
3	HDMI interface	8	GND
4	VGA interface	9	Power switch
5	ALARM IN/OUT		

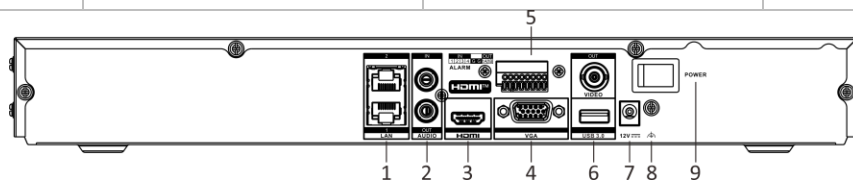

▪ Dimension

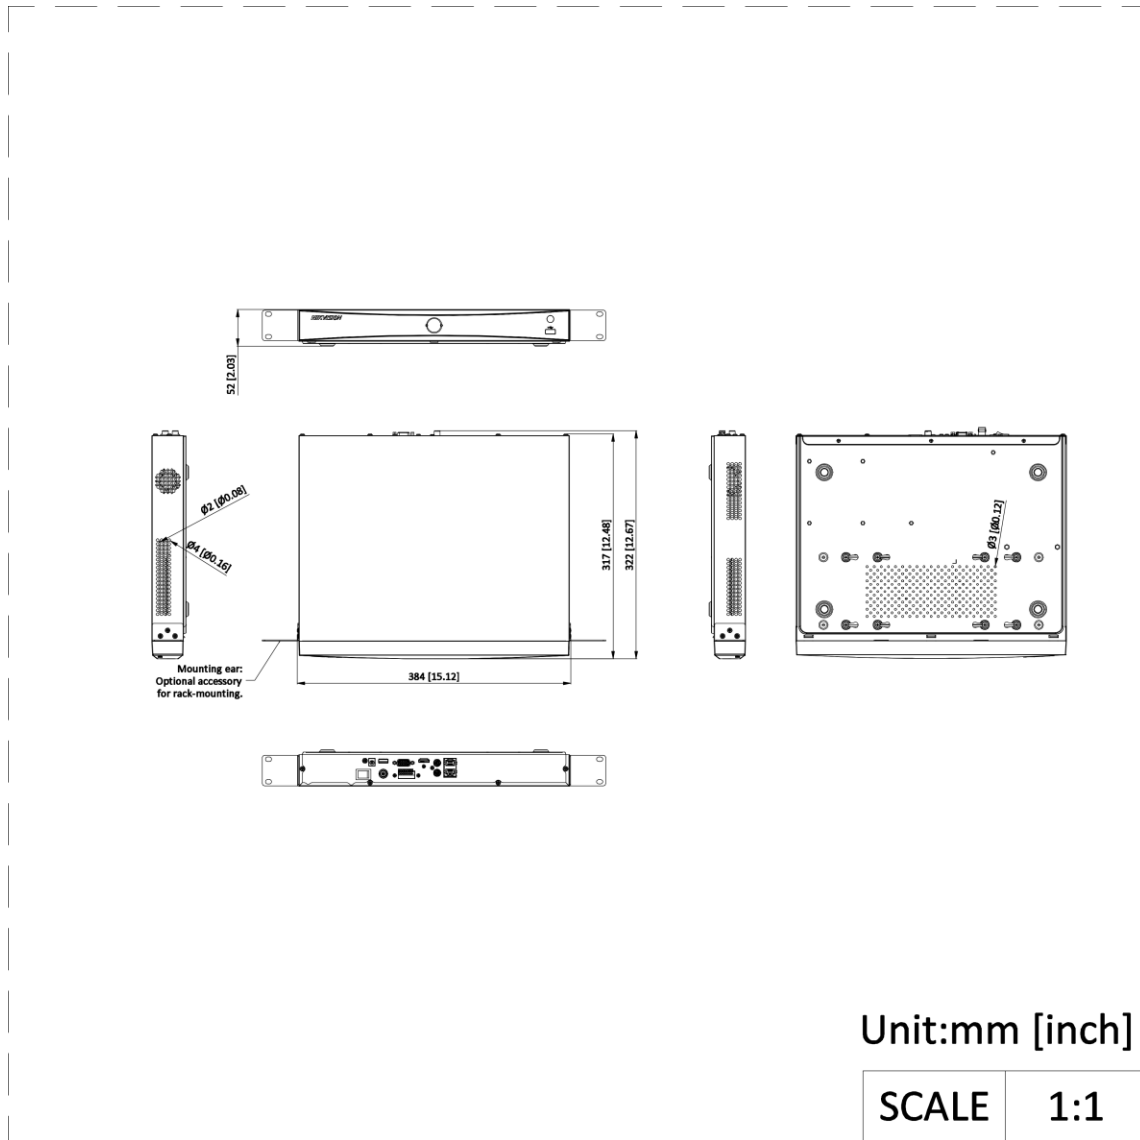

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

