

DS-7732NXI-I4/16P/S 32-ch 1U 16 POE AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 32-ch IP camera inputs
- Up to 16-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%

- Full channel IP cameras connection

- Compatible to third-party network cameras

HD Video Output

- Provide independent HDMI and VGA outputs

- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection

- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events

- Smart search for the selected area in the video, and smart playback to improve the playback efficiency

- POS information overlay on live view and playback

- POS triggered recording and alarm

Network & Ethernet Access

- 1 self-adaptive 10/100/1000 Mbps Ethernet interfaces

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

▪ Approval

FCC-SDoC
IC-VoC
RCM
CB
CE-LVD
CE-EMC

▪ Specification

Intelligent Analytics	
AI by Device	Facial recognition, perimeter protection, motion detection 2.0
AI by Camera	Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA
Engine	1, engine mode is adjustable
Facial Recognition	
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Attributes	Wearing glasses, wearing a mask, facial expression, body temperature
Face Picture Library	DS-7732NXI-I4/16P/S:Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)

Face Picture Comparison (Captured from Camera)	DS-7732NXI-I4/16P/S:4-ch DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):8-ch DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:4-ch
Facial Detection and Analytics Performance	DS-7732NXI-I4/16P/S:1-ch human face capture (HD network camera, up to 4 MP, H.264/H.265) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:1-ch human face capture (HD network camera, up to 4 MP, H.264/H.265) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Motion Detection 2.0	
By Device	DS-7732NXI-I4/16P/S:32-ch DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:32-ch DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):All channels for Hikvision cameras
By Camera	All channels

Perimeter Protection	
By Device	4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total
By Camera	DS-7732NXI-I4/16P/S:All channels All channels
ANPR	
By Camera	DS-7732NXI-I4/16P/S:All channels Support Countries & Regions: 1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia 2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein 3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon 4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya All channels
Vehicle Attributes	DS-7732NXI-I4/16P/S:Vehicle brand, vehicle color, vehicle type Plate number, license plate color, license plate type
Plate Attributes	DS-7732NXI-I4/16P/S:Plate number, license plate color, license plate type Vehicle brand, vehicle color, vehicle type

Video and Audio	
IP Video Input	DS-7732NXI-I4/16P/S:32-ch Up to 12 MP resolution DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:32-ch Up to 12 MP resolution DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):32-ch
Incoming Bandwidth	256 Mbps
Outgoing Bandwidth	256 Mbps
HDMI 1 Output	DS-7732NXI-I4/16P/S:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E),DS-7732NXI-I4/16P/S(标配)(E)/越南ANH NGOC T:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz

HDMI 2 Output	DS-7732NXI-I4/16P/S:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI2/VGA independent output DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E),DS-7732NXI-I4/16P/S(标配)(E)/越南ANH NGOC T:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA Output	DS-7732NXI-I4/16P/S:1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E),DS-7732NXI-I4/16P/S(标配)(E)/越南ANH NGOC T:1920 × 1080/60 Hz DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI1/VGA simultaneous output
Video Output Mode	HDMI1/VGA simultaneous output, HDMI2/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)

Decoding	
Decoding Format	DS-7732NXI-I4/16P/S:H.265+/H.265/H.264+/H.264/MPEG4 DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):H.265+/H.265/H.264+/H.264 DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:H.265+/H.265/H.264+/H.264/MPEG4
Recording Resolution	DS-7732NXI-I4/16P/S:12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF 32MP/24MP/12MP/8MP/7MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs. DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	16-ch

Decoding Capability	DS-7732NXI-I4/16P/S:16-ch @ 1080p (30 fps) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:16-ch @ 1080p (30 fps) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps)
Dual-Stream Recording	Support
Stream Type	Video, Video & Audio
Live View Window Division	1/2/4/6/8/9/16/25/32/36
Aux Port Window Division	1/2/4/6/8/9/16/25/32/36
Audio Compression	DS-7732NXI-I4/16P/S:G.711ulaw/G.711alaw/G.722/G.726/MP2L2 DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:G.711ulaw/G.711alaw/G.722/G.726/MP2L2 DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Network	
Network Interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Remote Connection	128
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Camera Access Protocol	ONVIF(Version 2.5), RTSP
PoE	
Interface	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Standard	IEEE 802.3 af/at

Auxiliary Interface	
Serial Interface	DS-7732NXI-I4/16P/S:RS-485 (half-duplex), RS-232, Keyboard DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):2 RS-485 (half-duplex), 1 RS-232 DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:RS-485 (half-duplex), RS-232, Keyboard
SATA	DS-7732NXI-I4/16P/S:4 SATA interfaces supporting hot-plug DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:4 SATA interfaces supporting hot-plug DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):4 SATA interfaces
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each disk
AlarmIn/Out	DS-7732NXI-I4/16P/S:16/4 DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):16/9 DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:16/4
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0

Ctrl 12V	Controllable 12 VDC, 0.5 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	12 VDC, 1 A power output
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew
Power Supply	DS-7732NXI-I4/16P/S:100 to 240 VAC, 50 to 60 Hz Total power: ≤ 360 W DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):100 to 240 VAC, 50 to 60 Hz DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:100 to 240 VAC, 50 to 60 Hz Total power: ≤ 360 W
Consumption	DS-7732NXI-I4/16P/S:≤ 30 W (without HDD) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):≤ 30 W (without HDD and PoE off) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:≤ 30 W (without HDD)


Working Temperature	DS-7732NXI-I4/16P/S:-10 °C to 55 °C (14 °F to 131 °F) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):-10° C to 55° C (14° F to 131° F) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimension (W × D × H)	DS-7732NXI-I4/16P/S:445 × 400 × 75 mm (17.5"× 15.7" × 3.0") DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):440 × 391 × 75 mm (17.3"× 15.4" × 3.0") DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:445 × 400 × 75 mm (17.5"× 15.7" × 3.0")
Weight	DS-7732NXI-I4/16P/S:≤ 7 kg (15.4 lb) (without HDD) DS-7732NXI-I4/16P/S(标配)(E),DS-7732NXI-I4/16P/S(中性)(E):≤ 3.6 kg (without HDD, 7.9 lb.) DS-7732NXI-I4/16P/S(标配),DS-7732NXI-I4/16P/S(中性),废弃/软硬件兼容测试用,DS-7732NXI-I4/16P/S(标配)/南非REGAL,DS-7732NXI-I4/16P/S(标配)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道,DS-7732NXI-I4/16P/S(中性)(C),DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/12T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/6T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/24T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/4T,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/40T,DS-7732NXI-I4/16P/S(标配)(C)/阿联酋SIRA,DS-7732NXI-I4/16P/S(标配)(C)/美分渠道/8T:≤ 7 kg (15.4 lb) (without HDD)

Certification

Obtained Certification	CE, CB, REACH, WEEE, UKCA, LOA
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

▪ Typical Application

▪ Physical Interface

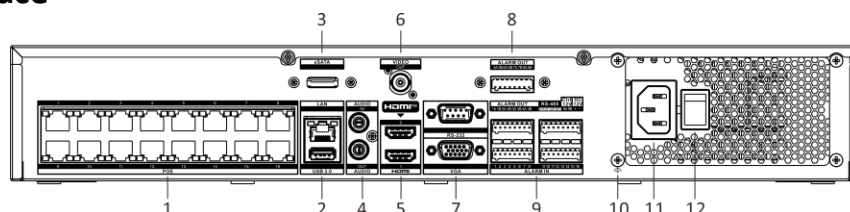

No.	Description	No.	Description
1	PoE interfaces	7	RS-232 and VGA interfaces
2	USB 3.0 and LAN interfaces	8	Alarm out
3	eSATA interface	9	Alarm in, alarm out, RS-485, Ctrl 12V, and DC 12V
4	Audio input and audio output	10	GND
5	HDMI 1 and HDMI 2 interfaces	11	100 to 240 VAC power supply
6	Video output	12	Power switch

▪ Available Model

DS-7732NXI-I4/16P/S(STD)(E)

DS-7732NXI-I4/16P/S(NEU)(E)

DS-7732NXI-I4/16P/S(STD)E/VIE ANH NGOC T

DS-7732NXI-I4/16P/S(STD)

DS-7732NXI-I4/16P/S(NEU)

feiqi

DS-7732NXI-I4/16P/S(STD)/RSA REGAL

DS-7732NXI-I4/16P/S(STD)(C)

DS-7732NXI-I4/16P/S(STD)(C)/US Branch

DS-7732NXI-I4/16P/S(NEU)(C)

DS-7732NXI-I4/16P/S(STD)(C)/US Branch12T

DS-7732NXI-I4/16P/S(STD)(C)/US Branch/6T

DS-7732NXI-I4/16P/S(STD)(C)/US/24T


DS-7732NXI-I4/16P/S(STD)(C)/US Branch/4T

DS-7732NXI-I4/16P/S(STD)(C)/US Branch40T

DS-7732NXI-I4/16P/S(STD)(C)/UAE SIRA

DS-7732NXI-I4/16P/S(STD)(C)/US Branch/8T

▪ Dimension

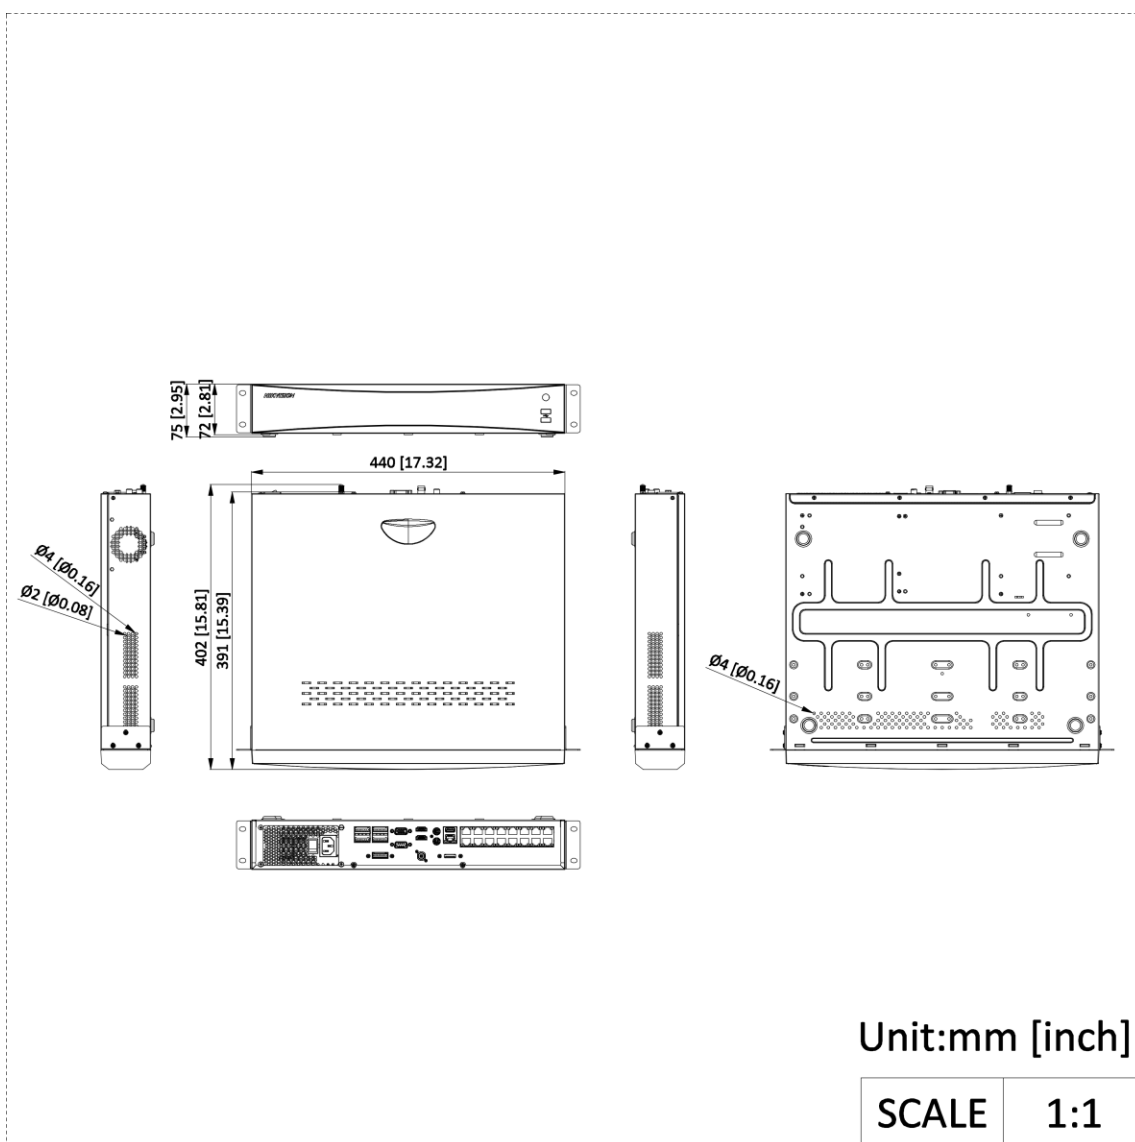

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

