

DS-7616NXI-I2/16P/S 16-ch 1U 16 POE AcuSense 4K NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 32-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Compatible to third-party network cameras

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution


Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm

Network & Ethernet Access

- 16 independent PoE network interfaces
 - 1 self-adaptive 10/100/1000 Mbps Ethernet interfaces
 - Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 

▪ Specification

Intelligent Analytics	
AI by NVR	<p>DS-7616NXI-I2/16P/S:Facial recognition, perimeter protection, motion detection 2.0 DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分 渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标 配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Facial recognition, perimeter protection, motion detection 2.0</p>
AI by Camera	<p>DS-7616NXI-I2/16P/S:Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标 配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分 渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标 配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p>
Engine	<p>DS-7616NXI-I2/16P/S:1, engine mode is adjustable DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标 配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分 渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标 配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):1, engine mode is adjustable</p>

Perimeter Protection	
Human/Vehicle Analysis	<p>DS-7616NXI-I2/16P/S:N/A</p> <p>DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道:Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm</p> <p>Up to 12 rules in total</p>
By NVR	<p>DS-7616NXI-I2/16P/S:4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;</p> <p>Up to 12 rules in total</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;</p> <p>Up to 12 rules in total</p>
By Camera	<p>DS-7616NXI-I2/16P/S:All channels</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):All channels</p>

Facial Recognition	
Face Picture Library	<p>DS-7616NXI-I2/16P/S:Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 150 MB)</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)</p>
Face Picture Comparison	<p>DS-7616NXI-I2/16P/S:8-ch</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):8-ch</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):4-ch face picture comparison alarm</p>
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Facial Detection and Analytics Performance	<p>DS-7616NXI-I2/16P/S:4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p>

Motion Detection 2.0	
Human/Vehicle Analysis	<p>DS-7616NXI-I2/16P/S:N/A</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):16-ch</p>
By NVR	<p>DS-7616NXI-I2/16P/S:All channels for Hikvision cameras</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):All channels for Hikvision cameras</p>
By Camera	<p>DS-7616NXI-I2/16P/S:All channels</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):All channels</p>

ANPR	
By Camera	<p>DS-7616NXI-I2/16P/S:All channels</p> <p>Support Countries & Regions:</p> <ol style="list-style-type: none"> 1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia 2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein 3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon 4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):All channels</p>
Vehicle Attributes	<p>DS-7616NXI-I2/16P/S:Vehicle brand, vehicle color, vehicle type</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Plate number, license plate color, license plate type</p>

Plate Attributes	<p>DS-7616NXI-I2/16P/S:Plate number, license plate color, license plate type DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Vehicle brand, vehicle color, vehicle type</p>
Video and Audio	
IP Video Input	<p>DS-7616NXI-I2/16P/S:16-ch DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):16 DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):16-ch</p>
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	256 Mbps
HDMI Output	<p>DS-7616NXI-I2/16P/S:4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E),DS-7616NXI-I2/16P/S(标配)(E)(2×8T):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz</p>

VGA Output	<p>DS-7616NXI-I2/16P/S:1920 × 1080/60 Hz</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E),DS-7616NXI-I2/16P/S(标配)(E)(2×8T):1920 × 1080/60 Hz</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):1-ch, 1920 × 1080/60Hz</p>
Video Output Mode	HDMI/VGA independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Decoding	
Decoding Format	<p>DS-7616NXI-I2/16P/S:H.265+/H.265/H.264+/H.264</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):H.265+/H.265/H.264+/H.264</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):H.265,H.265+,H.264,H.264+,MPEG4</p>

Recording Resolution	<p>DS-7616NXI-I2/16P/S:32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF</p> <p>32MP/24MP/12MP/8MP/7MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF</p> <p>*: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.</p>
Synchronous playback	16-ch
Live View Window Division	<p>DS-7616NXI-I2/16P/S:1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):1/4/6/8/9/16</p>
Aux Port Window Division	<p>DS-7616NXI-I2/16P/S:1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):1/2/4/6/8/9/16</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):1/4/6/8/9/16</p>

Decoding Capability	<p>DS-7616NXI-I2/16P/S:Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps) DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):16-ch @ 1080p (30 fps) DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps)</p>
Dual-Stream Recording	Support
Audio Compression	<p>DS-7616NXI-I2/16P/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):G.711ulaw,G.711alaw,G.722,G.726,MP2L2 DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM</p>
Stream Type	Video, Video & Audio
Network	
Network Interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Remote Connection	<p>DS-7616NXI-I2/16P/S:128 DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):128</p>

Network Protocol	<p>DS-7616NXI-I2/16P/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS</p>
API	<p>DS-7616NXI-I2/16P/S:ONVIF (profile S/G); SDK; ISAPI</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):ONVIF (profile S/G); SDK; ISAPI</p>
Compatible Browser	<p>DS-7616NXI-I2/16P/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version</p>
Camera Access Protocol	ONVIF(Version 2.5), RTSP
PoE	
Interface	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200W
Standard	IEEE 802.3 af/at
Auxiliary Interface	
SATA	2 SATA interfaces

Capacity	<p>DS-7616NXI-I2/16P/S:Up to 16 TB capacity for each disk</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):Up to 10 TB capacity for each disk</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):Up to 14 TB capacity for each disk</p>
Serial Interface	<p>DS-7616NXI-I2/16P/S:N/A</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):RS-485 (half-duplex), RS-232, Keyboard</p>
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power Supply	<p>DS-7616NXI-I2/16P/S:100 to 240 VAC, 50 to 60 Hz</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):100 to 240 VAC, 50 to 60 Hz</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):≤ 280 W</p>


<p>GUI Language</p>	<p>DS-7616NXI-I2/16P/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p>
<p>Consumption</p>	<p>DS-7616NXI-I2/16P/S:≤ 30 W (without HDD and PoE off)</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):≤ 30 W (without HDD and PoE off)</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):≤ 15W</p>
<p>Working Temperature</p>	<p>DS-7616NXI-I2/16P/S:-10 °C to 55 °C (14 °F to 131 °F)</p> <p>DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道</p> <p>/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):-10°C ~ +55°C</p> <p>DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):-10° C to 55° C (14° F to 131° F)</p>
<p>Working Humidity</p>	<p>10% to 90%</p>

<p>Chassis</p>	<p>DS-7616NXI-I2/16P/S:1U chassis DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):1U chassis DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):1U</p>
<p>Dimension (W × D × H)</p>	<p>DS-7616NXI-I2/16P/S:385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):385 × 317 × 52 mm (15.2"× 12.5" × 2.0") DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):385 × 315 × 52 mm (11.6"× 9.5" × 1.6")</p>
<p>Weight</p>	<p>DS-7616NXI-I2/16P/S:≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):≤ 2.5 kg (without HDD, 5.5 lb.) DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道 /8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配):≤ 3 kg (6.6 lb)</p>


Certification	
Obtained Certification	DS-7616NXI-I2/16P/S:CE, CB, REACH, WEEE, UKCA, LOA DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA
CE	DS-7616NXI-I2/16P/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 DS-7616NXI-I2/16P/S(标配)(C),DS-7616NXI-I2/16P/S(中性)(C),DS-7616NXI-I2/16P/S(标配)(C)/美分渠道,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/2T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/12T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/6T,DS-7616NXI-I2/16P/S(标配)(C)/阿联酋HYVISION,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/4T,DS-7616NXI-I2/16P/S(标配)(C)/美分渠道/8T,DS-7616NXI-I2/16P/S(中性),DS-7616NXI-I2/16P/S(标配): DS-7616NXI-I2/16P/S(标配)(E),DS-7616NXI-I2/16P/S(中性)(E):EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

Physical Interface

No.	Description	No.	Description
1	PoE interfaces	6	ALARM IN/OUT
2	LAN network interface	7	USB interface and VIDEO OUT
3	AUDIO IN/AUDIO OUT	8	GND
4	HDMI interface	9	Power supply
5	VGA interface	10	Power switch

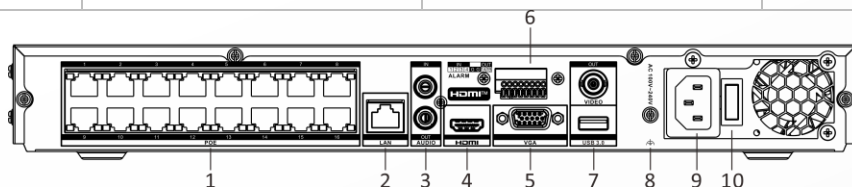

Dimension

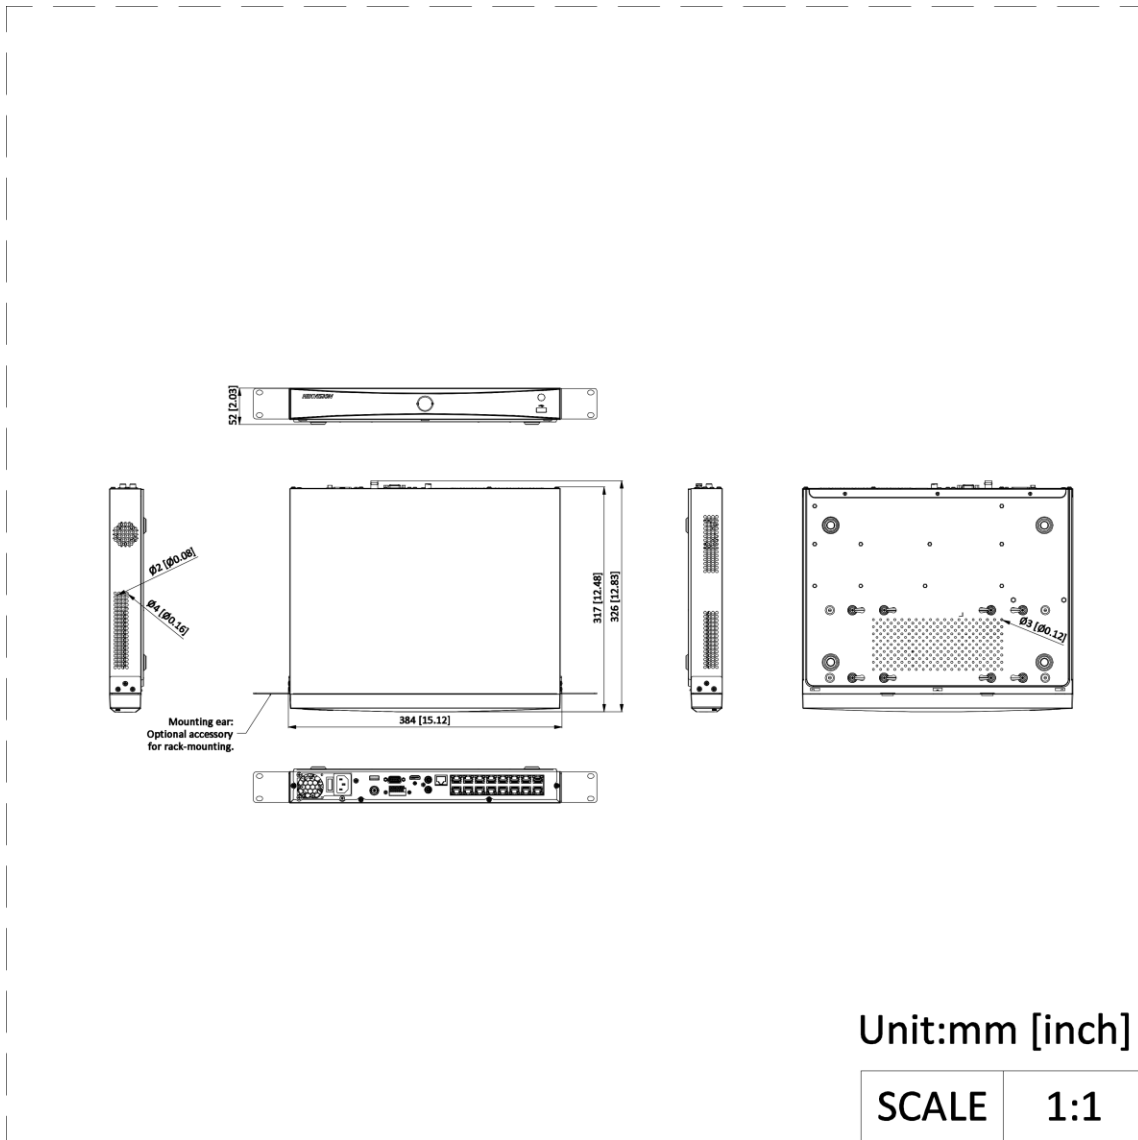

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

