

DS-9616NXI-I8/S 16-ch 2U 4K AcuSense NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 1-ch facial recognition for video stream, or up to 4-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 16-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

**Compression and Recording*

- * H.265+ compression effectively reduces the storage space by up to 75%
- * Full channel IP cameras connection
- * Compatible to third-party network cameras

**HD Video Output*

- * Provide independent HDMI and VGA outputs
- * HDMI video output at up to 4K resolution

**Storage and Playback*

- * Up to 8 SATA interfaces for HDD connection
- * 16-ch synchronous playback

**Smart & POS Function*

- * Support multiple VCA (Video Content Analytics) events
- * Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- * POS information overlay on live view and playback
- * POS triggered recording and alarm

**Network & Ethernet Access*

- * 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- * Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

▪ Specification

Intelligent Analytics	
AI by NVR	<p>DS-9616NXI-I8/S: Facial recognition, perimeter protection, motion detection 2.0</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): N/A</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): Facial recognition, perimeter protection, motion detection 2.0</p>
AI by Camera	<p>DS-9616NXI-I8/S: Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): N/A</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA</p>
Engine	<p>DS-9616NXI-I8/S: 1, engine mode is adjustable</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): N/A</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): 1, engine mode is adjustable</p>
Perimeter Protection	
Human/Vehicle Analysis	<p>DS-9616NXI-I8/S: Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition;</p> <p>Up to 12 rules in total</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): N/A</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition;</p> <p>Up to 12 rules in total</p>
By NVR	<p>DS-9616NXI-I8/S: 4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;</p> <p>Up to 12 rules in total</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): N/A</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): 4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm;</p> <p>Up to 12 rules in total</p>
By Camera	<p>DS-9616NXI-I8/S: All channels</p> <p>DS-9616NXI-I8/S(标配)(C), DS-9616NXI-I8/S(中性)(C): N/A</p> <p>DS-9616NXI-I8/S(标配)(E), DS-9616NXI-I8/S(中性)(E): All channels</p>
Facial Recognition	
Facial Detection and Analytics	<p>DS-9616NXI-I8/S: Face picture comparison, human face capture, face picture search</p> <p>Face picture comparison, human face capture, face picture search</p>

Face Picture Library	<p>DS-9616NXI-I8/S:Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 15KB, total capacity ≤ 150 MB)</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 15KB, total capacity ≤ 150 MB)</p>
Facial Detection and Analytics Performance	<p>DS-9616NXI-I8/S:1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)</p>
Face Picture Comparison	<p>DS-9616NXI-I8/S:4-ch face picture comparison alarm</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):8-ch</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):4-ch face picture comparison alarm</p>
Motion Detection 2.0	
Human/Vehicle Analysis	<p>DS-9616NXI-I8/S:16-ch</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):N/A</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):16-ch</p>
By NVR	<p>DS-9616NXI-I8/S:All channels for Hikvision cameras</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):All channels for Hikvision cameras</p>
By Camera	<p>DS-9616NXI-I8/S:All channels</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):All channels</p>

ANPR	
By Camera	<p>DS-9616NXI-I8/S:All channels</p> <p>Support Countries & Regions:</p> <ol style="list-style-type: none"> 1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia 2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein 3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon 4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):All channels</p>
Vehicle Attributes	<p>DS-9616NXI-I8/S:Vehicle brand, vehicle color, vehicle type</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Plate number, license plate color, license plate type</p>
Plate Attributes	<p>DS-9616NXI-I8/S:Plate number, license plate color, license plate type</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Vehicle brand, vehicle color, vehicle type</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p>
Video and Audio	
IP Video Input	<p>DS-9616NXI-I8/S:16-ch</p> <p>Up to 12 MP resolution</p> <p>*: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):16-ch</p> <p>Up to 12 MP resolution</p> <p>*: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):16-ch</p>
Incoming Bandwidth	<p>DS-9616NXI-I8/S:320 Mbps</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):320 Mbps</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):160 Mbps</p>

Outgoing Bandwidth	256 Mbps
HDMI 1 Output	DS-9616NXI-I8/S:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
HDMI 2 Output	DS-9616NXI-I8/S:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA 1 Output	DS-9616NXI-I8/S:1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1920 × 1080/60 Hz
VGA 2 Output	DS-9616NXI-I8/S:1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1920 × 1080/60 Hz
Video Output Mode	DS-9616NXI-I8/S:HDMI1/VGA simultaneous output, HDMI2/VGA independent output DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):HDMI1/VGA simultaneous output, HDMI2/VGA independent output DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):HDMI1/VGA1 simultaneous output, HDMI2/VGA2 simultaneous output,HDMI1/HDMI2 independent output
CVBS Output	DS-9616NXI-I8/S:1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	DS-9616NXI-I8/S:2-ch, RCA (Linear, 1 KΩ) DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):2-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)

Decoding	
Recording Resolution	DS-9616NXI-I8/S:32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs. DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.
Live View Window Division	DS-9616NXI-I8/S:1/2/4/6/8/9/16 DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1/2/4/6/8/9/16 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A
Aux Port Window Division	DS-9616NXI-I8/S:1/2/4/6/8/9/16 DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1/2/4/6/8/9/16 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A
Dual-Stream Recording	DS-9616NXI-I8/S:Support DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Support
Audio Compression	DS-9616NXI-I8/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Decoding Format	DS-9616NXI-I8/S:H.265+/H.265/H.264+/H.264/MPEG4 DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):H.265+/H.265/H.264+/H.264 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):H.265+/H.265/H.264+/H.264/MPEG4
Decoding Capability	DS-9616NXI-I8/S:16-ch@1080p (30 fps) DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):16-ch@1080p (30 fps) DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps)
Synchronous Playback	16-ch
Stream Type	Video, Video & Audio
Network	
API	DS-9616NXI-I8/S:ONVIF (profileS/G); SDK; ISAPI DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):ONVIF (profileS/G); SDK; ISAPI


Compatible Browser	DS-9616NXI-I8/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Protocol	DS-9616NXI-I8/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Remote Connection	128
Network Interface	DS-9616NXI-I8/S:2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Camera Access Protocol	ONVIF(Version 2.5), RTSP
RAID	
RAID Type	DS-9616NXI-I8/S:RAID0, RAID1, RAID5, RAID6, RAID10 RAID and AI functions are mutually exclusive. DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):RAID0, RAID1, RAID5, RAID6, RAID10 Support global hot spare DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):RAID0, RAID1, RAID5, RAID6, RAID10
Auxiliary Interface	
SATA	8 SATA interfaces
eSATA	1 eSATA interface
Capacity	DS-9616NXI-I8/S:Up to 16 TB capacity for each disk DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Up to 14 TB capacity for each disk DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):Up to 10 TB capacity for each disk
Serial Interface	DS-9616NXI-I8/S:RS-485 (full-duplex), RS-232, Keyboard DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):RS-485 (full-duplex), RS-232, Keyboard DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):1 RS-485 (full-duplex), 1 RS-232
USB Interface	DS-9616NXI-I8/S:Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm In/Out	DS-9616NXI-I8/S:16/8 DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):16/9 DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):16/8

Ctrl 12V	<p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):NA</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered.</p> <p>*: The Ctrl 12V power is controlled by alarm output 9.</p>
DC 12V	<p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):12 VDC, 1 A power output</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):NA</p>
General	
GUI Language	<p>DS-9616NXI-I8/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):N/A</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew</p>
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	<p>DS-9616NXI-I8/S:≤ 30 W</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):≤ 30 W</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):≤ 30 W (without HDD)</p>
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Chassis	2U chassis
Dimension (W × D × H)	<p>DS-9616NXI-I8/S:442 × 459 × 92 mm (17.4"× 18" × 3.6")</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):445 × 460 × 93 mm (17.5"× 18.1" × 3.7")</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):442 × 459 × 92 mm (17.4"× 18" × 3.6")</p>
Weight	<p>DS-9616NXI-I8/S:≤ 8.7 kg (19.2 lb.)</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):≤ 8.3 kg (18.3lb.)</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):≤ 8.7 kg (19.2 lb.)</p>
Certification	
FCC	<p>DS-9616NXI-I8/S:Part 15 Subpart B, ANSI C63.4-2014</p> <p>DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):N/A</p> <p>DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):Part 15 Subpart B, ANSI C63.4-2014</p>


CE	DS-9616NXI-I8/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
Obtained Certification	DS-9616NXI-I8/S:CE, FCC, IC DS-9616NXI-I8/S(标配)(C),DS-9616NXI-I8/S(中性)(C):CE, FCC, IC DS-9616NXI-I8/S(标配)(E),DS-9616NXI-I8/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA

Physical Interface

No.	Description	No.	Description
1	eSATA interface	8	USB 3.0 interface
2	LAN1/LAN2 interface	9	ALARM IN
3	AUDIO IN/OUT	10	ALARM OUT, RS-485, Ctrl 12 V and DC 12 V
4	AUDIO/VIDEO OUT	11	GND
5	HDMI1/HDMI2 interface	12	100 to 240 VAC power supply
6	VGA1/VGA2 Interface	13	Power switch
7	RS-232 interface		

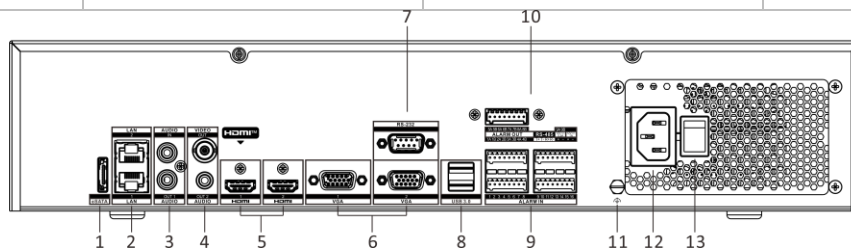

Dimension

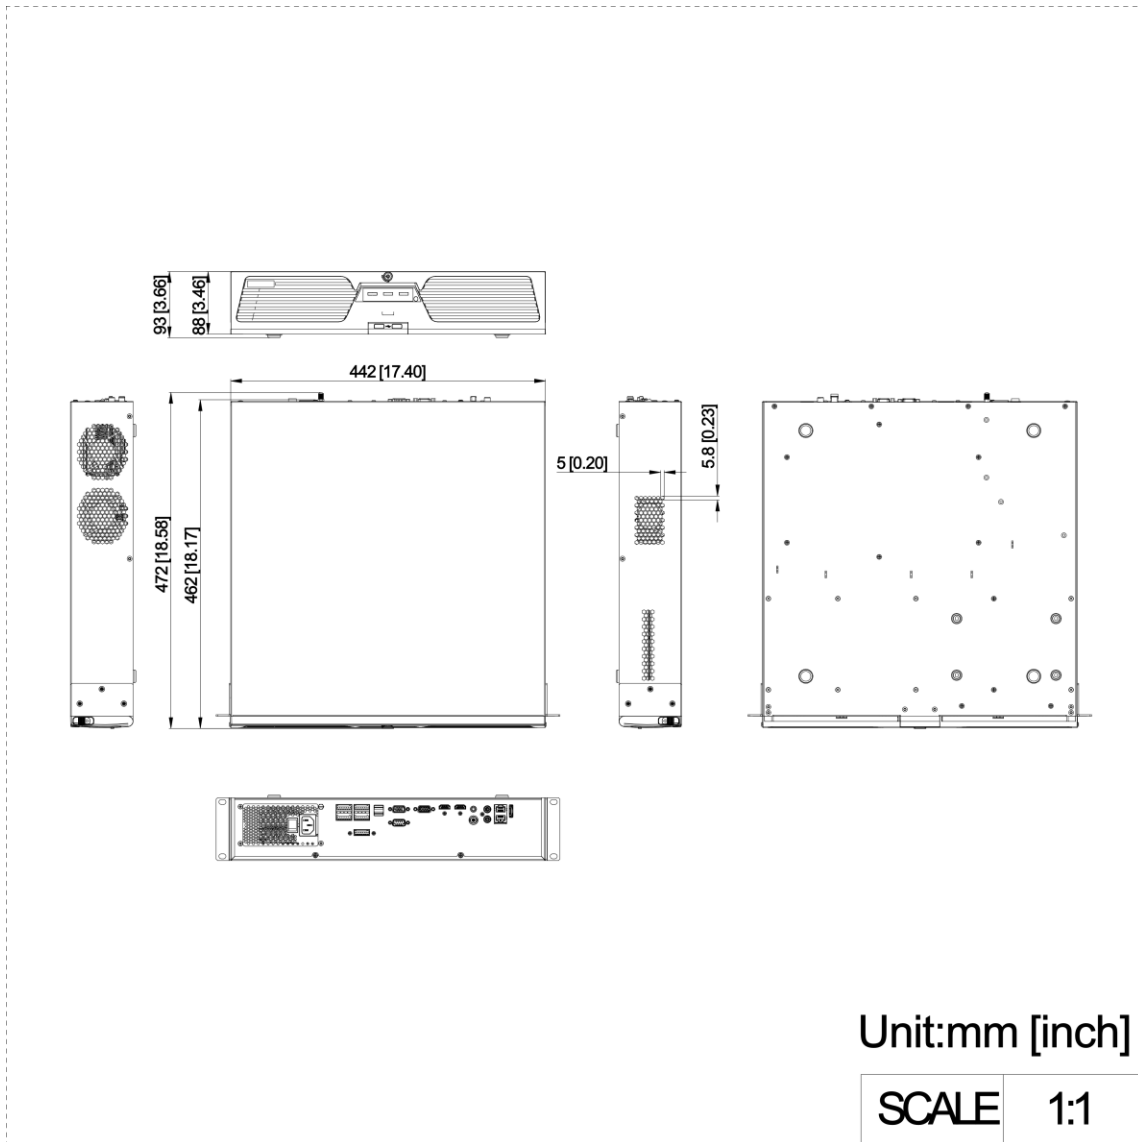

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

