

DS-9664NXI-I8/S(E) 64-ch 2U 4K AcuSense NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 64-ch IP camera inputs
- Up to 320 Mbps incoming bandwidth
- Up to 32-ch 1080p decoding capability

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%

- Full channel IP cameras connection

HD Video Output

- Provide independent HDMI and VGA outputs

- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 8 SATA interfaces for HDD connection

- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events

- Smart search for the selected area in the video, and smart playback to improve the playback efficiency

- POS information overlay on live view and playback

- POS triggered recording and alarm

Network & Ethernet Access

- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces

- Hik-Connect for easy network management

▪ Specification

Intelligent Analytics	
AI by NVR	Facial recognition, perimeter protection, motion detection 2.0, AcuSearch
AI by Camera	Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA
Engine	1, engine mode is adjustable
AcuSearch	
Performance	If the cameras support Hikvision AcuSense Technology and have enabled AcuSearch function, the NVR supports AcuSearch in all channels, capable of modeling 172,800 targets/day.
Perimeter Protection	
By NVR	4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total
By Camera	All channels
Target Recognition	
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Picture Library	Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB)
Facial Detection and Analytics Performance	4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Face Picture Comparison	8-ch
Motion Detection 2.0	
By NVR	All channels for Hikvision cameras
By Camera	All channels
ANPR	
By Camera	All channels Support Countries & Regions: - Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia - Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein - Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon - Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya


Vehicle Attributes	Plate number, license plate color, license plate type
Plate Attributes	Vehicle brand, vehicle color, vehicle type
Devices and Servers	
Heat Map Cameras	heatmap data record and presentation
Video and Audio	
IP Video Input	64-ch Up to 32 MP resolution *: The NVR supports up to 4-ch 32/24/16 MP IP video inputs.
Incoming Bandwidth	384 Mbps
Outgoing Bandwidth	256 Mbps
HDMI 1 Output	4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
HDMI 2 Output	4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz
VGA 1 Output	1920 × 1080/60 Hz
VGA 2 Output	1920 × 1080/60 Hz
Video Output Mode	HDMI1/VGA1 simultaneous output, HDMI2/VGA2 simultaneous output, HDMI1/HDMI2 independent output
CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio Output	2-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Decoding	
Recording Resolution	32 MP/24 MP/16MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32/24/16 MP IP video inputs, all channels for less than 16 MP.
Live View Window Division	1/2/4/6/8/9/16/25/32/36/64
Aux Port Window Division	1/2/4/6/8/9/16/25/32/36
Dual-Stream Recording	Support
Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Decoding Format	H.265+/H.265/H.264+/H.264
Decoding Capability	Enable AI by NVR: 20-ch@1080p (30 fps) 1-ch@32 MP (30 fps); 1-ch@24 MP (30 fps); 2-ch@16MP (30 fps); 3-ch@12MP (30 fps); 5-ch@8 MP (30 fps); 6-ch@6 MP (30 fps); 8-ch@5 MP (30 fps); 10-ch@4 MP (30 fps); 20-ch@2 MP (30 fps); Disable AI by NVR: 32-ch@1080p (30 fps) 2-ch@32 MP (30 fps); 2-ch@24 MP (30 fps); 4-ch@16MP (30 fps); 5-ch@12MP (30 fps); 8-ch@8 MP (30 fps); 10-ch@6 MP (30 fps); 12-ch@5 MP (30 fps); 16-ch@4 MP (30 fps); ; 32-ch@2 MP (30 fps);
Synchronous Playback	16-ch
Stream Type	Video, Video & Audio
Network	
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Remote Connection	128
Network Interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface

Camera Access Protocol	ONVIF(Version 2.5), RTSP
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, RAID10 Support global hot spare
Auxiliary Interface	
SATA	8 SATA interfaces
eSATA	1 eSATA interface
Capacity	Up to 16 TB capacity for each disk
Serial Interface	1 RS-485 (full-duplex), 1 RS-232
USB Interface	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0
Alarm In/Out	16/9
Ctrl 12V	Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	12 VDC, 1 A power output
General	
GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 30 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Chassis	2U chassis
Dimension (W × D × H)	445 × 460 × 93 mm (17.5" × 18.1" × 3.7")
Weight	≤ 8.3 kg (18.3lb.)
Certification	
FCC	N/A
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
Obtained Certification	CE, CB, REACH, WEEE, UKCA, LOA
Cyber Security	
EN 303645	Support
Secure Boot	Support
Secure Component Verification SVC	Support
Password Protection	Support
IP & MAC Address Filtering	Support
HTTPS Encryption	Support
Live View & Playback Stream Encryption	Support : AES128
IEEE802.1X(EAP-TLS) Network Access Control	Support
Signed Firmware	Support


Others	Digest authentication: Support User access log : Support Centralized certificate management : Support Brute force delay protection : Support
--------	---

▪ Physical Interface

No.	Description	No.	Description
1	eSATA interface	8	USB 3.0 interface
2	LAN1/LAN2 interface	9	ALARM IN
3	AUDIO IN/OUT	10	ALARM OUT, RS-485, Ctrl 12 V and DC 12 V
4	AUDIO/VIDEO OUT	11	GND
5	HDMI1/HDMI2 interface	12	100 to 240 VAC power supply
6	VGA1/VGA2 Interface	13	Power switch
7	RS-232 interface		

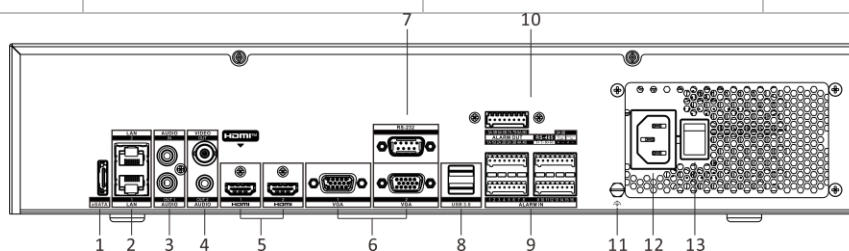

▪ Dimension

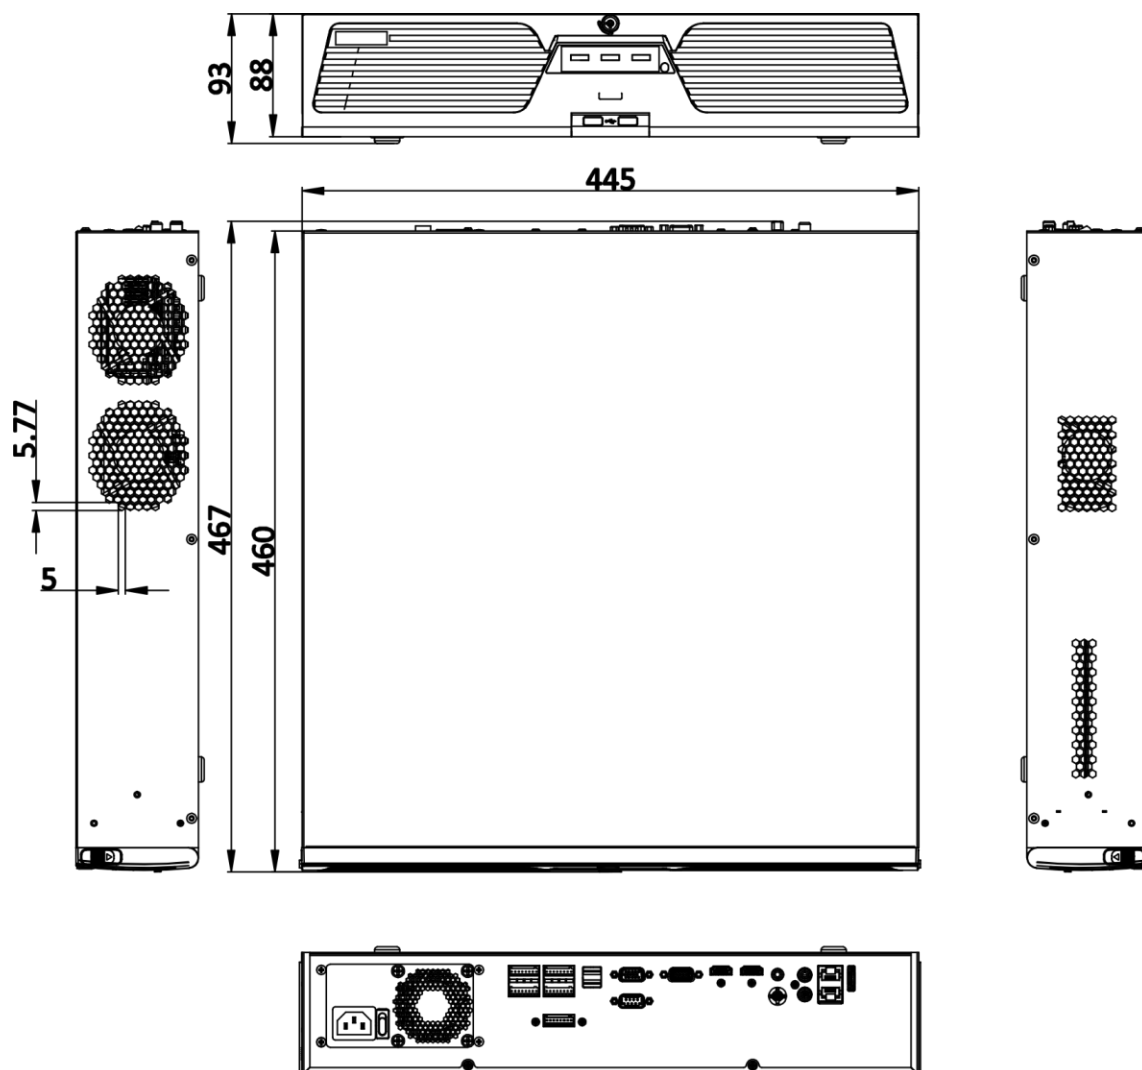

scale/1:1;Unit/mm

▪ Accessory

See Far, Go Further



www.hikvision.com
support@hikvision.com

