

DS-2CFS04/4G
4MP 24/7 Solar 4G Camera

Hikvision Solar Camera supports AOV mode, ultra-low power consumption, 24/7 video recording. The package contains solar panel and lithium battery, so it requires NO network or power cables. It is ideal for outdoor HD surveillance of small businesses and private properties, as well as close-range surveillance of roads, parks, estates, farms, plantations, construction sites, etc.

- Support AOV Mode : 24/7 video recording
- 8 W solar panel and 9000 mAh battery
- Support 4G LTE data transmission
- Smart Hybrid Light: 30 m white light and IR
- Motion Detection 2.0: Support person and vehicle detection
- Built-in microphone and speaker, support two-way audio
- Water and dust resistant (IP66)

▪ Specification

| Camera | |
|-----------------------------|--|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. Illumination | Color: 0.005 Lux @ (F1.6, AGC ON) |
| Max. Resolution | 2560 × 1440 |
| Shutter Time | 1/3 s to 1/100,000 s |
| Day & Night | IR cut filter |
| Angle Adjustment | Pan: 0° to 360°, tilt: 0° to 180°, rotate: 0° to 360° |
| Lens | |
| Focal Length & FOV | 2.8 mm, horizontal FOV 98.5°, vertical FOV 53.1°, diagonal FOV 115.9° 4 mm, horizontal FOV 78.3°, vertical FOV 42.8°, diagonal FOV 91.2 |
| Lens Type | DS-2CFS04/4G: Fixed focal lens, 2.8 and 4 mm optional Fixed focal lens, 2.8 and 4 mm optional |
| Aperture | F1.6 |
| Lens Mount | M12 |
| Iris Type | Fixed |
| Depth of Field | 2.8 mm: 1.4 m to ∞ 4 mm: 1.4 m to ∞ |
| DORI | |
| DORI | DS-2CFS04/4G: Fixed lens: 2.8mm D: 63.4 m, O: 25.2 m, R: 12.7 m, I: 6.3 m 4mm D: 78.0 m, O: 31 m, R: 15.6 m, I: 7.8 m Fixed lens: 2.8mm D: 63.4 m, O: 25.2 m, R: 12.7 m, I: 6.3 m 4mm D: 78.0 m, O: 31 m, R: 15.6 m, I: 7.8 m |
| Illuminator | |
| Supplement Light Type | IR, White Light |
| Supplement Light Range | Up to 30 m |
| IR Wavelength | 850 nm |
| Smart Supplement Light | Yes |
| Video | |
| Main Stream | 50 Hz: 12.5 fps (2560 × 1440, 1920 × 1080, 1280 × 720) 60 Hz: 15 fps (2560 × 1440, 1920 × 1080, 1280 × 720) |
| Video Compression | Main stream: H.265 |
| Video Bit Rate | 32 Kbps to 8 Mbps |
| H.265 Type | Main Profile |
| Bit Rate Control | CBR, VBR |
| Audio | |
| Audio Compression | G.711ulaw |
| Audio Bit Rate | 64 Kbps (G.711ulaw/G.711alaw) |
| Audio Sampling Rate | 8 kHz/16 kHz |
| Environment Noise Filtering | Yes |
| Network | |
| Simultaneous Live View | Up to 6 channels |
| API | ISAPI, SDK |

| | |
|----------------------------------|--|
| User/Host | Up to 32 users 3 user levels: administrator, operator, and user |
| Client | Hik-Connect |
| Mobile Communication | |
| Standard | LTE-TDD |
| Frequency | EU:LTE-FDD: B1/3/5/7/8/20/28 LA:LTE-FDD: B2/3/4/5/7/8/28/66 |
| Uplink and Downlink Data Rate | Cat 1, uplink: 5.1 Mbps, downlink: 10.3 Mbps |
| SIM Card Type | Nano SIM |
| Image | |
| Image Settings | brightness,contrast,white balance,saturation,sharpness |
| Day/Night Switch | Day,Night,Auto,Schedule |
| Image Enhancement | BLC,HLC,3D DNR |
| Wide Dynamic Range (WDR) | Digital WDR |
| Interface | |
| On-Board Storage | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB |
| Reset Key | Yes |
| Built-in Microphone | Yes,1 built-in microphone |
| Built-in Speaker | Yes, 1 built-in speaker |
| Event | |
| Basic Event | Motion detection (support alarm triggering by specified target types (human and vehicle)) |
| Linkage | notify surveillance center,trigger recording,trigger capture,audible warning,Upload to memory card |
| General | |
| Power | 5 V, 2 A |
| Material | Plastic |
| Dimension | Ø81.6 mm × 221.3 mm (Ø3.2" × 8.7") |
| Package Dimension | 320 mm × 228 mm × 148 mm (12.6" × 9.0" × 5.8") |
| Weight | Approx. 480 g (1.1 lb.) |
| With Package Weight | Approx. 1540 g (3.4 lb.) |
| Startup and Operating Conditions | 0 °C to 50 °C (32 °F to 122 °F). Humidity 95% or less (non-condensing) |
| Storage Conditions | -20 °C to 25 °C (-4 °F to 77 °F). Humidity 70% or less (non-condensing) |
| General Function | mirror,flash log |
| Flashing Light | Yes |
| Battery | |
| Battery Type | Lithium |
| Capacity | 9000 mAh (3.7 V) |
| Max. Charging Voltage | 8.4 V |
| Battery Voltage | 6 V to 8.4 V |
| Operating Temperature | Charging: 0°C to 45°C (32°F to 113°F) Discharging: -20°C to 55°C (-4°F to 131°F) |
| Cycle Lifetime | Cap(800th)≥80% |

| Approval | |
|---------------------------------|---|
| RF | CE-RED: EN 301489-1 V2.1.1(BT or 2.4G); EN 301489-17 V3.1.1(BT or 2.4G); EN 300328 V2.1.1(BT or 2.4G); EN 62311:2008(BT or 2.4G) |
| EMC | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 50121-4:2016+A1:2019 |
| Safety | CB: IEC 62368-1:2014+A11, CE-LVD: EN 62368-1:2014/A11:2017 |
| Environment | CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006 |
| Protection | IP66:IEC 60529-2013 |
| Solar Power | |
| Solar Panel Type | Monocrystalline silicon solar panel |
| Power Consumption | 8 W |
| Solar Panel Dimensions & Weight | 263.8 × 171.7 × 18.5 mm / 450 g |
| Working Temperature | -40°C to 85°C (-40°F to 185°F) |
| Protection | IP65 |

**Pro Solar-powered Security Camera Setup*

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

| Level | Description |
|------------------------|--|
| .Top-level protection | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more. |
| Moderate protection | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed. |

▪ Available Model

DS-2CFS04/4G(4mm)/LA

DS-2CFS04/4G(2.8mm)/LA


DS-2CFS04/4G-SIM(2.8mm)(MEX SYSCOM)

DS-2CFS04/4G(2.8mm)

DS-2CFS04/4G(4mm)


DS-2CFS04/4G-SIM(2.8mm)(HIK CHI)

▪ Dimension

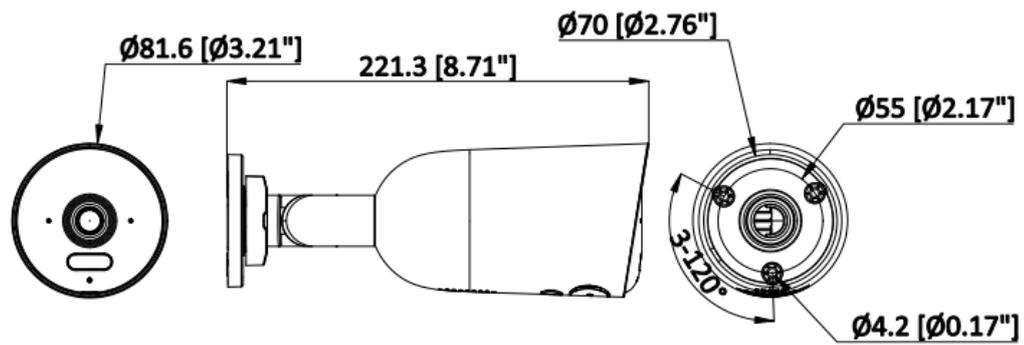


Unit:mm [inch]

| | |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

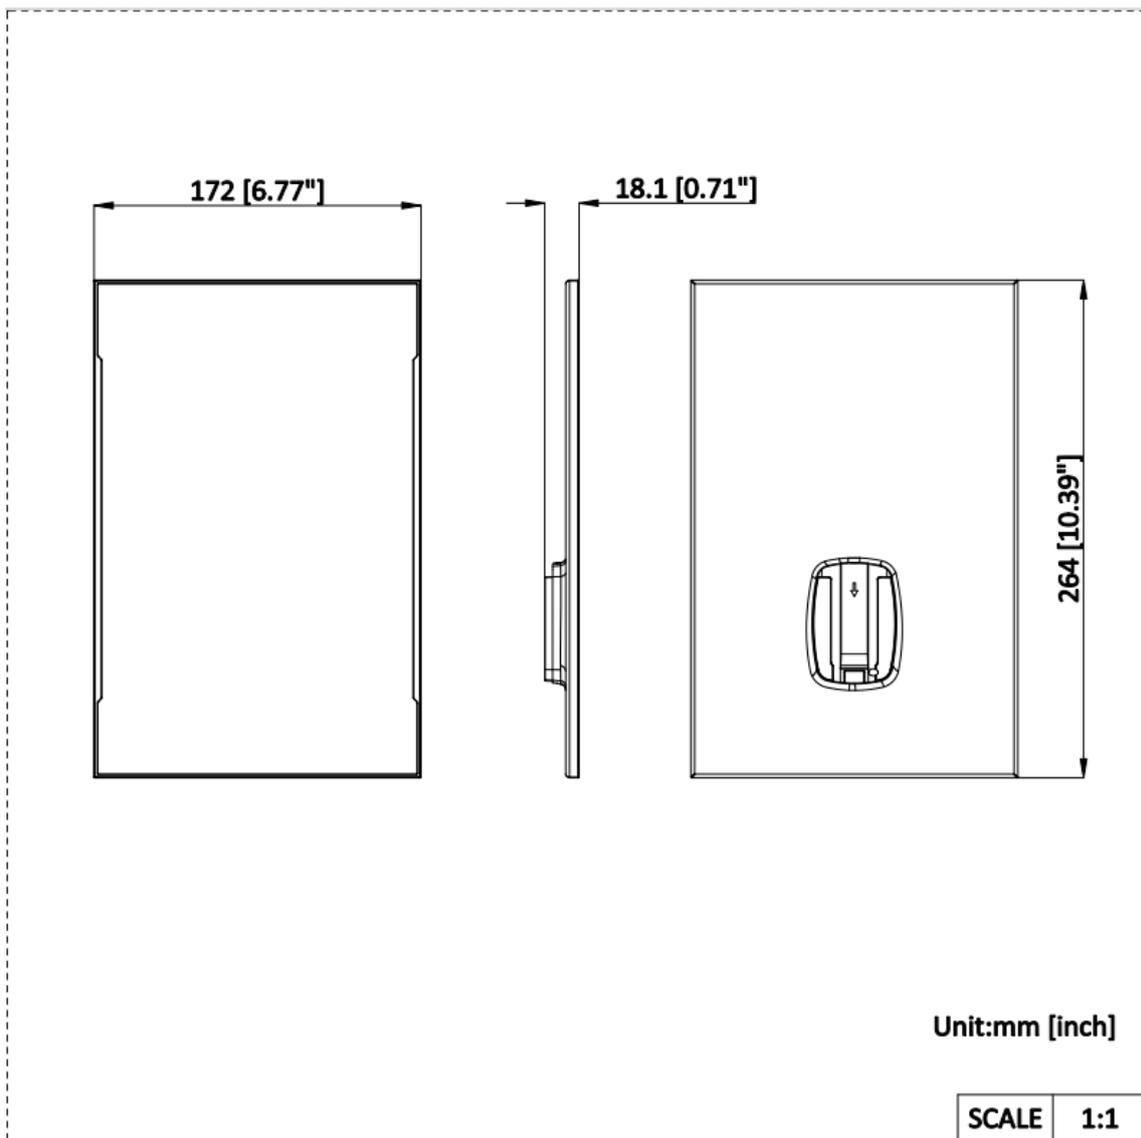

Unit:mm [inch]

| | |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

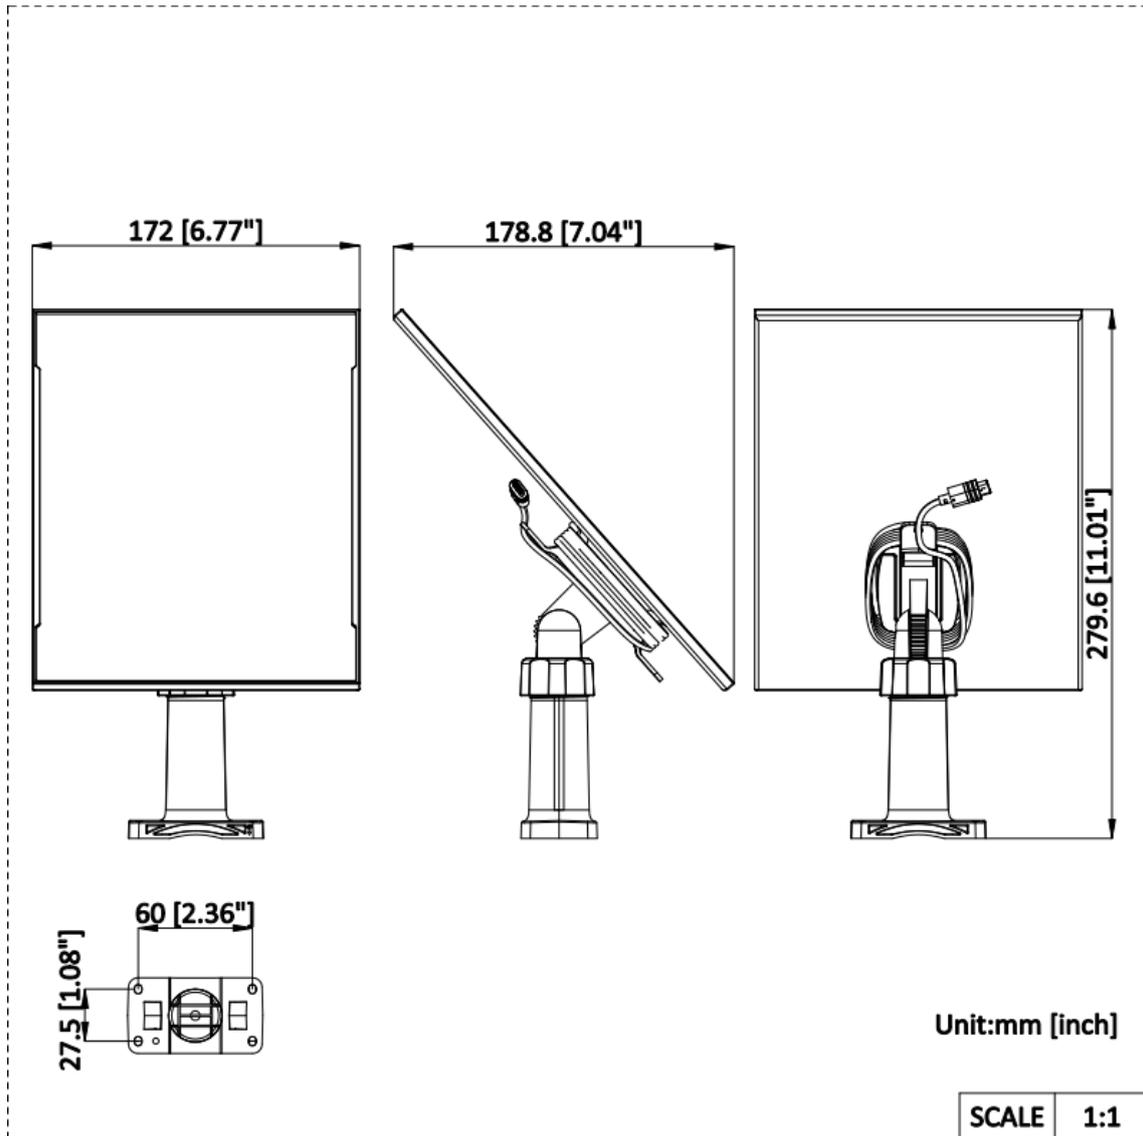

▪ Accessory

▪ Optional

| DS-1276ZJ | DS-1276ZJ-SUS | DS-1275ZJ-SUS |
|-----------|---------------|---------------|
| | | |

See Far, Go Further



www.hikvision.com
support@hikvision.com

