

DS-7104NI-S2/WX 4-ch Mini Wi-Fi NVS Upgraded version




- Equipped with Wi-Fi 6 hotspot, one-click to add wireless IP camera
- Dual High-gain antenna design for stable camera connection
- Compatible with Micro SD cards, up to 512 GB for each card
- Through the HC App, initialization configurations such as scanning and adding devices, formatting storage media, and adding IP camera with just one-click are completed, enabling remote preview and playback, channel intercom, pan tilt control, and other operations
- Through the HC App, device sharing, channel management, storage media management, recording plan settings, message settings, video encryption, and other configurations can be performed

▪ Specification

Video and Audio	
IP Video Input	4-ch
Incoming Bandwidth	20 Mbps
Outgoing Bandwidth	20 Mbps
Decoding	
Stream Type	Video, Video & Audio
Recording Resolution	6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Network	
Network Interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Wireless Parameter	
Frequency Band	2.4 GHz
Antenna Structure	Dual high gain antenna
Transmission Speed	573Mbps
Transmission Standard	IEEE 802.11a/b/g/n/ac/ax
Auxiliary Interface	
Micro SD	2 slots, up to 512GB for each card
General	
Power Supply	12 VDC, 1 A
Consumption	≤ 6 W
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10 to 90 %
Dimension (W × D × H)	163 x 125 x 24 mm (6.4" × 4.9" × 0.9")
Weight	≤ 500 g (1.1 lb)
Others	
SD Card Indicator	Solid on: SD card is detected; Solid off: No SD card is detected; Flickering: There is data transmission
Power Indicator	Solid on: Device is powered up; Solid off: Device is powered off or power supply exception occurs; Flickering: Device is being restored
Online Indicator	Solid on: Network is connected; Solid off: Network is disconnected or network exception occurs
Wi-Fi Indicator	Solid on: Wi-Fi is initializing or there is no data transmission through Wi-Fi; Solid off: Wi-Fi exception occurs; Flickering slowly (on for 2 sec and off for 2 sec): Wi-Fi is initialized and there is data transmission through Wi-Fi

▪ Physical Interface

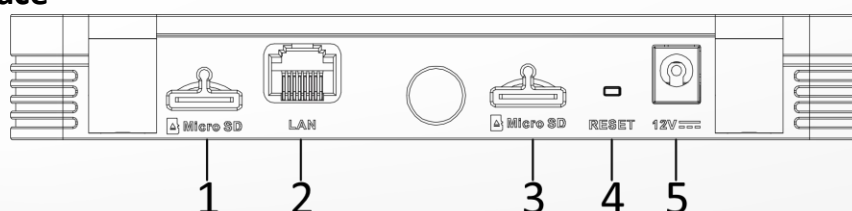

No.	Description	No.	Description
1	Micro SD card	4	Reset button


	interface		
2	LAN network interface	5	Power supply
3	Micro SD card interface		

▪ Available Model

DS-7104NI-S2/WX(STD)

DS-7104NI-S2/WX(NEU)

▪ Dimension

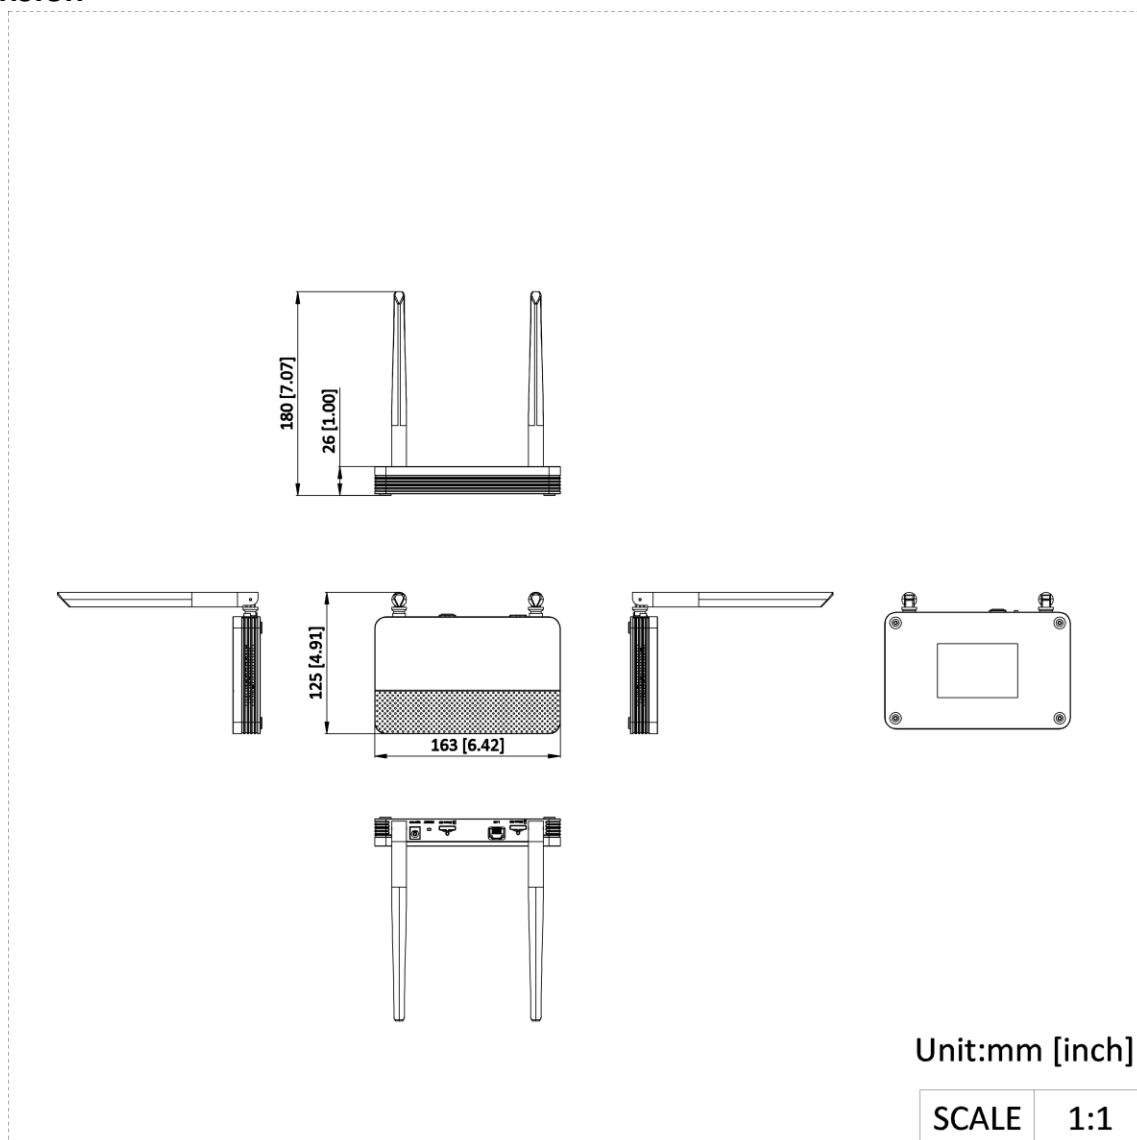

See Far, Go Further



www.hikvision.com
support@hikvision.com

