

## HWI-B129HAA-LU 2 MP ColorVu 3.0 Fixed Bullet Network Camera

ColorVu 3.0



- HikAI-ISP for excellent noise reduction effect
- Super clear 24/7 colorful imaging with ColorVu 3.0 technology
- High quality imaging with 2 MP resolution
- Motion Detection 3.0 supports Human and Vehicle Detection
- Built-in microphone for real-time audio security
- Smart Hybrid Light: advanced technology with long range
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Water and dust resistant (IP67)

## ▪ Specification

| Camera                      |                                                                                                                                   |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                | 1/2.8" Progressive Scan CMOS                                                                                                      |
| Max. Resolution             | 1920 × 1080                                                                                                                       |
| Min. Illumination           | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light                                                                              |
| Shutter Time                | 1 s to 1/100,000 s                                                                                                                |
| Day & Night                 | IR cut filter                                                                                                                     |
| Angle Adjustment            | Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°                                                                              |
| Lens                        |                                                                                                                                   |
| Lens Type                   | Fixed focal lens, 2.8 and 4 mm optional                                                                                           |
| Focal Length & FOV          | 2.8 mm, horizontal FOV 106°, vertical FOV 56°, diagonal FOV 129°<br>4 mm, horizontal FOV 88°, vertical FOV 47°, diagonal FOV 103° |
| Lens Mount                  | M12                                                                                                                               |
| Iris Type                   | Fixed                                                                                                                             |
| Aperture                    | F1.0                                                                                                                              |
| Depth of Field              | 2.8 mm: 1.2 m to ∞<br>4 mm: 1.3 m to ∞                                                                                            |
| DORI                        |                                                                                                                                   |
| DORI                        | 2.8 mm, D: 44 m, O: 17 m, R: 8 m, I: 4 m<br>4 mm, D: 53 m, O: 21 m, R: 10 m, I: 5 m                                               |
| Illuminator                 |                                                                                                                                   |
| Supplement Light Type       | IR, White Light                                                                                                                   |
| Supplement Light Range      | Up to 30 m                                                                                                                        |
| Smart Supplement Light      | Yes                                                                                                                               |
| IR Wavelength               | 850 nm                                                                                                                            |
| Video                       |                                                                                                                                   |
| Main Stream                 | 50 Hz: 25 fps (1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 720)                                                |
| Sub-Stream                  | 50 Hz: 25 fps (640 × 480, 640 × 360)<br>60 Hz: 30 fps (640 × 480, 640 × 360)                                                      |
| Video Compression           | Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG                                                             |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                 |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                      |
| H.265 Type                  | Main Profile                                                                                                                      |
| Bit Rate Control            | CBR                                                                                                                               |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                          |
| Region of Interest (ROI)    | 1 fixed region for main stream and sub-stream                                                                                     |
| Audio                       |                                                                                                                                   |
| Audio Type                  | Mono sound                                                                                                                        |
| Audio Compression           | G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/AAC-LC/MP3                                                                            |
| Audio Bit Rate              | 64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 160 Kbps (MP2L2)/16 to 64 Kbps (AAC-LC)/8 to 160 Kbps (MP3)               |
| Audio Sampling Rate         | 8 kHz/16 kHz                                                                                                                      |
| Environment Noise Filtering | Yes                                                                                                                               |

| Network                          |                                                                                                                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocols                        | TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTSP, RTCP, NTP, IPv4, IPv6, IGMP, UDP, QoS, FTP, SMTP                                                                                                                             |
| Simultaneous Live View           | Up to 6 channels                                                                                                                                                                                                       |
| API                              | ONVIF (Profile S, Profile G, Profile T), ISAPI, SDK                                                                                                                                                                    |
| User/Host                        | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                     |
| Security                         | Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address) |
| Client                           | iVMS-4200, Hik-Connect                                                                                                                                                                                                 |
| Web Browser                      | Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Edge 89+, Safari 11<br>Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+                                                                                       |
| Image                            |                                                                                                                                                                                                                        |
| Image Settings                   | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser                                                                                            |
| Day/Night Switch                 | Day, Night, Auto, Schedule                                                                                                                                                                                             |
| Wide Dynamic Range (WDR)         | 120 dB                                                                                                                                                                                                                 |
| SNR                              | ≥ 52 dB                                                                                                                                                                                                                |
| Image Enhancement                | BLC, HLC, 3D DNR                                                                                                                                                                                                       |
| Privacy Mask                     | 4 programmable rectangular privacy masks                                                                                                                                                                               |
| Interface                        |                                                                                                                                                                                                                        |
| Ethernet Interface               | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                          |
| On-Board Storage                 | NA                                                                                                                                                                                                                     |
| Built-in Microphone              | Yes, 1 built-in microphone                                                                                                                                                                                             |
| Built-in Speaker                 | NA                                                                                                                                                                                                                     |
| Reset Key                        | NA                                                                                                                                                                                                                     |
| Event                            |                                                                                                                                                                                                                        |
| Basic Event                      | Motion detection (support alarm triggering by specified target types (person and vehicle)), video tampering alarm, exception                                                                                           |
| Linkage                          | Upload to FTP/memory card, notify surveillance center, send email, trigger recording, trigger capture                                                                                                                  |
| General                          |                                                                                                                                                                                                                        |
| Power                            | 12 VDC ± 25%, 0.55 A, max. 6.6 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, max. 8 W                                                                                        |
| Material                         | Front cover: metal, body: plastic, bracket: plastic                                                                                                                                                                    |
| Dimension                        | 69.1 mm × 66.9 mm × 172.9 mm (2.7" × 2.6" × 6.8")                                                                                                                                                                      |
| Package Dimension                | 216 mm × 121 mm × 118 mm (8.5" × 4.8" × 4.7")                                                                                                                                                                          |
| Weight                           | Approx. 330 g (0.73 lb.)                                                                                                                                                                                               |
| With Package Weight              | Approx. 445 g (0.98 lb.)                                                                                                                                                                                               |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                              |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                              |
| Language                         | English, Russian, Ukrainian, Arabic, Spanish, French, Portuguese, Turkish, Polish, German                                                                                                                              |
| General Function                 | Heartbeat, mirror, flash log, password reset via email, password protection, anti-banding                                                                                                                              |


|                 |                                                                                                                          |
|-----------------|--------------------------------------------------------------------------------------------------------------------------|
| Flashing Light  | NA                                                                                                                       |
| <b>Approval</b> |                                                                                                                          |
| EMC             | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021 |
| Safety          | CB: IEC 62368-1: 2014+A11                                                                                                |
| Environment     | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                         |
| Protection      | IP67: IEC 60529-2013                                                                                                     |

## ▪ Available Model

HWI-B129HAA-LU(2.8mm)

HWI-B129HAA-LU(4mm)

## ▪ Dimension

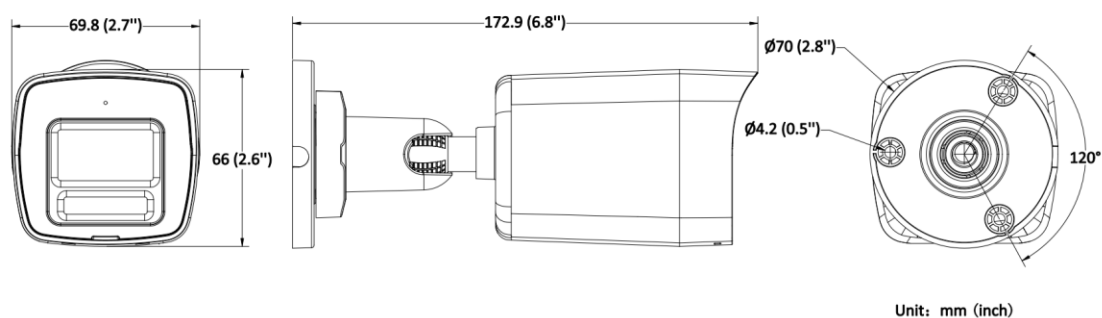


## ▪ Accessory

### ▪ Optional

| DS-1280ZJ-XS                                                                        | DS-1275ZJ-SUS                                                                       | DS-1276ZJ-SUS                                                                         |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |

## ▪ Installation Methods

| Junction Box<br>DS-1280ZJ-XS | Vertical Pole<br>Mounting<br>DS-1275ZJ-SUS+DS-12<br>80ZJ-XS | Corner Mounting<br>DS-1276ZJ-SUS+DS-12<br>80ZJ-XS |
|------------------------------|-------------------------------------------------------------|---------------------------------------------------|
|------------------------------|-------------------------------------------------------------|---------------------------------------------------|

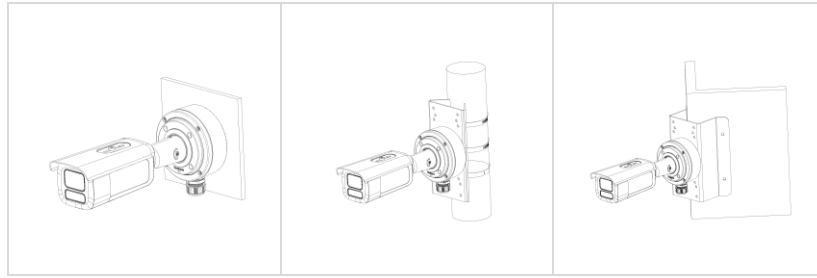

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HiWatch**<sup>TM</sup>