

## DS-UPS1200-R/X UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection





## ▪ Specification

<b>Power</b>	
UPS Capacity	1200 VA / 720 W
<b>Input</b>	
Input Voltage Range	81 VAC to 134VAC (110V) 89 VAC to 145VAC (120V)
Input Frequency	50/60 Hz self-adaptive
Plug Type	Type B (NEMA 5-15)
<b>Output</b>	
Output Voltage Range	110/120VAC ± 10%
Output Frequency	50/60 Hz ± 0.5 Hz self-adaptive
Transfer Time	≤ 10 ms
Waveform	Simulated Sine wave
Outlet Type	Type B (NEMA 5-15)
Outlet Number	Battery outlet*4 & Bypass*2
<b>Battery</b>	
Battery Type	12 V/7 Ah x 2, lead-acid battery
Recharge Time	6-8 hours recover to 90% capacity
Typical Backup Time	Run time at 200w: 20-25 min
<b>Interface</b>	
Communicate Ports	No
<b>Protection</b>	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
<b>Indicator</b>	
Display	LED indicator Line mode: Solid green led lighting Battery mode: Solid yellow led flash Fault mode: Solid red led lighting
Alarm	Battery mode: Sounding every 10 seconds. Low battery : Sounding every second. Over load : Sounding every 0.5 seconds. Fault: Continuously sounding.
<b>General</b>	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	0% to 90% (non-condensing)
Dimension	313.7 mm × 130 mm × 176.8 mm (12.35" × 5.12" × 6.96")
Weight	8.23kg

## ▪ Available Model

DS-UPS1200-R/X

## ▪ Dimension

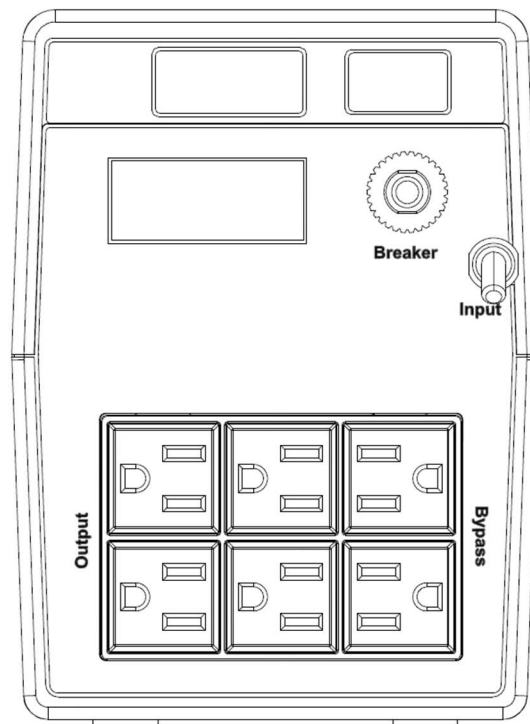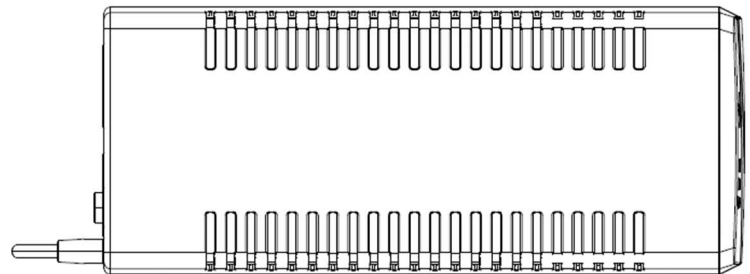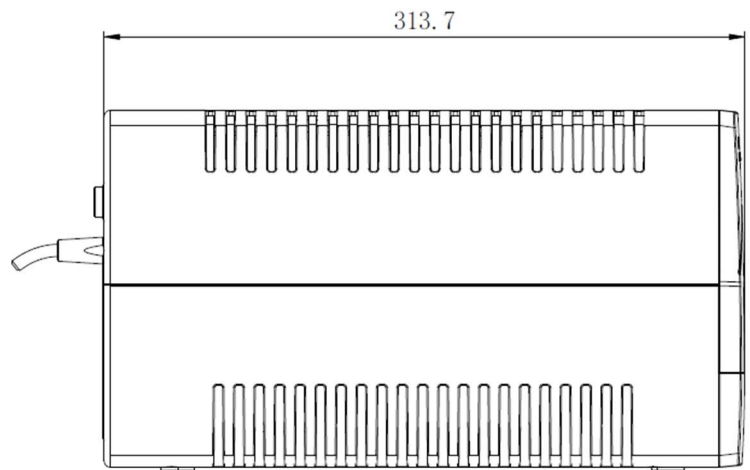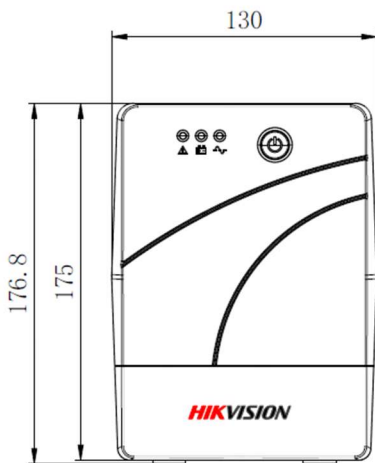

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

