

DS-2CD3746G3T-IZSUY(Black) 4 MP AcuSense Varifocal Dome Network Camera



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- HIK AI-ISP for excellent noise reduction effect
- Scene-adaptive WDR
- Focus on Person and Vehicle classification based on deep learning
- Motorized varifocal lens for easy installation and monitoring
- Anti-corrosion design, providing reliability and longevity compared to standard (NEMA 4X)
- Water and dust resistant (IP67) and vandal resistant (IK10)

▪ Specification

| Model | | DS-2CD3746G3T-IZSUY(2.7-13.5mm)/海外标配/海康黑 |
|-------------|-----------------------------|--|
| Camera | Image Sensor | |
| | Max. Resolution | |
| | Min. Illumination | |
| | Shutter Time | |
| | Day & Night | |
| | Angle Adjustment | |
| Lens | Lens Type | |
| | Focal Length & FOV | |
| | Lens Mount | |
| | Iris Type | |
| | Aperture | |
| | Depth of Field | |
| DORI | DORI | |
| Illuminator | Supplement Light Type | |
| | Supplement Light Range | |
| | Smart Supplement Light | |
| | IR Wavelength | |
| HEOP | Open Resources | |
| | Computing Power | |
| | Open Capability | |
| | Deep Learning Structure | |
| | Programming Language | |
| Video | Main Stream | |
| | Sub-Stream | |
| | Third Stream | |
| | Fourth Stream | |
| | Video Compression | |
| | Video Bit Rate | |
| | H.264 Type | |
| | H.265 Type | |
| | Bit Rate Control | |
| | Scalable Video Coding (SVC) | |
| Audio | Region of Interest (ROI) | |
| | e-PTZ | |
| | Audio Type | |
| | Audio Compression | |
| | Audio Bit Rate | |
| Network | Environment Noise Filtering | |
| | Audio Sampling Rate | |
| | Protocols | |
| | Simultaneous Live View | |
| | API | |

| | | |
|-------------------------------|----------------------------------|--|
| Image | User/Host | |
| | Security | |
| | Network Storage | |
| | Client | |
| | Web Browser | |
| | Image Parameters Switch | |
| | Image Settings | |
| | Day/Night Switch | |
| | Image Enhancement | |
| | SNR | |
| Interface | Wide Dynamic Range (WDR) | |
| | Image Stabilization | |
| | Privacy Mask | |
| | Ethernet Interface | |
| | On-Board Storage | |
| Event | Audio | |
| | Alarm | |
| | Reset Key | |
| | Power Output | |
| | Basic Event | |
| Deep Learning Function | Smart Event | |
| | Linkage | |
| | Face Capture | |
| General | People Counting | |
| | Perimeter Protection | |
| | Power | |
| | Material | |
| | Dimension | |
| Approval | Package Dimension | |
| | Weight | |
| | With Package Weight | |
| | Storage Conditions | |
| | Startup and Operating Conditions | |
| | General Function | |
| | Language | |
| | EMC | |
| | Safety | |
| | Environment | |
| | Protection | |
| | Anti-Corrosion Protection | |

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.


This model has MODERATE PROTECTION.

| Level | Description |
|------------------------|--|
| Top-level protection | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more. |
| Moderate protection | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed. |

▪ Available Model

DS-2CD3746G3T-IZSUY(2.7-13.5)O-STDBLACK

▪ Dimension

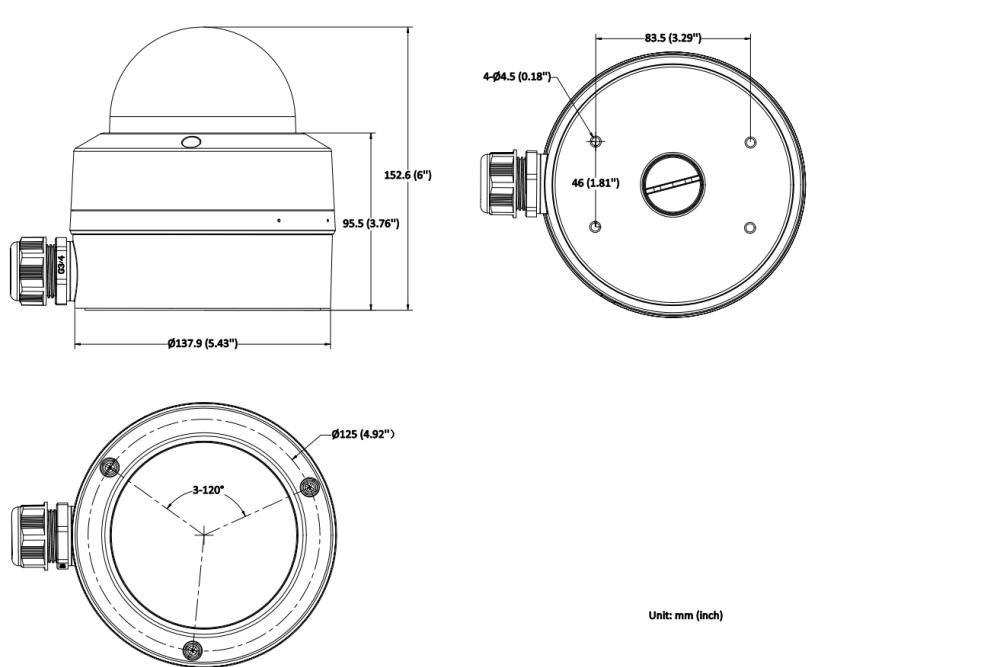

▪ Accessory

▪ Included

DS-1280ZJ-DM45

-Y(Black)

Junction box



▪ **Optional**

| DS-1275ZJ-SUS(Bla ck) Vertical pole mount | DS-1271ZJ-140-DM Pendant Mount | DS-1275ZJ-S-SUS(Black) Vertical pole mount | DS-1273ZJ-140-DM Wall mount | DS-1276ZJ-SUS(Bla ck) Corner mount |
|--|-----------------------------------|---|--------------------------------|---------------------------------------|
| | | | | |
| | | | | |

DS-220AZJ-145-BA

Y
Wall mount

无法显示链接的图像。
该文件可能已被移动、重命名或删除。请验证该链接是否指向正确的文件和位...

-



See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®