

DS-2CD1743G3-LIZSU/SX(BLACK)**4 MP Smart Hybrid Light 3.0 Vari-Focal Dome Network Camera**

- HikAI-ISP for well noise reduction, color correction and image quality improvement
- Motion Detection 3.0 detects persons and vehicles more accurately, reducing false alarms
- Smart Hybrid Light: integrates IR and white lights, 3 supplemental lighting modes
- Built-in microphone for real-time audio security
- -SX: Supports Live Guard (white light & red and blue light) to deter intruders and Two-way Audio via camera and Hik-Connect
- Dust and water resistant (IP67)


▪ Specification

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Max. Resolution	2688 × 1520
Min. Illumination	Color: 0.003 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Shutter Time	1 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Lens	
Lens Type	Varifocal lens, motorized lens, 2.8 to 12 mm
Focal Length & FOV	2.8 to 12 mm, horizontal FOV 93° to 28°, vertical FOV 50° to 16°, diagonal FOV 110° to 33°
Lens Mount	Ø14
Focus	NA
Iris Type	Fixed
Aperture	F1.6
Depth of Field	1.5m to ∞
DORI	
DORI	Wide: D: 67 m, O: 26 m, R: 13 m, I: 6 m Tele: D: 204 m, O: 81 m, R: 40 m, I: 20 m
Illuminator	
Supplement Light Type	IR, White Light
Supplement Light Range	Up to 30 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 25 fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720) 60 Hz: 24 fps (2688 × 1520, 2560 × 1440, 1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1280 × 720 , 640 × 480, 640 × 360) 60 Hz: 24 fps (1280 × 720 , 640 × 480, 640 × 360)
Third Stream	NA
Video Compression	Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR
Scalable Video Coding (SVC)	YES
Region of Interest (ROI)	1 fixed regions for each stream
Target Cropping	NO
Audio	
Audio Type	Mono sound
Audio Compression	-U: G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC
Audio Bit Rate	-U: 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 160 Kbps (MP2L2)/8 to 160 Kbps (MP3)/16 to 64 Kbps (AAC-LC)

Audio Sampling Rate	-U: 8 kHz/16 kHz
Environment Noise Filtering	-U: Yes
Network	
Protocols	DHCP,QoS,FTP,SSL/TLS,ICMP,RTSP,UDP,HTTPS,HTTP,DNS,IPv6,IPv4,IGMP,RTCP,RTP,DDNS,TCP/IP,UPnP,NTP,SMTP
Simultaneous Live View	Up to 6 channels
API	ISAPI,EZVIZ,ONVIF,ISUP,SDK
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address)
Network Storage	NO
Client	iVMS-4200,Hik-Connect
Web Browser	Plug-in required liveview: Chrome 91+, Firefox 88+, Edge 91+
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,AGC,adjustable by client software or web browser
Day/Night Switch	Day,Night,Auto,Schedule
Wide Dynamic Range (WDR)	120 dB
SNR	≥ 52 dB
Image Enhancement	BLC,HLC,3D DNR
Privacy Mask	4 programmable polygon privacy masks
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Built-in Microphone	Yes,1 built-in microphone
Built-in Speaker	NA
Audio	-LIZSU: 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium, -LIZSU: 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium
Alarm	-LIZSU : 1 input, 1 output (max. 12 VDC, 30 mA)
Reset Key	Yes
Event	
Basic Event	Video tampering alarm, motion detection (support alarm triggering by specified target types (human, vehicle)), exception
Smart Event	NO
Linkage	Upload to FTP, notify surveillance center, send email, trigger capture
Deep Learning Function	
Perimeter Protection	NO
Face Capture	NO

General	
Power	12 VDC $\pm$ 25%, 0.8 A, max. 9.6 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, max. 12 W
Material	Cover: Metal, main body: Plastic
Dimension	$\varnothing$ 121.5 mm $\times$ 97.6 mm ($\varnothing$ 4.78" $\times$ 3.84")
Package Dimension	150 mm $\times$ 150 mm $\times$ 141 mm (5.90" $\times$ 5.90" $\times$ 5.55")
Weight	-LIZ(S)U: Approx. 520 g (1.15 lb.)
With Package Weight	-LIZ(S)U: Approx. 736 g (1.62 lb.)
Storage Conditions	-30 °C to 60 °C (22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	English, Russian, Ukrainian, Arabic, Spanish, French, Portuguese, Turkish, Polish, German
General Function	Heartbeat, mirror, password reset via email, password protection, anti-banding
Flashing Light	NA
Approval	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021
Safety	CB: IEC 62368-1:2014+A11, CE-LVD: EN 62368-1:2014/A11:2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013

▪ Dimension

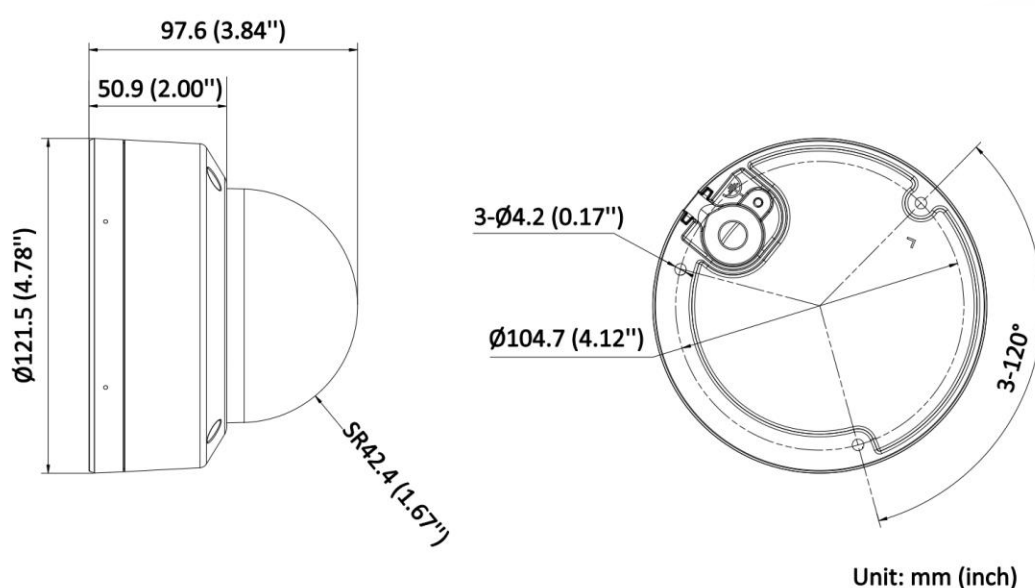



▪ Accessory

▪ Optional

DS-1272ZJ-120(Black)	DS-1275ZJ-S-SUS(Black)	DS-1272ZJ-120B(Black)	DS-1276ZJ-SUS(Black)	DS-1475ZJ-SUS(Black)
				
DS-1476ZJ-SUS(Black)	DS-1275ZJ-SUS(Black)	DS-1271ZJ-120(Black)	DS-220AZJ-145-BA	DS-220AZJ-130-BA
				
DS-1280ZJ-DM46(Black)				
				

■ Installation Methods

Wall Mounting DS-1272ZJ-120(Black) +DS-1253ZJ-M(Black)	Wall Mounting DS-1272ZJ-120B(Black) +DS-1253ZJ-M(Black)	Wall Mounting DS-220AZJ-145-BA	Wall Mounting DS-220AZJ-130-BA	Vertical Pole Mounting DS-1275ZJ-S-SUS(Black) +DS-220AZJ-145-BA
				
Vertical Pole Mounting DS-1475ZJ-SUS(Black) +DS-220AZJ-130-BA	Corner Mounting DS-1276ZJ-SUS(Black) +DS-1253ZJ-M(Black) +DS-1272ZJ-120B(Black)	Corner Mounting DS-1476ZJ-SUS(Black) +DS-220AZJ-130-BA	Corner Mounting DS-1275ZJ-SUS(Black) +DS-1272ZJ-120B(Black)	Pendant Mounting DS-1271ZJ-120(Black) +DS-1280ZJ-DM46(Black)

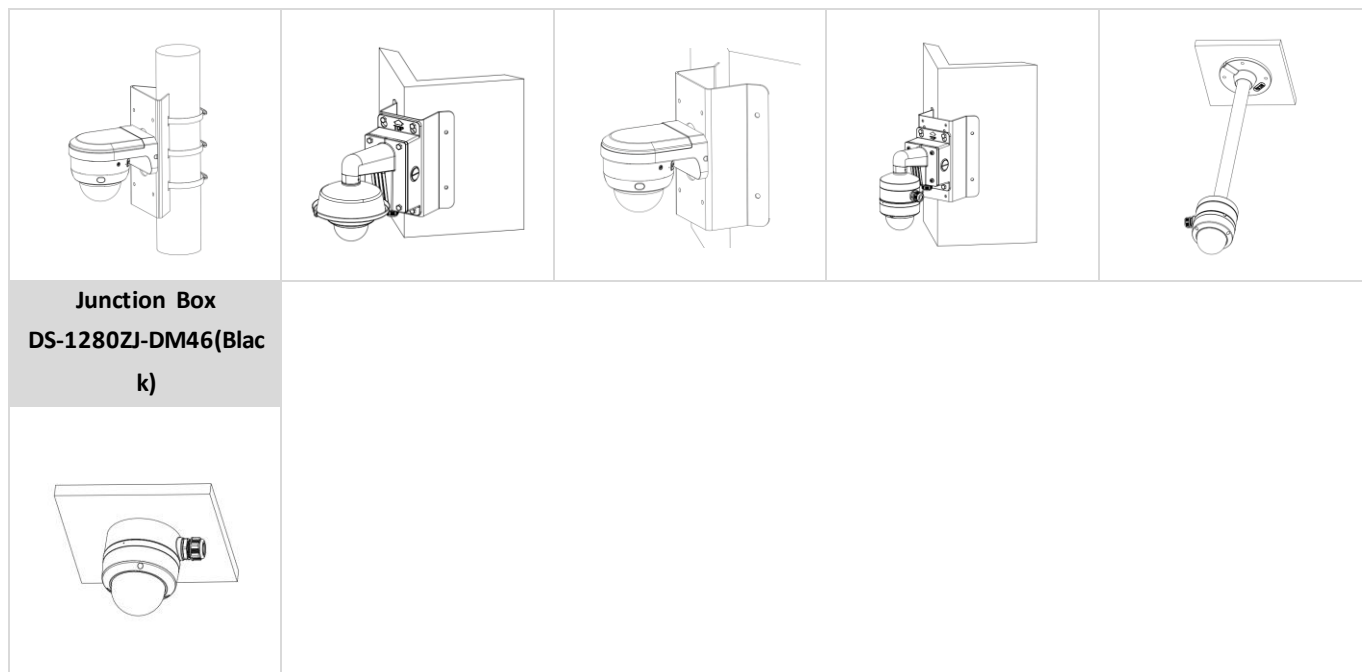

See Far, Go Further



www.hikvision.com
support@hikvision.com

