Radar Speed Sign LED Display (YJP7681-188-***) V5.1.2

Release Note

Legal Information

© 2026 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

This Document (hereinafter referred to be “the Document”) is the property of Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as “Hikvision”), and it cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise expressly stated herein, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Document, any information contained herein.

About this Document

Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Document is subject to change, without notice, due to updates or other reasons.

Please use this Document with the guidance and assistance of professionals trained in supporting the Product.

LEGAL DISCLAIMER

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE DOCUMENT IS PROVIDED "AS IS" AND “WITH ALL FAULTS AND ERRORS”. HIKVISION MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. IN NO EVENT WILL HIKVISION BE LIABLE FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), OR OTHERWISE, IN CONNECTION WITH THE USE OF THE DOCUMENT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

The content of this manual is furnished for informational use only and it is subject to change without notice.

TABLE OF CONTENTS

Chapter 1 Firmware Version 1
Chapter 2 What's New 1
2.1 Support solar power-saving mode and scheduled mode to adjust screen brightness 1
2.2 Support speed unit toggle display, selectable between km/h and mph .. 1
2.3 Support ISAPI listening for integration with third-party platforms 2
2.4 Support ISUP protocol for integration with HCP platform (V3.1.1) 2
2.5 Support Google Mail sending 3
2.6 Support IP modification for NR model LED and 188 screen 4
Chapter 3 Modified sections 5
Chapter 4 Related product list 7
Customer Impact and Recommended Action 7

Chapter 1 Firmware Version


Firmware EEP_TCS001_E_YJP_chip_EN_STD_V5.1.2 build260727

Chapter 2 What's New

2.1 Support solar power-saving mode and scheduled mode to adjust screen brightness


This interface will only appear if solar equipment is connected. Support S80 and S180 models.

Applicable models: YJP7681-188-RL/GLE, YJP7681-188-R, YJP7681-188-NR

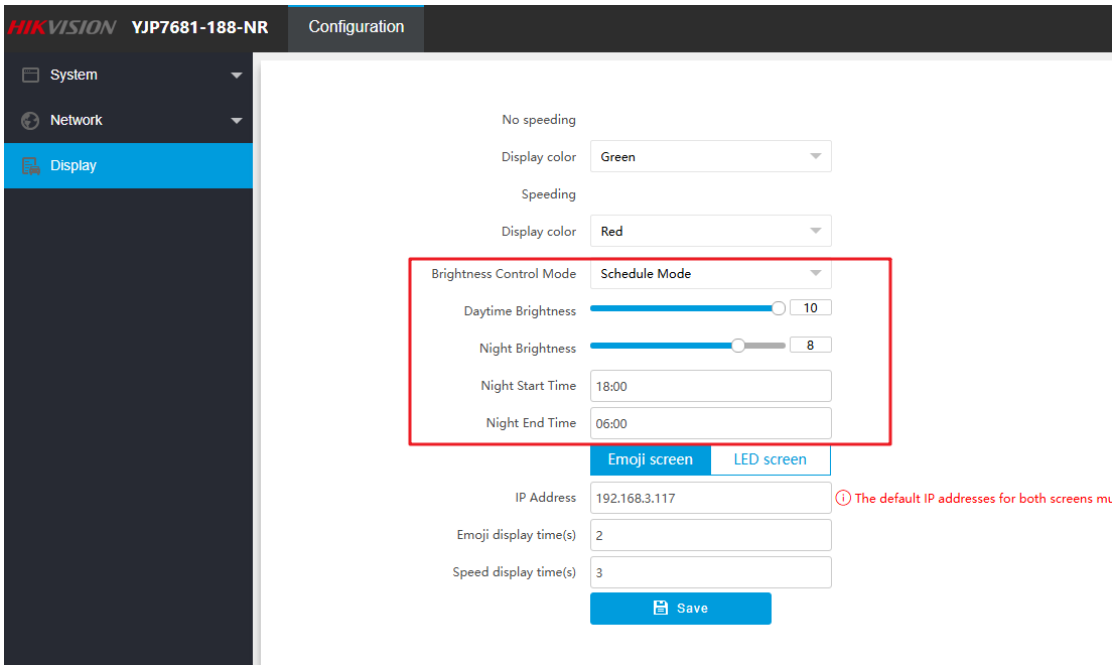


2.2 Support speed unit toggle display, selectable between km/h and mph

The default unit is kilometers. Applicable models: YJP7681-188-RL/GLE , YJP7681-188-R

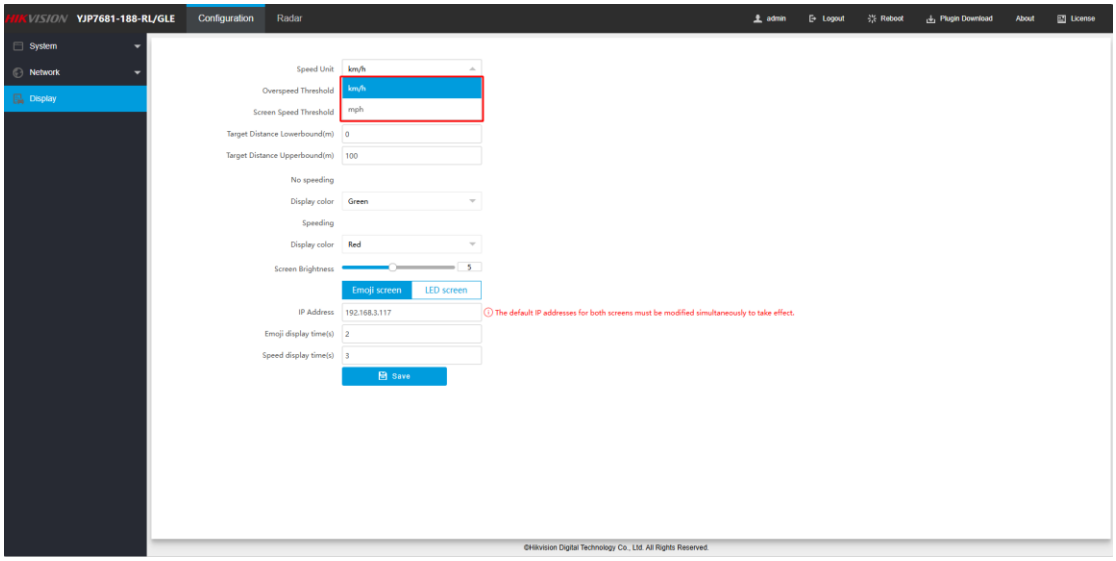


2.3 Support ISAPI listening for integration with third-party platforms

Upload speed and traffic flow information.

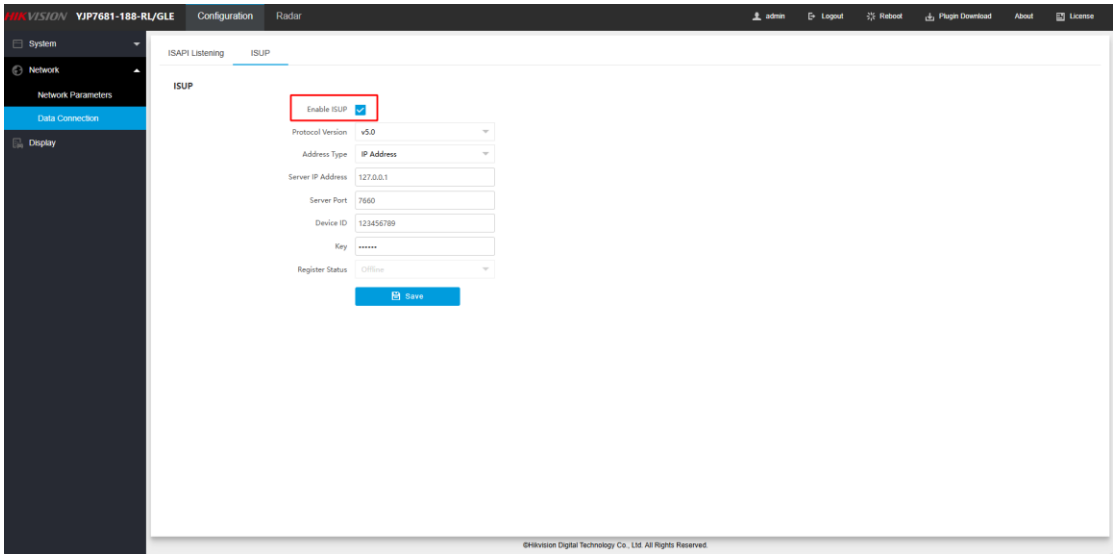


2.4 Support ISUP protocol for integration with HCP platform (V3.1.1)

Upload solar energy charge information.

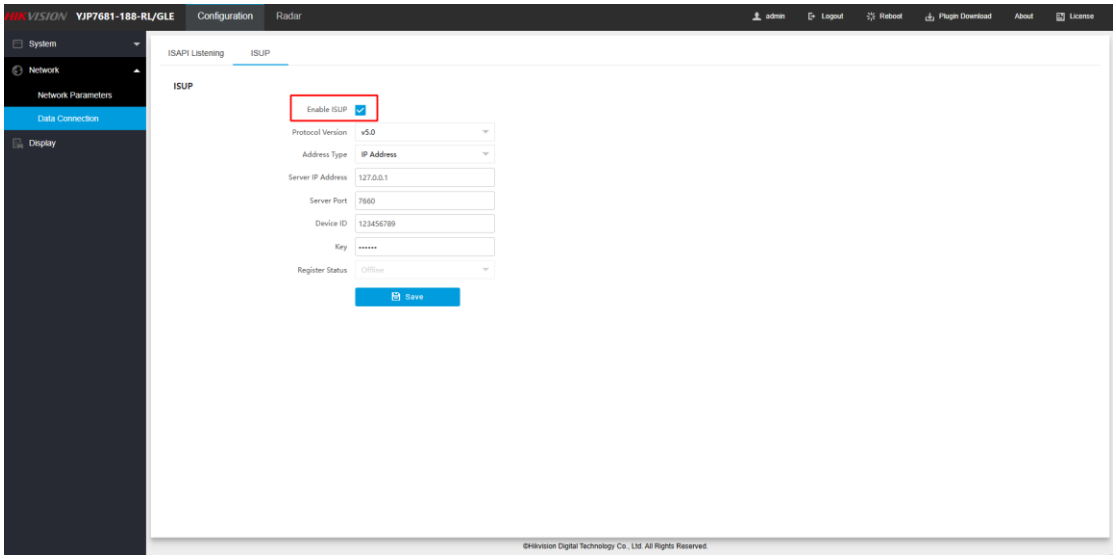


2.5 Support Google Mail sending

Applicable model: YJP7681-188-RL/GLE

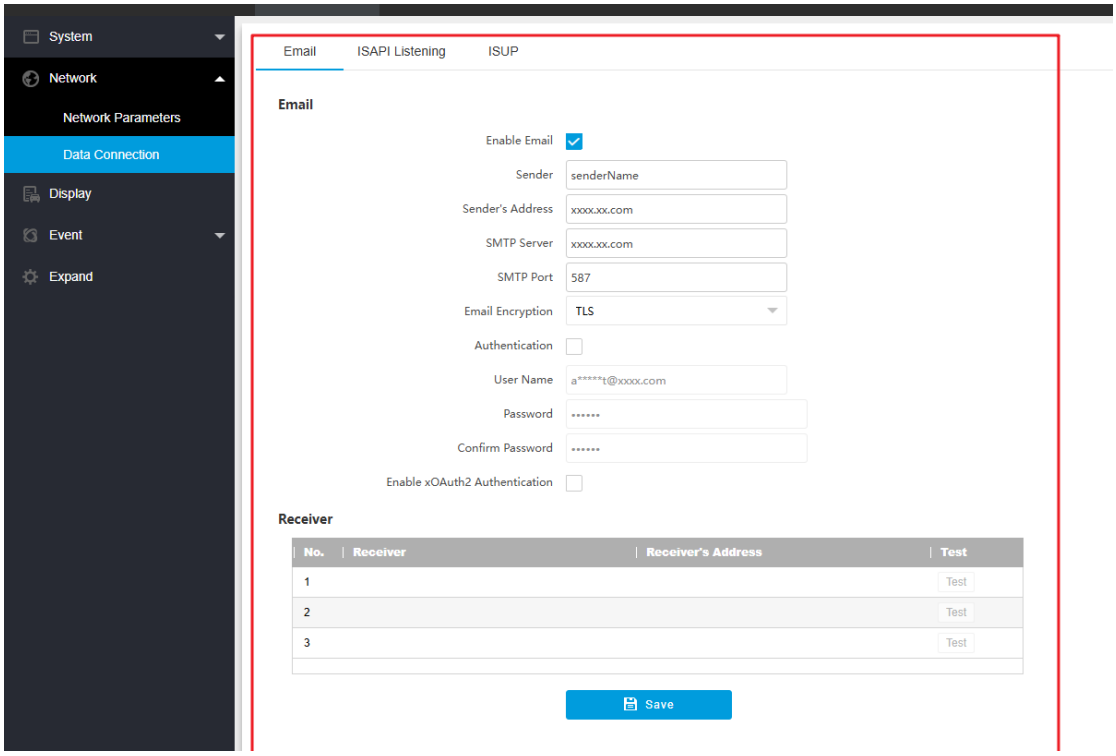


2.6 Support IP modification for NR model LED and 188 screen

Applicable model: YJP7681-188-NR

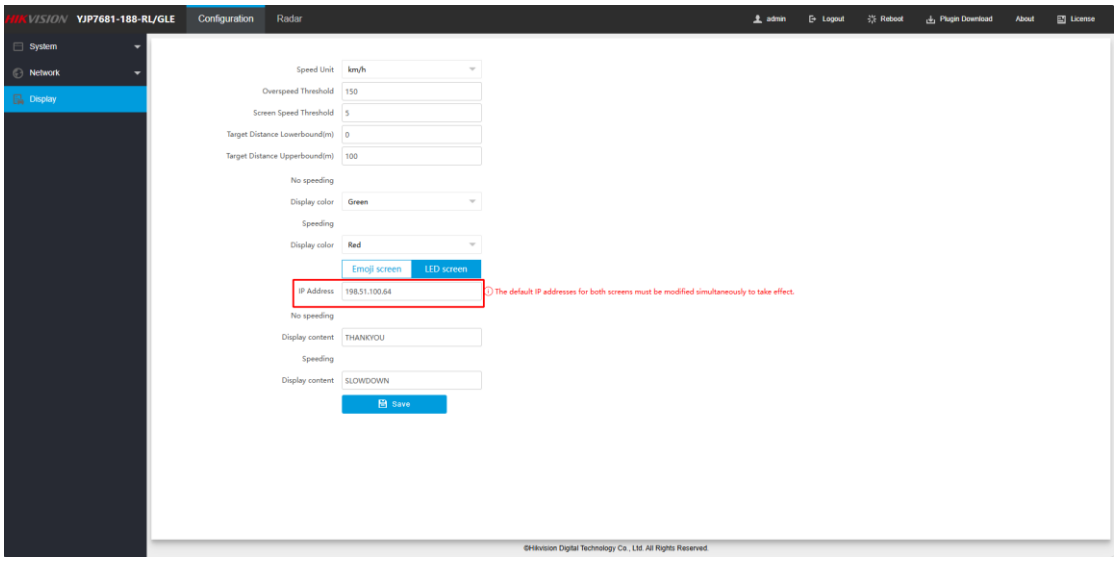


Chapter 3 Modified sections


1. Default HTTP port is disabled and HTTPS is enabled. Applicable models: YJP7681-188-RL/GLE , YJP7681-188-R , YJP7681-188-NR

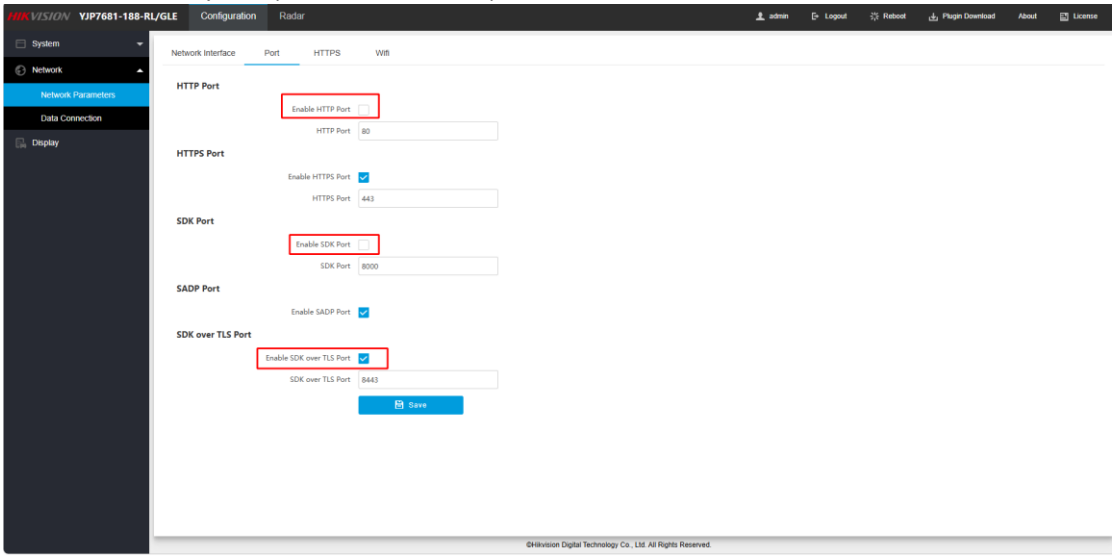


2. Default SDK port is disabled; an SDK port enable option is added, and the SDK OVER TLS port is enabled.

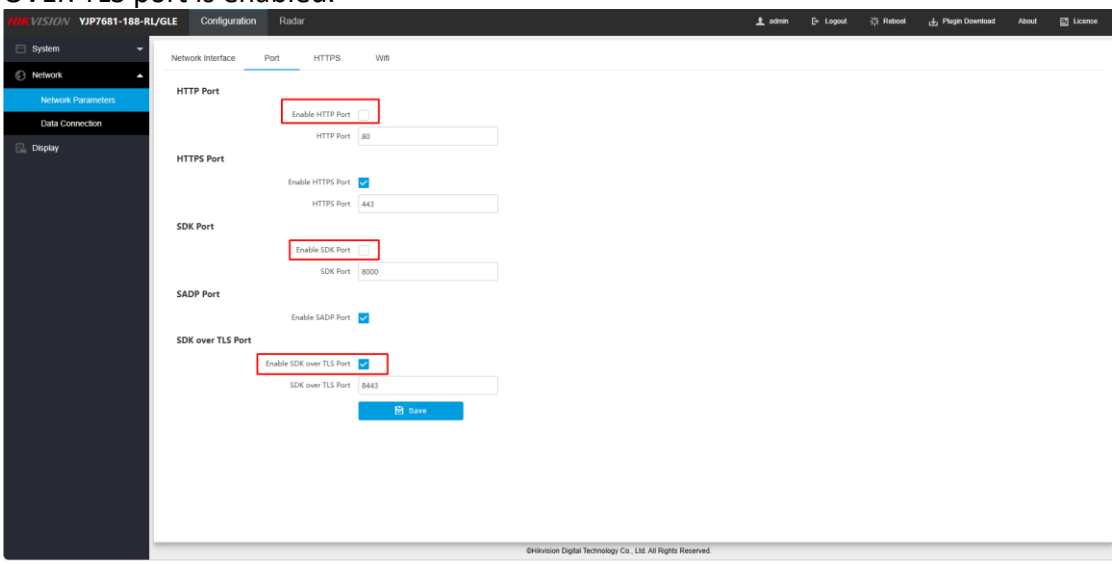


3. Wi-Fi security mode only retains the WPA2/AES method.

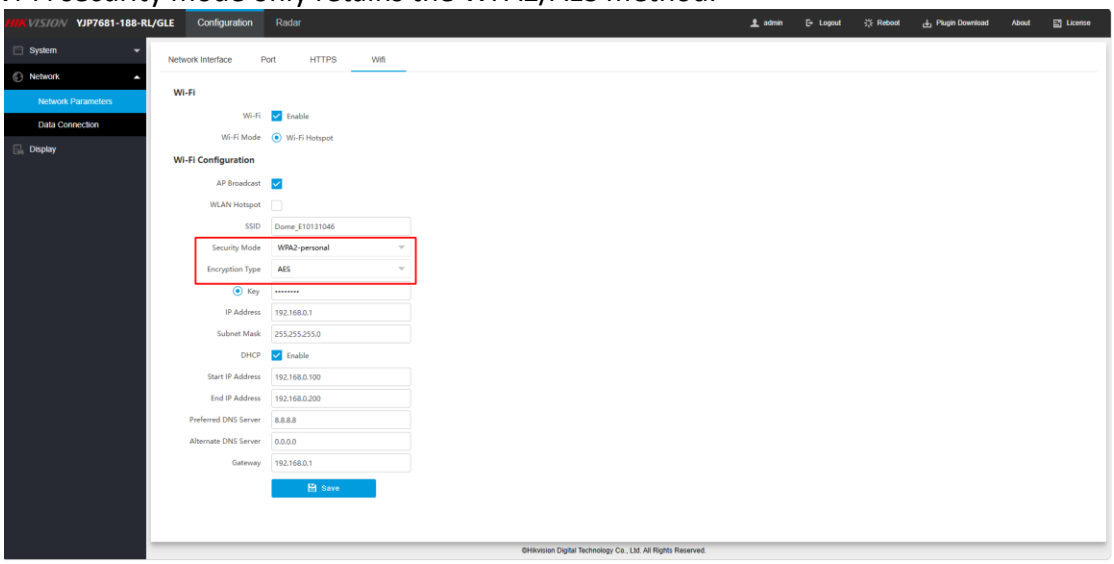

4. The default email encryption method is set to TLS. Applicable model: YJP7681-188-RL/GLE.

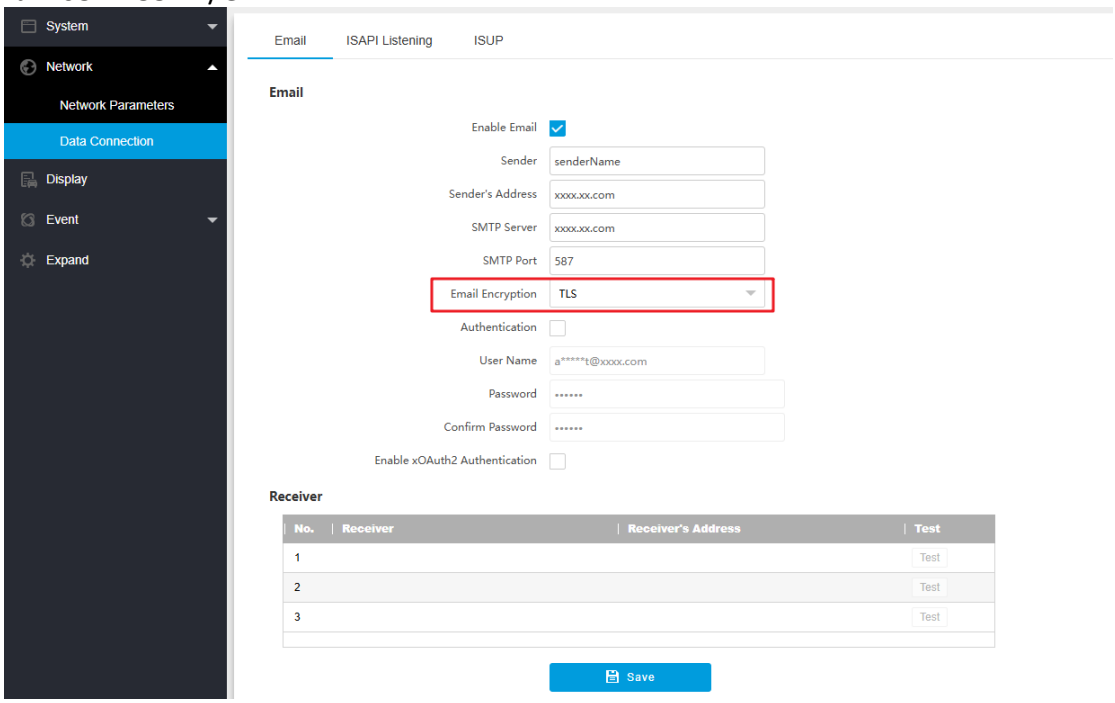

5. Low battery alarm range 10-50%, default value changed to 30%. Applicable models: YJP7681-188-RL/GLE , YJP7681-188-R.

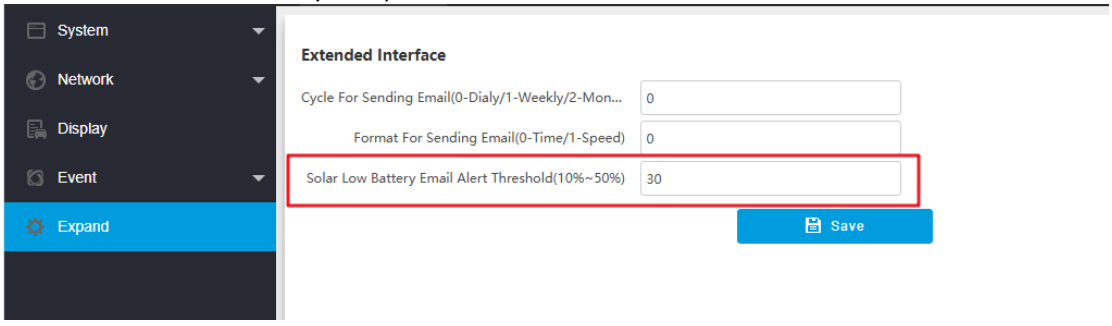

Chapter 4 Related product list

Radar Speed Sign LED Display	YJP7681-188-RL/GLE(O-STD) YJP7681-188-R(O-STD) YJP7681-188-NR(O-STD)

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support team.

Note

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.


See Far, Go Further