

## DS-TPE104

### Charge-Management Entrance Control Terminal



- Fan-free design, but possesses a good cooling effect with the fine aluminum alloy inner structure
- Supports dual 1000 Mbps network card
- Supports standard RS-232 interface
- Built-in 3.5" surveillance-level hard disk, supporting large-capacity image storage
- Equipped with 3.5 mm standard audio interface, and HDMI/VGA interfaces




## ▪ Specification

Terminal	
CPU	Apollo Lake Platform Processor; 1.5 GHz
Memory	4 GB
Storage	1 x 3.5" Surveillance-Level Hard Disk (Optional Capacity: 1T/2T/4T)
Interface	
Indicator	4 Indicators (1 x System Indicator, 1 x Hard Disk Status Indicator, 1 x Power Indicator, 1 x Alarm Indicator)
Audio	1-ch Audio Input (MIC IN); 1-ch Audio Output (AUDIO OUT)
Video Output	1 x HDMI, 1 x VGA
Alarm Input	4-ch Alarm Input (ALARM IN), Voltage Range: 0 V to 60 V
Alarm Output	4-ch Alarm Output (ALARM OUT), Voltage Range: 0 V to 60 V
RS-232	RS-232 Interface
RS-485	2 x RS-485 Interface
USB	4 x USB 3.0 Interface
Network Interface	5 x 100 Mbps/1000 Mbps Self-Adaptive Interface, supporting connecting with switch; 1 x Independent 100 Mbps/1000 Mbps Self-Adaptive Interface, supporting network isolation
Bracket	
Material	Black Aluminum Material
General	
Working Temperature and Humidity	-20 °C to 70 °C (-4 °F to 158 °F); 10 % to 95% (No Condensation)
Power Supply	12V DC /5A
Power Consumption	Max.: 50 W Average: 25 W
Dimensions	245 × 170 × 65 mm (9.65 × 6.69 × 2.56 inch)
Weight	2 kg (4.4 lb.)
Weight (with Package)	2.5 kg (5.5 lb.)
Dimensions (with Package)	450 × 240 × 105 mm (17.7 × 9.45 × 4.1 inch)
Material	Black Aluminum Material

## ▪ Available Model

DS-TPE104(2T+128G SSD)

## ▪ Dimension

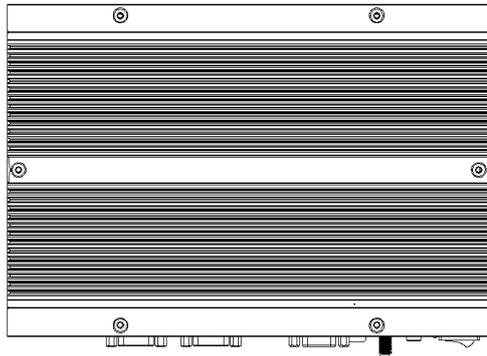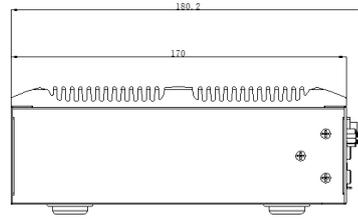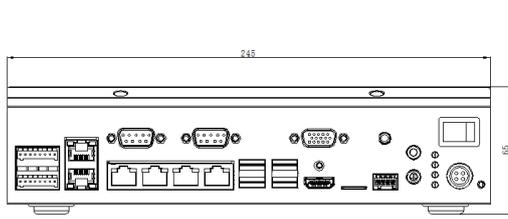

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T. +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

