

DS-QAZ0203G1-S
3 W Ceiling Secondary Speaker




- Connecting the primary speaker for amplification.

▪ Specification

Speaker	
Rated Power	3 W
Impedance	8 Ω
Direction	All directions
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	97 dBSPL
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Coverage Angle	Conical Coverage: 130°
Interface	
Audio In	Fixed resistance input $\times 1$, 8 Ω *The primary speaker(3 W, 8 Ω) can be connected to a maximum of 3 secondary speakers(3 W, 8 Ω).
General	
Operating Temperature	10 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$
Material	Device body: plastic; Mesh cover: metal
Dimension	$\varnothing 179 \text{ mm} \times 77.5 \text{ mm}$ ($\varnothing 7.05'' \times 3.05''$) (Hole Size: 160 mm)
Package Dimension	255 mm \times 243 mm \times 175 mm (10.04" \times 9.57" \times 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device $\times 1$ Mesh cover $\times 1$ Regulatory Compliance and Safety Information $\times 1$
Operating Humidity	< 90% (No condensation)


▪ Wiring

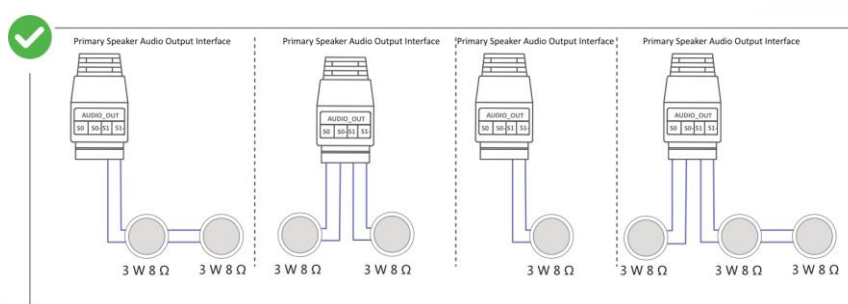

▪ Available Model

DS-QAZ0203G1-S

▪ Dimension

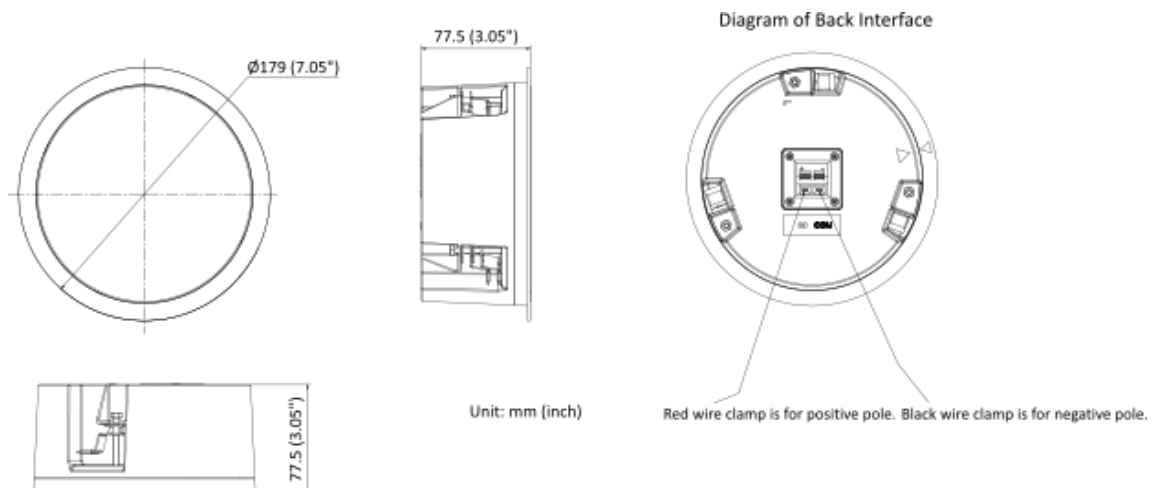

See Far, Go Further



www.hikvision.com
support@hikvision.com

