

DS-2XM6726G1-IM/ND/F

- High quality imaging with 2MP resolution
- 2.8/4mm fixed lens
- Clear imaging against strong back light due to 120 dB WDR technology
- Water and dust resistant (IP67) and vandal resistant(IK10)
- Built-in deep-learning algorithm

▪ Specification


Camera	
Protection Level	IP67, IK10
Min. Illumination	0.002 Lux @ (F1.6, AGC ON)
Resolution	1920x1080
Shutter Speed	1/3 s to 1/100,000 s
P/N	PAL: 25fps NTSC: 30fps
Wide Dynamic Range	120 dB
Day & Night	IR Cut Filter
Angle Adjustment	Pan: -30° to +30°, Tilt: 0° to 75°, Rotate: 0° to 360°
Sensor Type	1/2.8" CMOS Progressive Scan
White Balance	Support fluorescent lamp/incandescent lamp/warm lamp/nature light, and support auto/manual
Lens	
Focal Length	2.8mm/4mm
Focal Length & FOV	2.8 mm, horizontal FOV 105°, vertical FOV 56°, diagonal FOV 126° 4 mm, horizontal FOV 87°, vertical FOV 44°, diagonal FOV 104°
Lens Mount	M12
Max. Aperture	2.8mm/4mm: F1.6
Illuminator	
Supplement Light Type	Infrared fill light lamp
IR Wavelength	850 nm
IR Range	Up to 5 m
Video	
Main Stream	50Hz:25fps (1920x1080, 1280 x 960, 1280x720) 60Hz:30fps (1920x1080, 1280 x 960, 1280x720)
Sub-Stream	50Hz:25fps (704x576, 640x480, 352x288, 320x240) 60Hz:30fps (704x576, 640x480, 352x288, 320x240)
Video Compression	Main stream: H.264, H.265 Sub-stream: H.264, H.265, mjpeg
Video Bit Rate	Main stream: 256Kbps-12Mbps Sub-stream: 256Kbps-4Mbps
H.264 Type	BaseLine Profile/Main Profile/High Profile
H.265 Type	Main Profile
Bit Rate Control	Constant Bit Rate, Variable Bit Rate
Region Of Interest (ROI)	Support 1 fixed region for each stream (Main Stream, Sub Stream)
Audio	
Audio Compression	G711U, G711A, G726_A, AAC,G722.1, PCM
Audio Bit Rate	Raw data PCM:256kbps G711U, G711A, G726_A, AAC,G722.1:≤64kbps
Audio Sampling Rate	16 kHz

Network	
Protocols	TCP/IP, HTTP, HTTPS, DHCP, DNS, DDNS, RTSP, SNMP, QOS, FTP, NTP, UPNP, SMTP, ICMP, IPV6, UDP, SSL/TLS
Simultaneous Live View	Up to 8 channels
API	ONVIF (PROFILE S/G/T), ISAPI, SDK
User Management	Up to 16 users, 3 levels: Administrator, Operator and User
Web Browser	IE8+, Chrome57+, Edge16+, Firefox52+
Image	
Image Settings	Brightness, contrast, saturation and sharpness can be adjusted by browser and client software.
Day/Night Switch	Day/Night/Auto/Schedule
Image Enhancement	BLC, HLC, 2DNR, 3DNR
Backlight Compensation(BLC)	Support up, down, left, right, center and custom BLC adjustment
Interface	
Audio	1 built-in mic
Reset Key	Yes
Interface Type	Interpolate
TF Card Storage	Built-in Micro TF Slot, up to 256 GB(not for baseline. Note the Micro-TF card capacity when ordering)
DORI	
DORI	2.8 mm, D: 11.7m to 29.5m, O: 5.9m to 11.57m, R: 2.9m to 5.9m, I: 0.8m to 2.9m 4 mm, D: 16.1m to 40.5m, O: 8.1m to 16.1m, R: 4m to 8.1m, I: 1.6m to 4m
Event	
Basic Event	Video tampering alarm, Exception (illegal login, HDD full, HDD error)
Smart Event	Supports object capture, Object De-duplication
Linkage	Notify monitoring center
General	
Product Dimension	Camera: $\Phi 110.0$ mm $\times$ 57.4 mm (4.3" $\times$ 2.3")
Power	PoE: 0.30 A to 0.20 A, max: 7.5W
Camera Material	Metal
Screw Material	SUS
Package Dimension	252 mm $\times$ 160 mm $\times$ 95 mm (9.9" $\times$ 6.3" $\times$ 3.7")
Product Weight	Approx. 452g (1lb.)
Startup and Operating Conditions	-30 °C to 75°C (-22 °F to 167°F), humidity less than 95% or less (non-condensing)
Language	English, French, German, Russian, Italy, Korean, Portugal, Spanish, Turkish, Poland, Czech
General Function	Anti-flicker, heartbeat, mirror
Power Supply	PoE (802.3af, 36 V to 57 V)
Power Interface	-IM/ND: four-core M12 aviation plug, PoE power supply
Cable Length	50 cm
Selection Parameter	
POE Support	PoE (802.3af)

Approval	
EMC	CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014);
Safety	CB: IEC 60950-1 CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013);
Environment	CE-RoHS (2011/65/EU);
Electrical Safety Protection	IP67(IEC 60529-2013);IK10(IEC 62262:2002)

Wiring

Cable Interfaces


IM/ND	M12D4F	1.IPC_TX+ 2.IPC_RX+ 3.IPC_TX- 4.IPC_RX-	
-------	--------	--	--

Available Model

DS-2XM6726G1-IM/ND/F(2.8mm)

DS-2XM6726G1-IM/ND/F(4mm)

Dimension

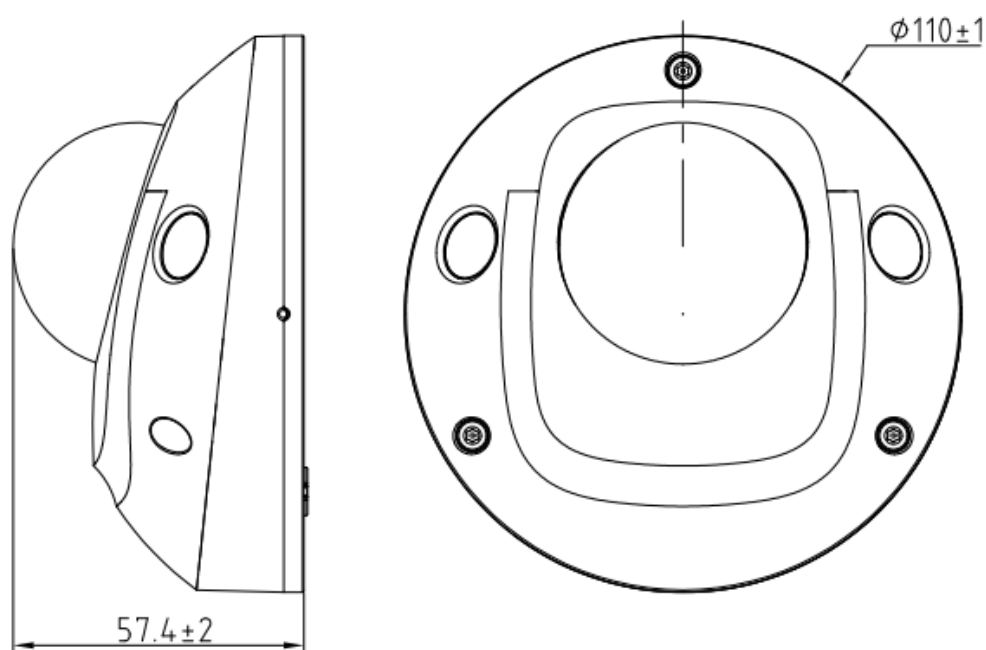

See Far, Go Further



www.hikvision.com
support@hikvision.com

