

## DS-K1F510-P Enrollment Station



- Supports palm print and palm vein function
- Plug-and-play USB with no-driver technology, USB 2.0
- Supports Windows system




# Specification

System	
Operating system	Linux
Authentication	
Palm print and palm vein	5 cm ~12 cm
recognition distance	
General	
Indicator	Support
Power supply	5 VDC, 1 A
Power consumption	5 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10 % to 90 % (no condensing)
Dimensions	149.87 mm × 86.18 mm × 23.4 mm (5.90" × 3.39" × 0.92")
Application environment	Indoor

### Available Model

DS-K1F510-P

### Dimension

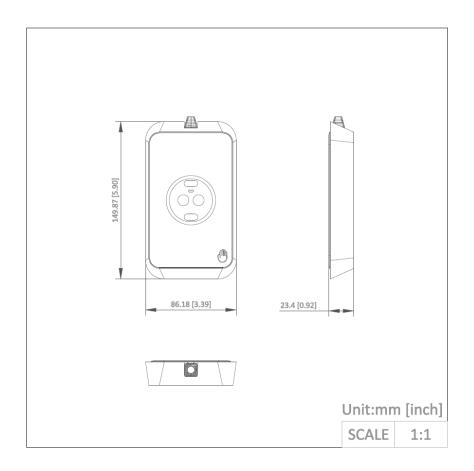



Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision Corporate Channel



6 hikvisionhq