

DS-2CE76D0T-EXIP 2 MP Indoor Fixed Turret Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm fixed lens
- Up to 20 m IR distance for bright night imaging

▪ Specification


Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.02 Lux @ (F2.5, AGC ON) , 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s;NTSC: 1/30 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Lens	
Lens Type	2.8 mm, 3.6 mm Fixed Lens
Focal Length & FOV	2.8 mm, horizontal FOV: 91°, vertical FOV: 47°, diagonal FOV: 113° 3.6 mm, horizontal FOV: 73°, vertical FOV: 39°, diagonal FOV: 88°
Lens Mount	M12
Illuminator	
Supplement Light Range	Up to 20 m
Image	
Frame Rate	TVI: 1080p @25 fps/30 fps
Image Parameters Switch	STD/HIGH-SAT
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	Auto
Image Enhancement	BLC,HLC,Global,DWDR
Noise Reduction	2D DNR
Image Settings	Brightness,Contrast,Anti-banding,Sharpness
Interface	
Video Output	1 HD analog output
General	
Language	English
Power	12 VDC ± 25%, max. 1.8 W
Operating Condition	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Material	Plastic
Communication	HIKVISION-C
Dimension	Ø 84.6 mm × 78.9 mm (Ø 3.33" × 3.11")
Weight	Approx. 130 g (0.29 lb.)

▪ Available Model

DS-2CE76D0T-EXIP(2.8mm)

DS-2CE76D0T-EXIP(3.6mm)

▪ Dimension

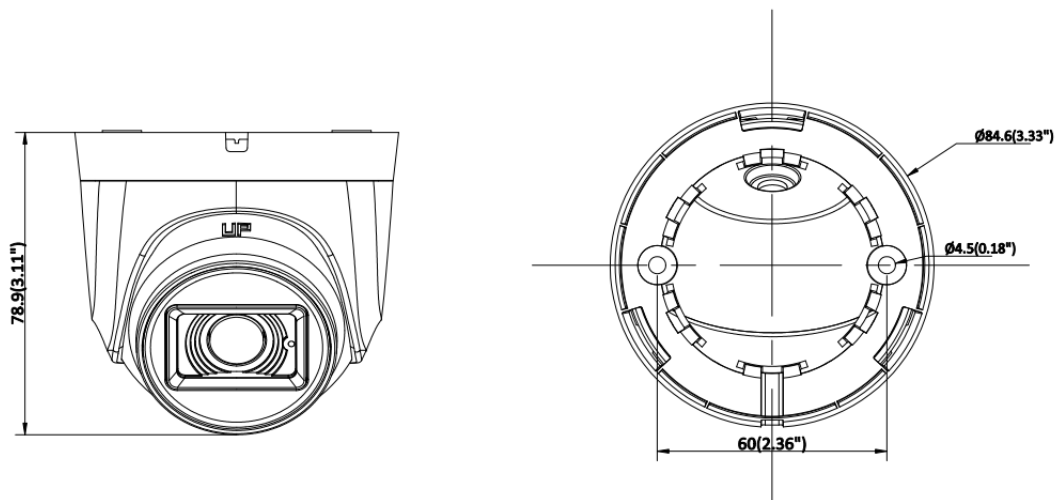

Unit: mm (inch)

▪ **Accessory**

▪ **Optional**

DS-1272ZJ-110-TRS Wall mount	DS-1275ZJ-SUS Vertical pole mount	DS-1276ZJ-SUS Corner mount	DS-1280ZJ-XS Junction box
			

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq