

HK-SFP+-10G-20-1310-DF SFP Module




- Single Power Supply 3.3V
- Digital diagnostic monitor compatible with SFF-8472
- Duplex LC Connector
- Hot Pluggable Capability
- Compliant With ROHS Standard
- Cost effective SFP solution, enables higher port densities and greater bandwidth
- Support 10G Ethernet, CPRI and Fiber Channel

▪ Specification

General	
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Temperature	0 °C to 70 °C (32 °F to 158 °F)
Power Supply	DC 3.3V
Relative Humidity	30% to 80% (no condensation)
Optical Module Parameters	
Optical Interface	LC
Fiber Type	SMF, Duplex fiber, 9/125um
Transmission Distance	0~20km
Wavelength	Tx1310nm/Rx1310nm
Transmit Power	-5~1dBm
Receiver Sensitivity	-15dBm


▪ Typical Application

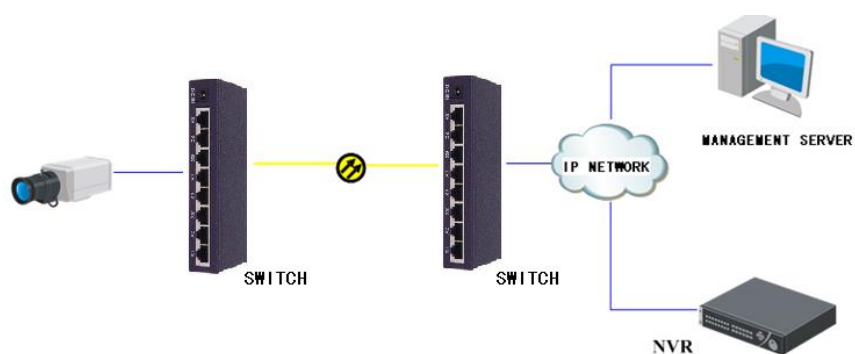

▪ Available Model

HK-SFP+-10G-20-1310-DF

▪ Dimension

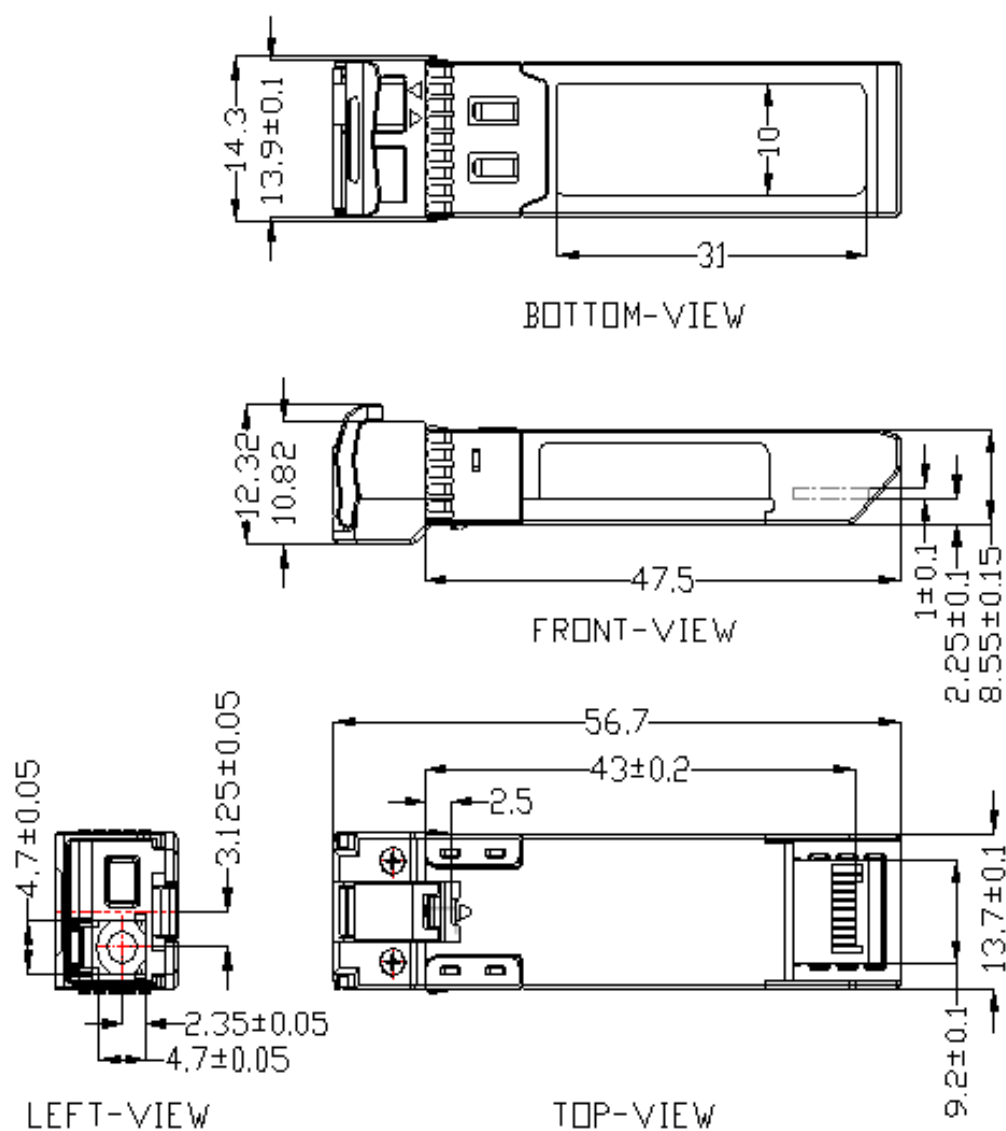

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

