

**DS-K3G200BX**  
**Value Tripod Turnstile**

- Fire alarm passing: when the fire alarm is triggered, the barrier will be dropped automatically for emergency evacuation.
- Easy to configuration though PC web & Mobile web.
- Bidirectional (entering/exiting) lane.
- Valid passing duration settings: system will cancel the passing permission if a person does not pass through the lane within the valid passing duration.

## ▪ Specification



System	
Motor	/
MCBF	≥ 3 million times
Network	
Wired network	10/100 Mbps self-adaptive Ethernet
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	2
Wiegand	2
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Capacity	
Card capacity	500,000
Event capacity	500,000
Authentication	
Card	EM card, M1 card, and DESfire card
Function	
Configuration via PC Web	Support
Configuration via mobile Web	Support
Audio prompt	Support
Keypad configuration	Support
Communication protocol	ISAPI
Keyfob	Not support
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1 mm stainless pipe
Pedestal material	SUS304 stainless steel 1 mm
Power consumption	Standby: 20 W Working: 35 W Peak: 45 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	/
Dimensions	Without package: 426 mm × 268 mm × 982.5 mm (16.77" × 10.55" × 38.68") With package: 700 mm × 430 mm × 1140 mm (27.56" × 16.93" × 44.88")
Weight	Net: 24.26 kg (53.48 lb) Gross: 30.77 kg (67.84 lb)

Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz,
Language	Arabic, Indonesian, Japanese, Kazakh, Portuguese (Brazil), Spanish (Mexico), Spanish (Spain), Thai, Russian, English
<b>Configuration</b>	
Application environment	Indoor

▪ **Available Model**

DS-K3G200BX

▪ **Dimension**

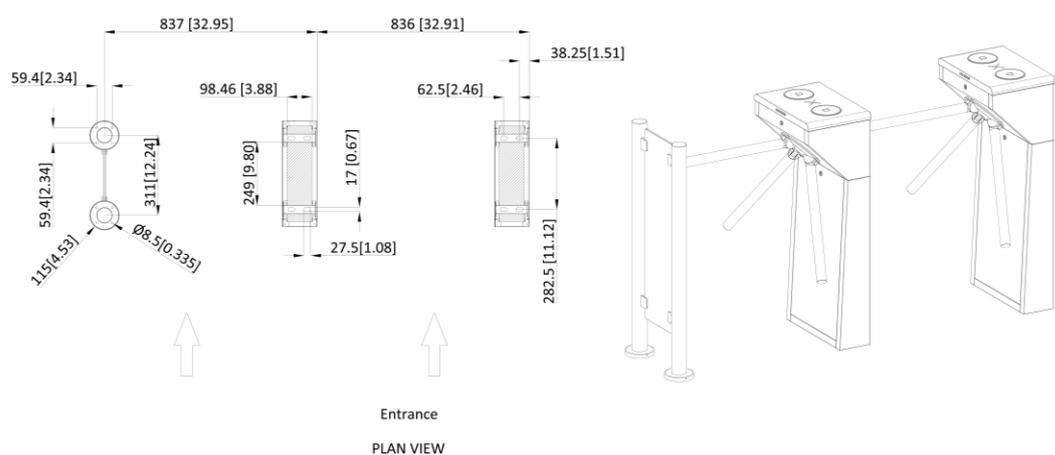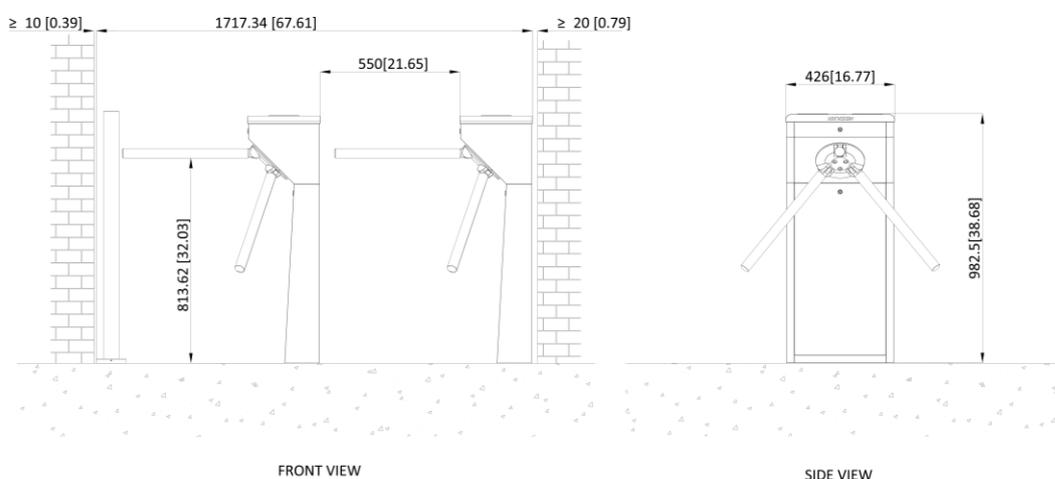

Unit: mm [inch]  
SCALE 1:1

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

