

DS-K3G301BX **Value Tripod Turnstile**



- Fire alarm passing: when the fire alarm is triggered, the barrier will be dropped automatically for emergency evacuation.
- Easy to configuration though PC web & Mobile web.
- Bidirectional (entering/exiting) lane.
- Valid passing duration settings: system will cancel the passing permission if a person does not pass through the lane within the valid passing duration.

▪ Specification


System	
Motor	/
MCBF	≥ 3 million times
Network	
Wired network	10/100 Mbps self-adaptive Ethernet
Interface	
Network interface	1
Lock control	2
Exit button	2
Alarm output	2
RS-485	4
RS-232	2
Wiegand	2
Fire alarm input	1
Case input	2
Hardware	
Access controller	Supplied
Capacity	
Card capacity	500,000
Event capacity	500,000
Authentication	
Card	EM card, M1 card, and DESfire card
Function	
Configuration via PC Web	Support
Configuration via mobile Web	Support
Audio prompt	Support
Keypad configuration	Support
Communication protocol	ISAPI
Keyfob	Not support
General	
Throughput	30 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1 mm stainless pipe
Pedestal material	SUS304 stainless steel 1.0 mm and SUS304 stainless steel 0.8 mm
Power consumption	Standby: 20 W Working: 35 W Peak: 45 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	Without package: 1200 mm × 233 mm × 1000 mm (47.2" × 9.2" × 39.4") With package: 1350 mm × 410 mm × 1130 mm (53.1" × 16.1" × 44.49")
Weight	Net: 31.15 kg (68.67 lb); Gross: 39.15 kg (86.31 lb)

Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz,
Language	Arabic, Indonesian, Japanese, Kazakh, Portuguese (Brazil), Spanish (Mexico), Spanish (Spain), Thai, Russian, English
Configuration	
Application environment	Outdoor

▪ Available Model

DS-K3G301BX

▪ Dimension

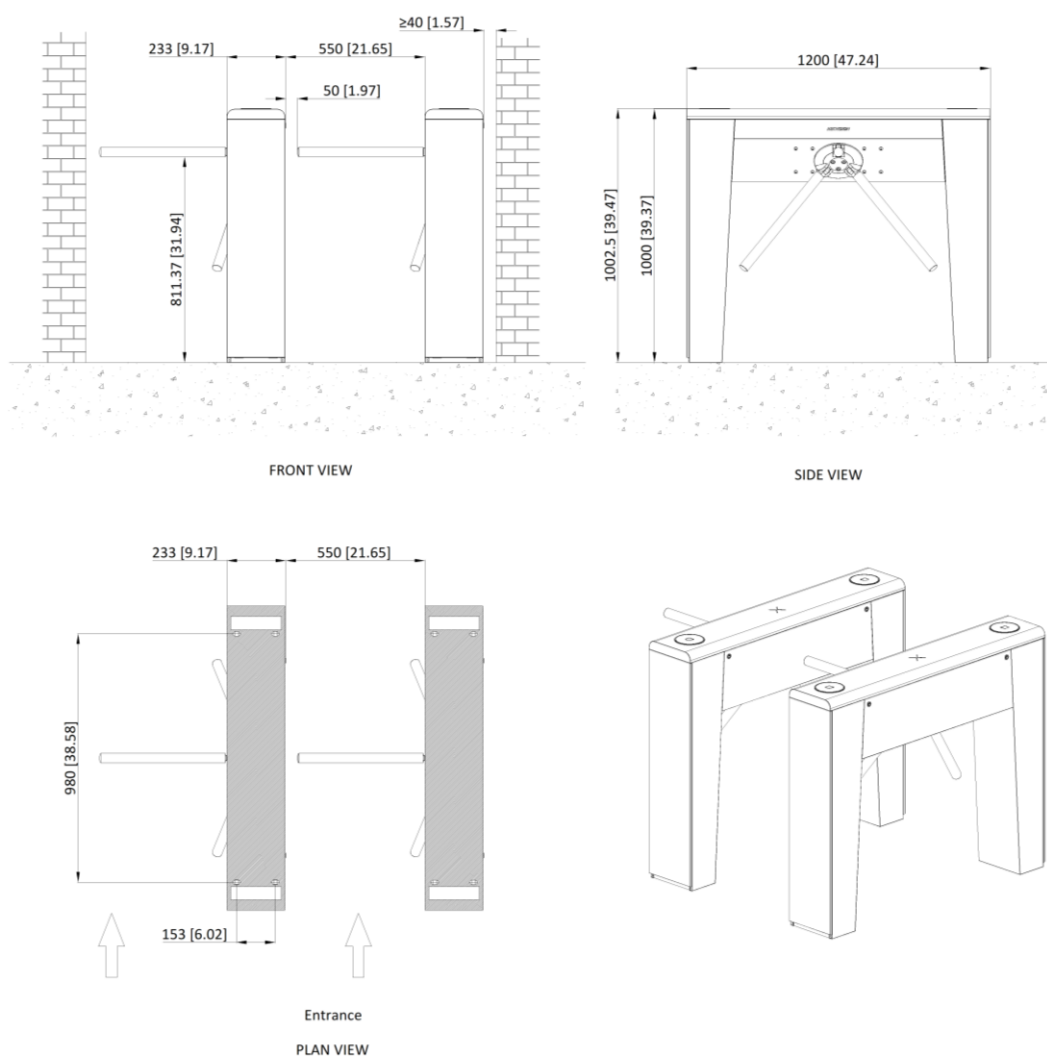

Unit: mm [inch]
SCALE 1:1

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq